



State of Utah

JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

Department of Administrative Services

KIMBERLY K. HOOD
Executive Director

Division of Facilities Construction and Management

F. KEITH STEPAN
Director

ADDENDUM #1

Date: April 12, 2007

To: Contractors

From: S'ean Crawford, Project Manager, DFCM

Reference: New Clearfield Maintenance Facility
Utah Department of Transportation – Clearfield, Utah
DFCM Project No. 06034900

Subject: **Addendum No. 1**

Pages	Addendum	1	page
	<u>Architect's Addendum & Specs.</u>	<u>3</u>	<u>pages</u>
	Total	4	pages

Note: This Addendum shall be included as part of the Contract Documents. Items in this Addendum apply to all drawings and specification sections whether referenced or not involving the portion of the work added, deleted, modified, or otherwise addressed in the Addendum. Acknowledge receipt of this Addendum in the space provided on the Bid Form. Failure to do so may subject the Bidder to disqualification.

1.1 SCHEDULE CHANGES – There are no project schedule changes per this addendum.

1.2 GENERAL: Archiplex Group Addendum & Specifications.

End of Addendum #1



addendum #1

DATE: April 12, 2007

DFCM Project No. 06034900
Archiplex Group Project No. 0609.01

ADDENDUM NO. 1 to the Contract Documents for the Construction of UDOT Maintenance Station #1424, Clearfield, Utah.

The contents of this addendum supersede the information contained in the original Contract Documents and are hereby incorporated therein. Unless otherwise so stated, any changes herein offset only the specific drawings, words, or paragraphs mentioned, and the balance of the drawings and specifications remain in full force.

A. DESCRIPTION OF ADDENDUM ITEMS:

1. General Information:

- a. Contact person at Rocky Mountain Power has not been established. The work order No. for this project is: #5006307

2. Architectural Addendum Items:


- a. Delete Specification #03055 in its entirety.
- b. **Sheet G000** – Add note "CONSTRUCTION OF NEW STATE BUILDINGS AND REMODELING OF EXISTING BUILDINGS SHALL COMPLY WITH ALL THE REQUIREMENTS OF THE DFCM STANDARDS, INCLUDING ENHANCED ACCESSIBILITY. THE DFCM STANDARDS CAN BE FOUND AT THE FOLLOWING WEB SITE: www.dfcu.utah.gov.
- c. **Sheet AE401** – Revise Detail B2/AE401 to include notes and vertical grab bar. See attached sheet 1.1.
- d. **Sheet AE501** – Add General Note #4: CONTRACTOR TO ENSURE THAT THE METAL BUILDING MANUFACTURER PROVIDES STRUCTURAL GIRTS IN SUFFICIENT QUANTITY TO SUPPORT INTERIOR FINISHES.
- e. **Sheet AE502** – Revise Keynote Legend to include Keynote: "09678.E1 – RUBBER BASE"



- f. **Sheet AE602** – Add General Note #5 ALL INTERIOR WALL AND CEILING FINISHES SHALL BE CLASS C: FLAME SPREAD 76-200; SMOKE-DEVELOPED 0-450. EXCEPTION: MATERIALS, OTHER THAN TEXTILES, TESTED IN ACCORDANCE WITH SECTION 803.2.

B. ATTACHMENTS:

Supplemental Drawings 1.1

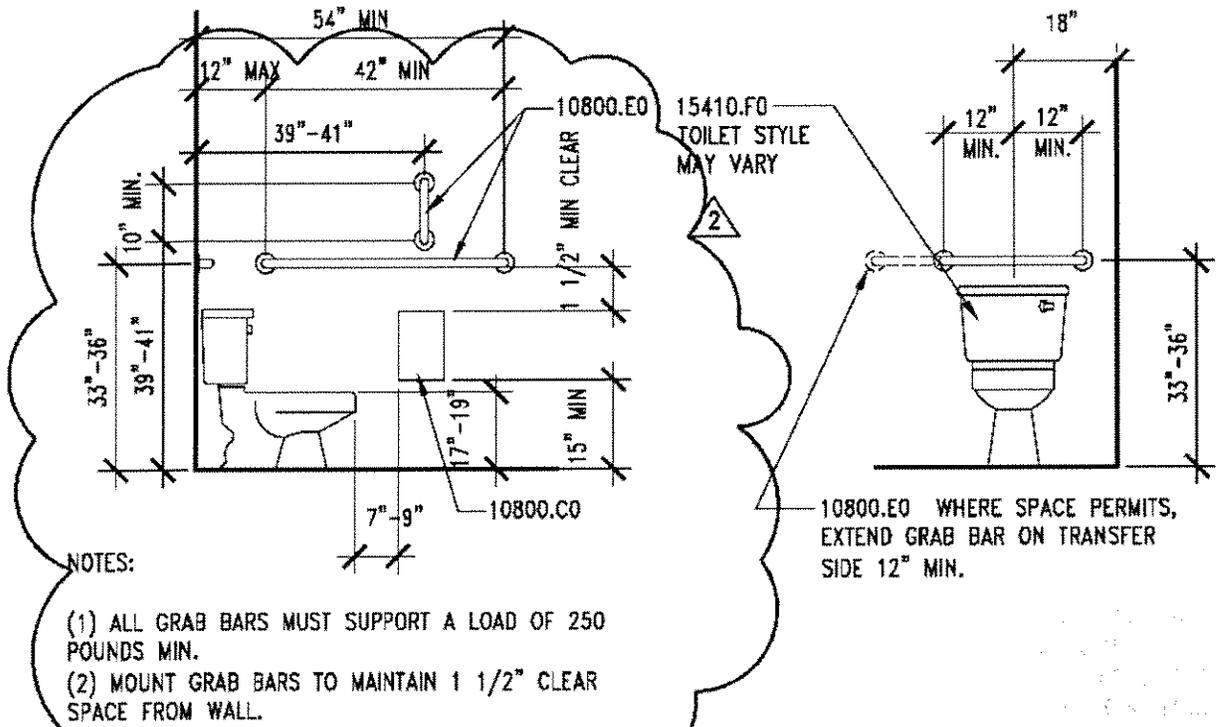

B2 | ACCESSIBLE TOILET DETAIL

XCF-AEDT82A401

AE401

REF. AE401

SCALE: 3/8" = 1'-0"

 <p>architecture • planning • design services 1135 South West Temple, Ste. A Salt Lake City, UT 84101 P: (801) 961-7070 F: (801) 961-7373</p>	<p>PROJECT: CLEARFIELD MAINT. FACILITY STATION #1424 2001 EAST 700 SOUTH CLEARFIELD, UTAH 84015</p>	<p>PROJECT NO: 0609.01</p>	<p>ADDENDUM #1</p> <h1>1.1</h1>
		<p>DATE: APRIL 12, 2007</p>	
		<p>BY: K. PHILLIPS</p>	
	<p>SUBJECT: ACCESSIBLE TOILET DETAIL</p>	<p>SCALE: 3/8" = 1'-0"</p>	