



STATE OF UTAH - DEPARTMENT OF ADMINISTRATIVE SERVICES

Division of Facilities Construction and Management

DFCM

STANDARD LOW BID PROJECT – INVITATIONAL

September 28, 2006

CUCF BOILER CONTROLS DEPARTMENT OF CORRECTIONS

GUNNISON, UTAH

DFCM Project Number 06168110

WHW Engineering, Inc.
1354 East 3300 South, Suite 200
Salt Lake City, Utah 84106
(801) 466-4021

TABLE OF CONTENTS

	<u>Page Numbers</u>
Title Page	1
Table of Contents	2
Invitation to Bid	3
Project Description	4
Project Schedule	5
Bid Form	6
Instructions to Bidders	8
Bid Bond	12
Contractors Sublist Form	13
Fugitive Dust Plan	16
Contractor's Agreement	23
Performance Bond	28
Payment Bond	29
Change Order Form	30
Certificate of Substantial Completion	31

Current copies of the following documents are hereby made part of these contract documents by reference. These documents are available on the DFCM web site at <http://dfcm.utah.gov> or are available upon request from DFCM.

DFCM General Conditions dated May 25, 2005.

DFCM Application and Certification for Payment dated May 25, 2005.

Technical Specifications :

Drawings:

INVITATION TO BID

Only firms that have been invited to submit bids on this project are allowed to bid on this project.

Sealed bids will be received by the Division of Facilities Construction and Management (DFCM) for:

CUCF BOILER CONTROLS
DEPARTMENT OF CORRECTIONS, GUNNISON, UTAH
DFCM PROJECT NO: 06168110

<u>Company</u>	<u>Contact</u>	<u>Fax</u>
Serv Co. Industrial Equipment	Gilbert Martinez	(801) 486-4399
MHI Service	Randy Hooverf	(801) 973-4049
Mechanical Service & Systems	Randy Karren	(801) 561-4673

Bids will be in accordance with the Contract Documents that will be available on Thursday September 28, 2006, and distributed in electronic format only on CDs from DFCM, 4110 State Office Building, SLC, Utah and on the DFCM web page at <http://dfcm.utah.gov>. For questions regarding this project, please contact Craig Wessman, DFCM, at 801 538-3246. No others are to be contacted regarding this bidding process. The construction budget for this project is \$72,500.00.

A **mandatory** pre-bid meeting will be held at Central Utah Correctional Facility, Gunnison , Utah on Thursday, October 5, 2006 at 10:00 AM. All bidders wishing to bid on this project are required to attend this meeting.

Bids will be received until the hour of 3:00 PM on Thursday, October 12, 2006 at DFCM, 4110 State Office Building, Salt Lake City, Utah 84114. Bids will be opened and read aloud in the DFCM Conference Room, 4110 State Office Building, Salt Lake City, Utah. NOTE: Bids must be received at 4110 State Office Building by the specified time.

Bid security, in the amount of five percent (5%) of the bid, must be submitted as stated in the Instruction to Bidders.

The Division of Facilities Construction and Management reserves the right to reject any or all bids or to waive any formality or technicality in any bid in the interest of DFCM.

DIVISION OF FACILITIES CONSTRUCTION AND MANAGEMENT
Joanna Fisher, Contract Coordinator
4110 State Office Building, Salt Lake City, Utah 84114

PROJECT DESCRIPTION

This project is to replace the existing boiler control system on two existing boilers located at the Central Utah Correctional Facility in Gunnison, Utah. The system is to be an electronic micro modulation control system with new modulating gas valves to. Exhaust gas analysis will also be provided and incorporated into the control system. For exact details of the control system, refer to the technical specification for the project. The existing boilers are Cleaver Brooks boilers. The boilers burn natural gas/no. 2 oil and generate 100 psig steam for the entire facility.

The boiler plant is located outside of the security fence surrounding the housing units for the prisoners. Persons entering this facility to perform the work will be required to pass a security clearance to work on the site. A security clearance will not be required for the non-mandatory pre-bid site visit. It is anticipated that there will be no need for the contractor to enter the secured fenced area. Entering the site is through the main guard station and gate to the campus. Persons should have a current valid drivers license to enter the site for the site visit.

**PROJECT SCHEDULE**

PROJECT NAME: CUCF Boiler Controls, Department of Corrections, Gunnison, Utah				
DFCM PROJECT NO. 06168110				
Event	Day	Date	Time	Place
Bidding Documents Available	Thursday	September 28, 2006	12:00 PM	DFCM, 4110 State Office Bldg, SLC, UT or DFCM web site *
Mandatory Pre-bid Site Meeting	Thursday	October 5, 2006	10:30 AM	Heating Plant at CUCF Gunnison, Utah
Last Day to Submit Questions	Friday	October 6, 2006	4:00 PM	DFCM, Send to Craig Wessman, fax no. 801 538-3874 or e-mail to cwessman@utah.gov
Final Addendum Issued	Tuesday	October 10, 2006	4:00 PM	DFCM web site *
Prime Contractors Turn In Bid and Bid Bond / Bid Opening in DFCM Conference Room	Thursday	October 12, 2006	3:00 PM	DFCM, 4110 State Office Bldg, SLC, UT
Sub-contractor List Due	Friday	October 13, 2006	3:00 PM	DFCM, 4110 State Office Bldg, SLC, UT
<i>Project Completion</i>	75 Days	After NTP		

* DFCM's web site address is <http://dfcm.utah.gov>



BID FORM

NAME OF BIDDER _____ DATE _____

To the Division of Facilities Construction and Management
4110 State Office Building
Salt Lake City, Utah 84114

The undersigned, responsive to the "Notice to Contractors" and in accordance with the "Instructions to Bidders", in compliance with your invitation for bids for the CUCF Boiler Controls, Department of Corrections, Gunnison, Utah and having examined the Contract Documents and the site of the proposed Work and being familiar with all of the conditions surrounding the construction of the proposed Project, including the availability of labor, hereby proposes to furnish all labor, materials and supplies as required for the Work in accordance with the Contract Documents as specified and within the time set forth and at the price stated below. This price is to cover all expenses incurred in performing the Work required under the Contract Documents of which this bid is a part:

I/We acknowledge receipt of the following Addenda: _____

For all work shown on the Drawings and described in the Specifications and Contract Documents, I/we agree to perform for the sum of:

_____ DOLLARS (\$ _____)
(In case of discrepancy, written amount shall govern)

I/We guarantee that the Work will be Substantially Complete within 75 calendar days after receipt of the Notice to Proceed, should I/we be the successful bidder, and agree to pay liquidated damages in the amount of **\$75.00** per day for each day after expiration of the Contract Time as stated in Article 3 of the Contractor's Agreement.

This bid shall be good for 45 days after bid opening.

Enclosed is a 5% bid bond, as required, in the sum of _____

The undersigned Contractor's License Number for Utah is _____.

Upon receipt of notice of award of this bid, the undersigned agrees to execute the contract within ten (10) days, unless a shorter time is specified in the Contract Documents, and deliver acceptable Performance and Payment bonds in the prescribed form in the amount of 100% of the Contract Sum for faithful performance of the contract.

The Bid Bond attached, in the amount not less than five percent (5%) of the above bid sum, shall become the property of the Division of Facilities Construction and Management as liquidated damages for delay and additional expense caused thereby in the event that the contract is not executed and/or acceptable 100% Performance and Payment bonds are not delivered within the time set forth.

Type of Organization:

(Corporation, Partnership, Individual, etc.)

Any request and information related to Utah Preference Laws:

Respectfully submitted,

Name of Bidder

ADDRESS:

Authorized Signature

INSTRUCTIONS TO BIDDERS

1. Drawings and Specifications, Other Contract Documents

Drawings and Specifications, as well as other available Contract Documents, may be obtained as stated in the Invitation to Bid.

2. Bids

Before submitting a bid, each contractor shall carefully examine the Contract Documents, shall visit the site of the Work; shall fully inform themselves as to all existing conditions and limitations; and shall include in the bid the cost of all items required by the Contract Documents. If the bidder observes that portions of the Contract Documents are at variance with applicable laws, building codes, rules, regulations or contain obvious erroneous or uncoordinated information, the bidder shall promptly notify the DFCM Representative and the necessary changes shall be accomplished by Addendum.

The bid, bearing original signatures, must be typed or handwritten in ink on the Bid Form provided in the procurement documents and submitted in a sealed envelope at the location specified by the Invitation to Bid prior to the deadline for submission of bids.

Bid bond security, in the amount of five percent (5%) of the bid, made payable to the Division of Facilities Construction and Management, shall accompany bid. **THE BID BOND MUST BE ON THE BID BOND FORM PROVIDED IN THE PROCUREMENT DOCUMENTS IN ORDER TO BE CONSIDERED AN ACCEPTABLE BID.**

If the bid bond security is submitted on a bid bond form other than DFCM's required bid bond form, and the bid security meets all other legal requirements, the bidder will be allowed to provide an acceptable bid bond by the close of business on the next business day following notification by DFCM of submission of a defective bid bond security. NOTE: A cashier's check cannot be used as a substitute for a bid bond.

3. Contract and Bond

The Contractor's Agreement will be in the form bound in the specifications. The Contract Time will be as indicated in the bid. The successful bidder, simultaneously with the execution of the Contract Agreement, will be required to furnish a performance bond and a payment bond, both bearing original signatures, upon the forms provided in the procurement documents. The performance and payment bonds shall be for an amount equal to one hundred percent (100%) of the contract sum and secured from a company that meets the requirements specified in the requisite forms. Any bonding requirements for subcontractors will be specified in the Supplementary General Conditions.

4. Listing of Subcontractors

Listing of Subcontractors shall be as summarized in the “Instructions and Subcontractor’s List Form”, which are included as part of these Contract Documents. The Subcontractors List shall be delivered to DFCM or faxed to DFCM at (801)538-3677 within 24 hours of the bid opening. Requirements for listing additional subcontractors will be listed in the Contract Documents.

DFCM retains the right to audit or take other steps necessary to confirm compliance with requirements for the listing and changing of subcontractors. Any contractor who is found to not be in compliance with these requirements is subject to a debarment hearing and may be debarred from consideration for award of contracts for a period of up to three years.

5. Interpretation of Drawings and Specifications

If any person or entity contemplating submitting a bid is in doubt as to the meaning of any part of the drawings, specifications or other Contract Documents, such person shall submit to the DFCM Project Manager a request for an interpretation thereof. The person or entity submitting the request will be responsible for its prompt delivery. Any interpretation of the proposed documents will be made only by addenda posted on DFCM’s web site at <http://dfcm.utah.gov>. Neither the DFCM nor A/E will be responsible for any other explanations or interpretations of the proposed documents. A/E shall be deemed to refer to the architect or engineer hired by DFCM as the A/E or Consultant for the Project.

6. Addenda

Addenda will be posted on DFCM’s web site at <http://dfcm.utah.gov>. Contractors are responsible for obtaining information contained in each addendum from the web site. Addenda issued prior to the submittal deadline shall become part of the bidding process and must be acknowledged on the bid form. Failure to acknowledge addenda may result in disqualification from bidding.

7. Award of Contract

The Contract will be awarded as soon as possible to the lowest, responsive and responsible bidder, based on the lowest combination of base bid and acceptable prioritized alternates, provided the bid is reasonable, is in the interests of the State of Utah to accept and after applying the Utah Preference Laws in U.C.A. Title 63, Chapter 56. DFCM reserves the right to waive any technicalities or formalities in any bid or in the bidding. Alternates will be accepted on a prioritized basis with Alternate 1 being highest priority, Alternate 2 having second priority, etc.

8. DFCM Contractor Performance Rating

As a contractor completes each DFCM project, DFCM, the architect/engineer and the using agency will evaluate project performance based on the enclosed “DFCM Contractor Performance Rating” form. The ratings issued on this project will not affect this project but may affect the award on future projects.

9. Licensure

The Contractor shall comply with and require all of its subcontractors to comply with the license laws as required by the State of Utah.

10. Right to Reject Bids

DFCM reserves the right to reject any or all Bids.

11. Time is of the Essence

Time is of the essence in regard to all the requirements of the Contract Documents.

12. Withdrawal of Bids

Bids may be withdrawn on written request received from bidder prior to the time fixed for opening. Negligence on the part of the bidder in preparing the bid confers no right for the withdrawal of the bid after it has been opened.

13. Product Approvals

Where reference is made to one or more proprietary products in the Contract Documents, but restrictive descriptive materials of one or more manufacturer(s) is referred to in the Contract Documents, the products of other manufacturers will be accepted, provided they equal or exceed the standards set forth in the drawings and specifications and are compatible with the intent and purpose of the design, subject to the written approval of the A/E. Such written approval must occur prior to the deadline established for the last scheduled addenda to be issued. The A/E’s written approval will be in an issued addendum. If the descriptive material is not restrictive, the products of other manufacturers specified will be accepted without prior approval provided they are compatible with the intent and purpose of the design as determined by the A/E.

14. Financial Responsibility of Contractors, Subcontractors and Sub-subcontractors

Contractors shall respond promptly to any inquiry in writing by DFCM to any concern of financial responsibility of the contractor, subcontractor or sub-subcontractor.

15. Debarment

By submitting a bid, the Contractor certifies that neither it nor its principals, including project and site managers, have been, or are under consideration for, debarment or suspension, or any action that would exclude such from participation in a construction contract by any governmental department or agency. If the Contractor cannot certify this statement, attach to the bid a detailed written explanation which must be reviewed and approved by DFCM as part of the requirements for award of the Project.

BID BOND

(Title 63, Chapter 56, U. C. A. 1953, as Amended)

KNOW ALL PERSONS BY THESE PRESENTS:

That _____ hereinafter referred to as the "Principal," and _____, a corporation organized and existing under the laws of the State of _____, with its principal office in the City of _____ and authorized to transact business in this State and U. S. Department of the Treasury Listed, (Circular 570, Companies Holding Certificates of Authority as Acceptable Securities on Federal Bonds and as Acceptable Reinsuring Companies); hereinafter referred to as the "Surety," are held and firmly bound unto the STATE OF UTAH, hereinafter referred to as the "Obligee," in the amount of \$ _____ (5% of the accompanying bid), being the sum of this Bond to which payment the Principal and Surety bind themselves, their heirs, executors, administrators, successors and assigns, jointly and severally, firmly by these presents.

THE CONDITION OF THIS OBLIGATION IS SUCH that whereas the Principal has submitted to Obligee the accompanying bid incorporated by reference herein, dated as shown, to enter into a contract in writing for the _____ Project.

NOW, THEREFORE, THE CONDITION OF THE ABOVE OBLIGATION IS SUCH, that if the said principal does not execute a contract and give bond to be approved by the Obligee for the faithful performance thereof within ten (10) days after being notified in writing of such contract to the principal, then the sum of the amount stated above will be forfeited to the State of Utah as liquidated damages and not as a penalty; if the said principal shall execute a contract and give bond to be approved by the Obligee for the faithful performance thereof within ten (10) days after being notified in writing of such contract to the Principal, then this obligation shall be null and void. It is expressly understood and agreed that the liability of the Surety for any and all defaults of the Principal hereunder shall be the full penal sum of this Bond. The Surety, for value received, hereby stipulates and agrees that obligations of the Surety under this Bond shall be for a term of sixty (60) days from actual date of the bid opening.

PROVIDED, HOWEVER, that this Bond is executed pursuant to provisions of Title 63, Chapter 56, Utah Code Annotated, 1953, as amended, and all liabilities on this Bond shall be determined in accordance with said provisions to same extent as if it were copied at length herein.

IN WITNESS WHEREOF, the above bounden parties have executed this instrument under their several seals on the date indicated below, the name and corporate seal of each corporate party being hereto affixed and these presents duly signed by its undersigned representative, pursuant to authority of its governing body.

DATED this _____ day of _____, 20_____.

Principal's name and address (if other than a corporation):

By: _____

Title: _____

Principal's name and address (if a corporation):

By: _____

Title: _____
(Affix Corporate Seal)

Surety's name and address:

By: _____
Attorney-in-Fact (Affix Corporate Seal)

STATE OF _____)
COUNTY OF _____) ss.

On this ___ day of _____, 20_____, personally appeared before me _____, whose identity is personally known to me or proved to me on the basis of satisfactory evidence, and who, being by me duly sworn, did say that he/she is the Attorney-in-fact of the above-named Surety Company, and that he/she is duly authorized to execute the same and has complied in all respects with the laws of Utah in reference to becoming sole surety upon bonds, undertakings and obligations, and that he/she acknowledged to me that as Attorney-in-fact executed the same.

Subscribed and sworn to before me this _____ day of _____, 20_____.
My Commission Expires: _____
Resides at: _____

NOTARY PUBLIC

Agency: _____
Agent: _____
Address: _____
Phone: _____

Approved As To Form: May 25, 2005
By Alan S. Bachman, Asst Attorney General

**Division of Facilities Construction and****INSTRUCTIONS AND SUBCONTRACTORS LIST FORM**

The three low bidders, as well as all other bidders that desire to be considered, are required by law to submit to DFCM within 24 hours of bid opening a list of **ALL** first-tier subcontractors, including the subcontractor's name, bid amount and other information required by Building Board Rule and as stated in these Contract Documents, on the following basis:

PROJECTS UNDER \$500,000 - ALL SUBS \$20,000 OR OVER MUST BE LISTED
PROJECTS \$500,000 OR MORE - ALL SUBS \$35,000 OR OVER MUST BE LISTED

- Any additional subcontractors identified in the bid documents shall also be listed.
- The DFCM Director may not consider any bid submitted by a bidder if the bidder fails to submit a subcontractor list meeting the requirements of State law.
- List subcontractors for base bid as well as the impact on the list that the selection of any alternate may have.
- Bidder may not list more than one subcontractor to perform the same work.
- Bidder must list "Self" if performing work itself.

LICENSURE:

The subcontractor's name, the type of work, the subcontractor's bid amount, and the subcontractor's license number as issued by DOPL, if such license is required under Utah Law, shall be listed. Bidder shall certify that all subcontractors, required to be licensed, are licensed as required by State law. A subcontractor includes a trade contractor or specialty contractor and does not include suppliers who provide only materials, equipment, or supplies to a contractor or subcontractor.

BIDDER LISTING 'SELF' AS PERFORMING THE WORK:

Any bidder that is properly licensed for the particular work and intends to perform that work itself in lieu of a subcontractor that would otherwise be required to be on the subcontractor list, must insert the term 'Self' for that category on the subcontractor list form. Any listing of 'Self' on the sublist form shall also include the amount allocated for that work.

'SPECIAL EXCEPTION':

A bidder may list 'Special Exception' in place of a subcontractor when the bidder intends to obtain a subcontractor to perform the work at a later date because the bidder was unable to obtain a qualified or reasonable bid under the provisions of U.C.A. Section 63A-5-208(4). The bidder shall insert the term 'Special Exception' for that category of work, and shall provide documentation with the subcontractor list describing the bidder's efforts to obtain a bid of a qualified subcontractor at a reasonable cost and why the bidder was unable to obtain a qualified subcontractor bid. The Director must find that the bidder complied in good faith with State law requirements for any 'Special Exception' designation, in order for the bid to be considered. If awarded the contract, the Director shall supervise the bidder's efforts to obtain a qualified subcontractor bid. The amount of the awarded contract may not be adjusted to reflect the actual amount of the subcontractor's bid. Any listing of 'Special Exception' on the sublist form shall also include amount allocated for that work.

INSTRUCTIONS AND SUBCONTRACTORS LIST FORM
Page No. 2

GROUND FOR DISQUALIFICATION:

The Director may not consider any bid submitted by a bidder if the bidder fails to submit a subcontractor list meeting the requirements of State law. Director may withhold awarding the contract to a particular bidder if one or more of the proposed subcontractors are considered by the Director to be unqualified to do the Work or for such other reason in the best interest of the State of Utah. Notwithstanding any other provision in these instructions, if there is a good faith error on the sublist form, at the sole discretion of the Director, the Director may provide notice to the contractor and the contractor shall have 24 hours to submit the correction to the Director. If such correction is submitted timely, then the sublist requirements shall be considered met.

CHANGES OF SUBCONTRACTORS SPECIFICALLY IDENTIFIED ON SUBLIST FORM:

Subsequent to twenty-four hours after the bid opening, the contractor may change its listed subcontractors only after receiving written permission from the Director based on complying with all of the following criteria.

- (1) The contractor has established in writing that the change is in the best interest of the State and that the contractor establishes an appropriate reason for the change, which may include, but not is not limited to, the following reasons: the original subcontractor has failed to perform, or is not qualified or capable of performing, and/or the subcontractor has requested in writing to be released.
- (2) The circumstances related to the request for the change do not indicate any bad faith in the original listing of the subcontractors.
- (3) Any requirement set forth by the Director to ensure that the process used to select a new subcontractor does not give rise to bid shopping.
- (4) Any increase in the cost of the subject subcontractor work is borne by the contractor.
- (5) Any decrease in the cost of the subject subcontractor work shall result in a deductive change order being issued for the contract for such decreased amount.
- (6) The Director will give substantial weight to whether the subcontractor has consented in writing to being removed unless the Contractor establishes that the subcontractor is not qualified for the work.

EXAMPLE:

Example of a list where there are only four subcontractors:

TYPE OF WORK	SUBCONTRACTOR, "SELF" OR "SPECIAL EXCEPTION"	SUBCONTRACTOR BID AMOUNT	CONT. LICENSE #
ELECTRICAL	ABCD Electric Inc.	\$350,000.00	123456789000
LANDSCAPING	"Self"	300,000.00	123456789000
CONCRETE (ALTERNATE #1)	XYZ Concrete Inc	298,000.00	987654321000
MECHANICAL	"Special Exception" (attach documentation)	Fixed at: 350,000.00	(TO BE PROVIDED AFTER OBTAINING SUBCONTRACTOR)

PURSUANT TO STATE LAW - SUBCONTRACTOR BID AMOUNTS CONTAINED IN THIS SUBCONTRACTOR LIST SHALL NOT BE DISCLOSED UNTIL THE CONTRACT HAS BEEN AWARDED.



SUBCONTRACTORS LIST
FAX TO 801-538-3677

PROJECT TITLE: _____

Caution: You must read and comply fully with instructions.

Table with 4 columns: TYPE OF WORK, SUBCONTRACTOR, "SELF" OR "SPECIAL EXCEPTION", SUBCONTRACTOR BID AMOUNT, CONT. LICENSE #

We certify that:

- 1. This list includes all subcontractors as required by the instructions, including those related to the base bid as well as any alternates.
2. We have listed "Self" or "Special Exception" in accordance with the instructions.
3. All subcontractors are appropriately licensed as required by State law.

FIRM: _____

DATE: _____

SIGNED BY: _____

NOTICE: FAILURE TO SUBMIT THIS FORM, PROPERLY COMPLETED AND SIGNED, AS REQUIRED IN THESE CONTRACT DOCUMENTS, SHALL BE GROUNDS FOR DFCMS REFUSAL TO ENTER INTO A WRITTEN CONTRACT WITH BIDDER. ACTION MAY BE TAKEN AGAINST BIDDERS BID BOND AS DEEMED APPROPRIATE BY DFCM. ATTACH A SECOND PAGE IF NECESSARY.

FUGITIVE DUST PLAN

The Contractor will fill out the form and file the original with the Division of Air Quality and a copy of the form with the Division of Facilities Construction & Management, prior to the issuance of any notice to proceed.

The Contractor will be fully responsible for compliance with the Fugitive Dust Control Plan, including the adequacy of the plan, any damages, fines, liability, and penalty or other action that results from noncompliance.

Utah Division of Air Quality

April 20, 1999

**GUIDANCE THAT MUST BE CONSIDERED IN DEVELOPING AND SUBMITTING A
DUST CONTROL PLAN FOR COMPLIANCE WITH R307-309-3, 4, 5, 6, 7**

Source Information:

1. Name of your operation (source): provide a name if the source is a construction site.
2. Address or location of your operation or construction site.
3. UTM coordinates or Longitude/Latitude of stationary emission points at your operation.
4. Lengths of the project, if temporary (time period).
5. Description of process (include all sources of dust and fugitive dust). Please, if necessary, use additional sheets of paper for this description. Be sure to mark it as an attachment.
6. Type of material processed or disturbed.
7. Amount of material processed (tons per year, tons per month, lbs./hr., and applicable units).

8. Destination of product (where will the material produced be used or transported, be specific, provide address or specific location), information needed for temporary relocation applicants.

9. Identify the individual who is responsible for the implementation and maintenance of fugitive dust control measures. List name(s), position(s) and telephone number(s).

10. List, and attach copies of any contract lease, liability agreement with other companies that may, or will, be responsible for dust control on site or on the project.

Description of Fugitive Dust Emission Activities
(Things to consider in addressing fugitive dust control strategies.)

1. Type of activities (drilling and blasting, road construction, development construction, earth moving and excavation, handling and hauling materials, cleaning and leveling, etc).
2. List type of equipment generating the fugitive dust.
3. Diagram the location of each activity or piece of equipment on site. Please attach the diagram.
4. Provide pictures or drawings of each activity. Include a drawing of the unpaved/paved road network used to move loads “on” and “off” property.
5. Vehicle miles travels on unpaved roads associated with the activity (average speed).
6. Type of dust emitted at each source (coal, cement, sand, soil, clay, dust, etc.)
7. Estimate the size of the release area at which the activity occurs (square miles). For haul or dirt roads include total miles of road in use during the activity.

Description of Fugitive Dust Emission Controls on Site

Control strategies must be designed to meet 20% opacity or less on site (a lesser opacity may be defined by Approval Order conditions or federal requirements such as NSPS), and control strategies must prevent exceeding 10% opacity from fugitive dust at the property boundary (site boundary) for compliance with R307-309-3.

1. Types of ongoing emission controls proposed for each activity, each piece of equipment, and haul roads.
2. Types of additional dust controls proposed for bare, exposed surfaces (chemical stabilization, synthetic cover, wind breaks, vegetative cover, etc).
3. Method of application of dust suppressant.
4. Frequency of application of dust suppressant.
5. Explain what triggers the use of a special control measure other than routine measures already in place, such as covered loads or measures covered by a permit condition (increase in opacity, high winds, citizen complaints, dry conditions, etc).
6. Explain in detail what control strategies/measures will be implemented off-hours, i.e., Saturdays/Sundays/Holidays, as well as 6 PM to 6 AM each day.

Fugitive Dust Control Plan Violation Report

When a source is found in violation of R307-309-3 or in violation of the Fugitive Dust Control Plan, the course must submit a report to the Executive Secretary within 15 days after receiving a Notice of Violation. The report must include the following information:

1. Name and address of dust source.
2. Time and duration of dust episode.
3. Meteorological conditions during the dust episode.
4. Total number and type of fugitive dust activities and dust producing equipment within each operation boundary. If no change has occurred from the existing dust control plan, the source should state that the activity/equipment is the same.
5. Fugitive dust activities or dust producing equipment that caused a violation of R-307-309-3 or the sources dust control plan.
6. Reasons for failing to control dust from the dust generating activity or equipment.
7. New and/or additional fugitive dust control strategies necessary to achieve compliance with R307-309-3, 4, 5, 6, or 7.
8. If it can not be demonstrated that the current approved Dust Control Plan can result in compliance with R307-309-3 through 7, the Dust Control Plan must be revised so as to demonstrate compliance with 307-309-3 through 7. Within 30 days of receiving a fugitive dust Notice of Violation, the source must submit the revised Plan to the Executive Secretary for review and approval.

Submit the Dust Control Plan to:

Executive Secretary	Phone: (801) 536-4000
Utah Air Quality Board	FAX: (801) 536-4099
POB 144820	
15 North 1950 West	
Salt Lake City, Utah 84114-4820	

Attachments: DFCM Form FDR R-307-309, Rule 307-309

CONTRACTOR'S AGREEMENT

FOR:

THIS CONTRACTOR'S AGREEMENT, made and entered into this ____ day of _____, 20__, by and between the DIVISION OF FACILITIES CONSTRUCTION AND MANAGEMENT, hereinafter referred to as "DFCM", and _____, incorporated in the State of _____ and authorized to do business in the State of Utah, hereinafter referred to as "Contractor", whose address is _____.

WITNESSETH: WHEREAS, DFCM intends to have Work performed at _____.

WHEREAS, Contractor agrees to perform the Work for the sum stated herein.

NOW, THEREFORE, DFCM and Contractor for the consideration provided in this Contractor's Agreement, agree as follows:

ARTICLE 1. SCOPE OF WORK. The Work to be performed shall be in accordance with the Contract Documents prepared by _____ and entitled "_____"

The DFCM General Conditions ("General Conditions") dated May 25, 2005 on file at the office of DFCM and available on the DFCM website, are hereby incorporated by reference as part of this Agreement and are included in the specifications for this Project. All terms used in this Contractor's Agreement shall be as defined in the Contract Documents, and in particular, the General Conditions.

The Contractor Agrees to furnish labor, materials and equipment to complete the Work as required in the Contract Documents which are hereby incorporated by reference. It is understood and agreed by the parties hereto that all Work shall be performed as required in the Contract Documents and shall be subject to inspection and approval of DFCM or its authorized representative. The relationship of the Contractor to the DFCM hereunder is that of an independent Contractor.

ARTICLE 2. CONTRACT SUM. The DFCM agrees to pay and the Contractor agrees to accept in full performance of this Contractor's Agreement, the sum of _____ DOLLARS AND NO CENTS (\$_____.00), which is the base bid, and which sum also includes the cost of a 100% Performance Bond and a 100%

Payment Bond as well as all insurance requirements of the Contractor. Said bonds have already been posted by the Contractor pursuant to State law. The required proof of insurance certificates have been delivered to DFCM in accordance with the General Conditions before the execution of this Contractor's Agreement.

ARTICLE 3. TIME OF COMPLETION AND DELAY REMEDY. The Work shall be Substantially Complete within _____ (___) calendar days after the date of the Notice to Proceed. Contractor agrees to pay liquidated damages in the amount of \$_____ per day for each day after expiration of the Contract Time until the Contractor achieves Substantial Completion in accordance with the Contract Documents, if Contractor's delay makes the damages applicable. The provision for liquidated damages is: (a) to compensate the DFCM for delay only; (b) is provided for herein because actual damages can not be readily ascertained at the time of execution of this Contractor's Agreement; (c) is not a penalty; and (d) shall not prevent the DFCM from maintaining Claims for other non-delay damages, such as costs to complete or remedy defective Work.

No action shall be maintained by the Contractor, including its or Subcontractor or suppliers at any tier, against the DFCM or State of Utah for damages or other claims due to losses attributable to hindrances or delays from any cause whatsoever, including acts and omissions of the DFCM or its officers, employees or agents, except as expressly provided in the General Conditions. The Contractor may receive a written extension of time, signed by the DFCM, in which to complete the Work under this Contractor's Agreement in accordance with the General Conditions.

ARTICLE 4. CONTRACT DOCUMENTS. The Contract Documents consist of this Contractor's Agreement, the Conditions of the Contract (DFCM General Conditions, Supplementary and other Conditions), the Drawings, Specifications, Addenda and Modifications. The Contract Documents shall also include the bidding documents, including the Invitation to Bid, Instructions to Bidders/ Proposers and the Bid/Proposal, to the extent not in conflict therewith and other documents and oral presentations that are documented as an attachment to the contract.

All such documents are hereby incorporated by reference herein. Any reference in this Contractor's Agreement to certain provisions of the Contract Documents shall in no way be construed as to lessen the importance or applicability of any other provisions of the Contract Documents.

ARTICLE 5. PAYMENT. The DFCM agrees to pay the Contractor from time to time as the Work progresses, but not more than once each month after the date of Notice to Proceed, and only upon Certificate of the A/E for Work performed during the preceding calendar month, ninety-five percent (95%) of the value of the labor performed and ninety-five percent (95%) of the value of materials furnished in place or on the site. The Contractor agrees to furnish to the DFCM invoices for materials purchased and on the site but not installed, for which the Contractor requests payment and agrees to

safeguard and protect such equipment or materials and is responsible for safekeeping thereof and if such be stolen, lost or destroyed, to replace same.

Such evidence of labor performed and materials furnished as the DFCM may reasonably require shall be supplied by the Contractor at the time of request for Certificate of Payment on account. Materials for which payment has been made cannot be removed from the job site without DFCM's written approval. Five percent (5%) of the earned amount shall be retained from each monthly payment. The retainage, including any additional retainage imposed and the release of any retainage, shall be in accordance with UCA 13-8-5 as amended. Contractor shall also comply with the requirements of UCA 13-8-5, including restrictions of retainage regarding subcontractors and the distribution of interest earned on the retention proceeds. The DFCM shall not be responsible for enforcing the Contractor's obligations under State law in fulfilling the retention law requirements with subcontractors at any tier.

ARTICLE 6. INDEBTEDNESS. Before final payment is made, the Contractor must submit evidence satisfactory to the DFCM that all payrolls, materials bills, subcontracts at any tier and outstanding indebtedness in connection with the Work have been properly paid. Final Payment will be made after receipt of said evidence, final acceptance of the Work by the DFCM as well as compliance with the applicable provisions of the General Conditions.

Contractor shall respond immediately to any inquiry in writing by DFCM as to any concern of financial responsibility and DFCM reserves the right to request any waivers, releases or bonds from Contractor in regard to any rights of Subcontractors (including suppliers) at any tier or any third parties prior to any payment by DFCM to Contractor.

ARTICLE 7. ADDITIONAL WORK. It is understood and agreed by the parties hereto that no money will be paid to the Contractor for additional labor or materials furnished unless a new contract in writing or a Modification hereof in accordance with the General Conditions and the Contract Documents for such additional labor or materials has been executed. The DFCM specifically reserves the right to modify or amend this Contractor's Agreement and the total sum due hereunder either by enlarging or restricting the scope of the Work.

ARTICLE 8. INSPECTIONS. The Work shall be inspected for acceptance in accordance with the General Conditions.

ARTICLE 9. DISPUTES. Any dispute, PRE or Claim between the parties shall be subject to the provisions of Article 7 of the General Conditions. DFCM reserves all rights to pursue its rights and remedies as provided in the General Conditions.

ARTICLE 10. TERMINATION, SUSPENSION OR ABANDONMENT. This Contractor's Agreement may be terminated, suspended or abandoned in accordance with the General Conditions.

ARTICLE 11. DFCM'S RIGHT TO WITHHOLD CERTAIN AMOUNT AND MAKE USE THEREOF. The DFCM may withhold from payment to the Contractor such amount as, in DFCM's judgment, may be necessary to pay just claims against the Contractor or Subcontractor at any tier for labor and services rendered and materials furnished in and about the Work. The DFCM may apply such withheld amounts for the payment of such claims in DFCM's discretion. In so doing, the DFCM shall be deemed the agent of Contractor and payment so made by the DFCM shall be considered as payment made under this Contractor's Agreement by the DFCM to the Contractor. DFCM shall not be liable to the Contractor for any such payment made in good faith. Such withholdings and payments may be made without prior approval of the Contractor and may be also be prior to any determination as a result of any dispute, PRE, Claim or litigation.

ARTICLE 12. INDEMNIFICATION. The Contractor shall comply with the indemnification provisions of the General Conditions.

ARTICLE 13. SUCCESSORS AND ASSIGNMENT OF CONTRACT. The DFCM and Contractor, respectively bind themselves, their partners, successors, assigns and legal representatives to the other party to this Agreement, and to partners, successors, assigns and legal representatives of such other party with respect to all covenants, provisions, rights and responsibilities of this Contractor's Agreement. The Contractor shall not assign this Contractor's Agreement without the prior written consent of the DFCM, nor shall the Contractor assign any moneys due or to become due as well as any rights under this Contractor's Agreement, without prior written consent of the DFCM.

ARTICLE 14. RELATIONSHIP OF THE PARTIES. The Contractor accepts the relationship of trust and confidence established by this Contractor's Agreement and covenants with the DFCM to cooperate with the DFCM and A/E and use the Contractor's best skill, efforts and judgment in furthering the interest of the DFCM; to furnish efficient business administration and supervision; to make best efforts to furnish at all times an adequate supply of workers and materials; and to perform the Work in the best and most expeditious and economic manner consistent with the interests of the DFCM.

ARTICLE 15. AUTHORITY TO EXECUTE AND PERFORM AGREEMENT. Contractor and DFCM each represent that the execution of this Contractor's Agreement and the performance thereunder is within their respective duly authorized powers.

ARTICLE 16. ATTORNEY FEES AND COSTS. Except as otherwise provided in the dispute resolution provisions of the General Conditions, the prevailing party shall be entitled to reasonable attorney fees and costs incurred in any action in the District Court and/or appellate body to enforce this Contractor's Agreement or recover damages or any other action as a result of a breach thereof.

IN WITNESS WHEREOF, the parties hereto have executed this Contractor's Agreement on the day and year stated hereinabove.

CONTRACTOR: _____

Signature Date

Title: _____

State of _____)
County of _____)

Please type/print name clearly

On this ____ day of _____, 20____, personally appeared before me, _____, whose identity is personally known to me (or proved to me on the basis of satisfactory evidence) and who by me duly sworn (or affirmed), did say that he (she) is the _____ (title or office) of the firm and that said document was signed by him (her) in behalf of said firm.

Notary Public

(SEAL)

My Commission Expires _____

APPROVED AS TO AVAILABILITY
OF FUNDS:

**DIVISION OF FACILITIES
CONSTRUCTION AND MANAGEMENT**

David D. Williams, Jr. Date
DFCM Administrative Services Director

- Manager Date
Capital Development/Improvements

APPROVED AS TO FORM:
ATTORNEY GENERAL
May 25, 2005
By: Alan S. Bachman
Asst Attorney General

APPROVED FOR EXPENDITURE:

Division of Finance Date

PERFORMANCE BOND
(Title 63, Chapter 56, U. C. A. 1953, as Amended)

That _____ hereinafter referred to as the "Principal" and _____, a corporation organized and existing under the laws of the State of _____, with its principal office in the City of _____ and authorized to transact business in this State and U. S. Department of the Treasury Listed (Circular 570, Companies Holding Certificates of Authority as Acceptable Securities on Federal Bonds and as Acceptable Reinsuring Companies); hereinafter referred to as the "Surety," are held and firmly bound unto the State of Utah, hereinafter referred to as the "Obligee," in the amount of _____ DOLLARS (\$ _____) for the payment whereof, the said Principal and Surety bind themselves and their heirs, administrators, executors, successors and assigns, jointly and severally, firmly by these presents.

WHEREAS, the Principal has entered into a certain written Contract with the Obligee, dated the _____ day of _____, 20____, to construct _____ in the County of _____, State of Utah, Project No. _____, for the approximate sum of _____ Dollars (\$ _____), which Contract is hereby incorporated by reference herein.

NOW, THEREFORE, the condition of this obligation is such that if the said Principal shall faithfully perform the Contract in accordance with the Contract Documents including, but not limited to, the Plans, Specifications and conditions thereof, the one year performance warranty, and the terms of the Contract as said Contract may be subject to Modifications or changes, then this obligation shall be void; otherwise it shall remain in full force and effect.

No right of action shall accrue on this bond to or for the use of any person or corporation other than the state named herein or the heirs, executors, administrators or successors of the Owner.

The parties agree that the dispute provisions provided in the Contract Documents apply and shall constitute the sole dispute procedures of the parties.

PROVIDED, HOWEVER, that this Bond is executed pursuant to the Provisions of Title 63, Chapter 56, Utah Code Annotated, 1953, as amended, and all liabilities on this Bond shall be determined in accordance with said provisions to the same extent as if it were copied at length herein.

IN WITNESS WHEREOF, the said Principal and Surety have signed and sealed this instrument this _____ day of _____, 20____.

WITNESS OR ATTESTATION:

PRINCIPAL:

By: _____

(Seal)

Title: _____

WITNESS OR ATTESTATION:

SURETY:

By: _____

Attorney-in-Fact (Seal)

STATE OF _____)
) ss.
COUNTY OF _____)

On this _____ day of _____, 20____, personally appeared before me _____, whose identity is personally known to me or proved to me on the basis of satisfactory evidence, and who, being by me duly sworn, did say that he/she is the Attorney in-fact of the above-named Surety Company and that he/she is duly authorized to execute the same and has complied in all respects with the laws of Utah in reference to becoming sole surety upon bonds, undertakings and obligations, and that he/she acknowledged to me that as Attorney-in-fact executed the same.

Subscribed and sworn to before me this _____ day of _____, 20____.

My commission expires: _____

Resides at: _____

NOTARY PUBLIC

Agency: _____
Agent: _____
Address: _____
Phone: _____

Approved As To Form: May 25, 2005
By Alan S. Bachman, Asst Attorney General

PAYMENT BOND

(Title 63, Chapter 56, U. C. A. 1953, as Amended)

KNOW ALL PERSONS BY THESE PRESENTS:

That _____ hereinafter referred to as the "Principal," and _____, a corporation organized and existing under the laws of the State of _____ authorized to do business in this State and U. S. Department of the Treasury Listed (Circular 570, Companies Holding Certificates of Authority as Acceptable Securities on Federal Bonds and as Acceptable Reinsuring Companies); with its principal office in the City of _____, hereinafter referred to as the "Surety," are held and firmly bound unto the State of Utah hereinafter referred to as the "Obligee," in the amount of _____ Dollars (\$ _____) for the payment whereof, the said Principal and Surety bind themselves and their heirs, administrators, executors, successors and assigns, jointly and severally, firmly by these presents.

WHEREAS, the Principal has entered into a certain written Contract with the Obligee, dated the _____ day of _____, 20____, to construct _____ in the County of _____, State of Utah, Project No. _____ for the approximate sum of _____ Dollars (\$ _____), which contract is hereby incorporated by reference herein.

NOW, THEREFORE, the condition of this obligation is such that if the said Principal shall pay all claimants supplying labor or materials to Principal or Principal's Subcontractors in compliance with the provisions of Title 63, Chapter 56, of Utah Code Annotated, 1953, as amended, and in the prosecution of the Work provided for in said Contract, then, this obligation shall be void; otherwise it shall remain in full force and effect.

That said Surety to this Bond, for value received, hereby stipulates and agrees that no changes, extensions of time, alterations or additions to the terms of the Contract or to the Work to be performed thereunder, or the specifications or drawings accompanying same shall in any way affect its obligation on this Bond, and does hereby waive notice of any such changes, extensions of time, alterations or additions to the terms of the Contract or to the Work or to the specifications or drawings and agrees that they shall become part of the Contract Documents.

PROVIDED, HOWEVER, that this Bond is executed pursuant to the provisions of Title 63, Chapter 56, Utah Code Annotated, 1953, as amended, and all liabilities on this Bond shall be determined in accordance with said provisions to the same extent as if it were copied at length herein.

IN WITNESS WHEREOF, the said Principal and Surety have signed and sealed this instrument this _____ day of _____, 20____.

WITNESS OR ATTESTATION:

PRINCIPAL:

By: _____ (Seal)

Title: _____

WITNESS OR ATTESTATION:

SURETY:

By: _____ Attorney-in-Fact (Seal)

STATE OF _____)
) ss.
COUNTY OF _____)

On this _____ day of _____, 20____, personally appeared before me _____, whose identity is personally known to me or proved to me on the basis of satisfactory evidence, and who, being by me duly sworn, did say that he/she is the Attorney-in-fact of the above-named Surety Company, and that he/she is duly authorized to execute the same and has complied in all respects with the laws of Utah in reference to becoming sole surety upon bonds, undertakings and obligations, and that he/she acknowledged to me that as Attorney-in-fact executed the same.

Subscribed and sworn to before me this _____ day of _____, 20____.

My commission expires: _____

Resides at: _____

NOTARY PUBLIC

Agency: _____
Agent: _____
Address: _____
Phone: _____

Approved As To Form: May 25, 2005
By Alan S. Bachman, Asst Attorney General



CERTIFICATE OF SUBSTANTIAL COMPLETION

PROJECT _____ PROJECT NO: _____
AGENCY/INSTITUTION _____

AREA ACCEPTED _____

The Work performed under the subject Contract has been reviewed on this date and found to be Substantially Completed as defined in the General Conditions; including that the construction is sufficiently completed in accordance with the Contract Documents, as modified by any change orders agreed to by the parties, so that the State of Utah can occupy the Project or specified area of the Project for the use for which it is intended.

The DFCM - (Owner) accepts the Project or specified area of the Project as Substantially Complete and will assume full possession of the Project or specified area of the Project at _____ (time) on _____ (date).

The DFCM accepts the Project for occupancy and agrees to assume full responsibility for maintenance and operation, including utilities and insurance, of the Project subject to the itemized responsibilities and/or exceptions noted below:

The Owner acknowledges receipt of the following closeout and transition materials:

- As-built Drawings O & M Manuals Warranty Documents Completion of Training Requirements

A list of items to be completed or corrected (Punch List) is attached hereto. The failure to include an item on it does not alter the responsibility of the Contractor to complete all the Work in accordance with the Contract Documents, including authorized changes thereof. The amount of _____(Twice the value of the punch list work) shall be retained to assure the completion of the punch list work.

The Contractor shall complete or correct the Work on the list of (Punch List) items appended hereto within _____ calendar days from the above date of issuance of this Certificate. The amount withheld pending completion of the list of items noted and agreed to shall be: \$_____. If the list of items is not completed within the time allotted the Owner has the right to be compensated for the delays and/or complete the work with the help of independent contractor at the expense of the retained project funds. If the retained project funds are insufficient to cover the delay/completion damages, the Owner shall be promptly reimbursed for the balance of the funds needed to compensate the Owner.

by: _____
CONTRACTOR (include name of firm) (Signature) DATE

by: _____
A/E (include name of firm) (Signature) DATE

by: _____
USING INSTITUTION OR AGENCY (Signature) DATE

by: _____
DFCM (Owner) (Signature) DATE

CENTRAL UTAH CORRECTIONAL FACILITY BOILER CONTROLS

DFCM PROJECT # 06168110



State of Utah—Department of Administrative Services

DIVISION OF FACILITIES CONSTRUCTION AND MANAGEMENT

4110 State Office Building / Salt Lake City, Utah 84114 / 538-3018

SPECIFICATIONS

PREPARED BY

WHW ENGINEERING INC.
1354 EAST 3300 SOUTH, SUITE 200
SALT LAKE CITY, UTAH 84106
PHONE: (801) 466-4021
FAX: (801) 466-8536

SEPTEMBER 2006

WHW Engineering Project # 06042

DIVISION 1 - GENERAL REQUIREMENTS

01100 SUMMARY
01770 CLOSEOUT PROCEDURES
01781 PROJECT RECORD DOCUMENTS

DIVISION 15 - MECHANICAL

15010 GENERAL REQUIREMENTS
15050 BASIC MATERIALS & METHODS
15195 FACILITY NATURAL-GAS PIPING
15510 HEATING BOILERS ACCESSORIES

DRAWINGS - 8-1/2" X 11"

ME101 BOILER ROOM PLAN

DIVISION 1
GENERAL REQUIREMENTS

- 01100 SUMMARY
- 01770 CLOSEOUT PROCEDURES
- 01781 PROJECT RECORD DOCUMENTS

SECTION 01100 - SUMMARY

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes the following:
 - 1. Work covered by the Contract Documents.
 - 2. Type of the Contract.
 - 3. Owner's occupancy requirements.
 - 4. Work restrictions.
 - 5. Specification formats and conventions.

1.3 WORK COVERED BY CONTRACT DOCUMENTS

- A. Project Identification: CUCF Boiler Controls.
 - 1. Project Location: Gunnison, UT.
- B. Owner: DFCM.
- C. Architect: WHW Engineering 1354 East 3300 South #200 Salt Lake City, Utah 84106.
- D. The Work consists of the following:
 - 1. The Work includes the replacement of the boiler controls for the two (2) natural gas boilers: B-1 and B-3. In addition to replacing the controllers, this project includes the addition of exhaust gas analyzers, a data terminal interface, and replacing of the gas valves.

1.4 TYPE OF CONTRACT

- A. Project will be constructed under a single prime contract.

1.5 USE OF PREMISES

- A. General: Each Contractor shall have limited use of premises for construction operations as indicated in project documents.

- B. Use of Site: Limit use of premises to areas within the Contract limits indicated. Do not disturb portions of Project site beyond areas in which the Work is indicated.
 - 1. Owner Occupancy: Allow for Owner occupancy of Project site and use by the public.
 - 2. Driveways and Entrances: Keep driveways loading areas, and entrances serving premises clear and available to Owner, Owner's employees, and emergency vehicles at all times. Do not use these areas for parking or storage of materials.
 - a. Schedule deliveries to minimize use of driveways and entrances.
 - b. Schedule deliveries to minimize space and time requirements for storage of materials and equipment on-site.
- C. Use of Existing Building: Maintain existing building in a weathertight condition throughout construction period. Repair damage caused by construction operations. Protect building and its occupants during construction period.

1.6 OWNER'S OCCUPANCY REQUIREMENTS

- A. Full Owner Occupancy: Owner will occupy site and existing building during entire construction period. Cooperate with Owner during construction operations to minimize conflicts and facilitate Owner usage. Perform the Work so as not to interfere with Owner's day-to-day operations. Maintain existing exits, unless otherwise indicated.
 - 1. Maintain access to existing walkways, corridors, and other adjacent occupied or used facilities. Do not close or obstruct walkways, corridors, or other occupied or used facilities without written permission from Owner and authorities having jurisdiction.
 - 2. Provide not less than 72 hours' notice to Owner of activities that will affect Owner's operations.
- B. Partial Owner Occupancy: Owner will occupy the premises during entire construction period, with the exception of areas under construction. Cooperate with Owner during construction operations to minimize conflicts and facilitate Owner usage. Perform the Work so as not to interfere with Owner's operations. Maintain existing exits, unless otherwise indicated.
 - 1. Maintain access to existing walkways, corridors, and other adjacent occupied or used facilities. Do not close or obstruct walkways, corridors, or other occupied or used facilities without written permission from Owner and authorities having jurisdiction.
 - 2. Provide not less than 72 hours' notice to Owner of activities that will affect Owner's operations.
- C. Owner Occupancy of Completed Areas of Construction: Owner reserves the right to occupy and to place and install equipment in completed areas of building, before Substantial Completion, provided such occupancy does not interfere with completion of the Work. Such placement of equipment and partial occupancy shall not constitute acceptance of the total Work.

1. Architect will prepare a Certificate of Substantial Completion for each specific portion of the Work to be occupied before Owner occupancy.
2. Obtain a Certificate of Occupancy from authorities having jurisdiction before Owner occupancy.
3. Before partial Owner occupancy, mechanical and electrical systems shall be fully operational, and required tests and inspections shall be successfully completed. On occupancy, Owner will operate and maintain mechanical and electrical systems serving occupied portions of building.
4. On occupancy, Owner will assume responsibility for maintenance and custodial service for occupied portions of building.

1.7 WORK RESTRICTIONS

- A. On-Site Work Hours: Work shall be generally performed inside the existing building during normal business working hours of 8:00 a.m. to 5:00 p.m., Monday through Friday, except otherwise indicated.
- B. Existing Utility Interruptions: Do not interrupt utilities serving facilities occupied by Owner or others unless permitted under the following conditions and then only after arranging to provide temporary utility services according to requirements indicated:
 1. Notify Owner not less than three days in advance of proposed utility interruptions.
 2. Do not proceed with utility interruptions without Owner's written permission.

1.8 SPECIFICATION FORMATS AND CONVENTIONS

- A. Specification Format: The Specifications are organized into Divisions and Sections using the 16-division format and CSI/CSC's "MasterFormat" numbering system.
 1. Section Identification: The Specifications use Section numbers and titles to help cross-referencing in the Contract Documents. Sections in the Project Manual are in numeric sequence; however, the sequence is incomplete because all available Section numbers are not used. Consult the table of contents at the beginning of the Project Manual to determine numbers and names of Sections in the Contract Documents.
 2. Division 1: Sections in Division 1 govern the execution of the Work of all Sections in the Specifications.
- B. Specification Content: The Specifications use certain conventions for the style of language and the intended meaning of certain terms, words, and phrases when used in particular situations. These conventions are as follows:
 1. Abbreviated Language: Language used in the Specifications and other Contract Documents is abbreviated. Words and meanings shall be interpreted as appropriate. Words implied, but not stated, shall be inferred as the sense requires. Singular words shall be interpreted as plural, and plural words shall be interpreted as singular where applicable as the context of the Contract Documents indicates.

2. Imperative mood and streamlined language are generally used in the Specifications. Requirements expressed in the imperative mood are to be performed by Contractor. Occasionally, the indicative or subjunctive mood may be used in the Section Text for clarity to describe responsibilities that must be fulfilled indirectly by Contractor or by others when so noted.
 - a. The words "shall," "shall be," or "shall comply with," depending on the context, are implied where a colon (:) is used within a sentence or phrase.

1.9 MISCELLANEOUS PROVISIONS

- A. Department of Corrections has specific work requirements including background checks for all employees who will be on site. See general conditions for details of these requirements.

PART 2 - PRODUCTS

(Not Used)

PART 3 - EXECUTION

(Not Used)

END OF SECTION 01100

SECTION 01770 - CLOSEOUT PROCEDURES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes administrative and procedural requirements for contract closeout, including, but not limited to, the following:
 - 1. Inspection procedures.
 - 2. Warranties.
 - 3. Final cleaning.
- B. Related Sections include the following:
 - 1. Division 1 Section "Project Record Documents" for submitting Record Drawings, Record Specifications, and Record Product Data.
 - 2. Divisions 2 through 16 Sections for specific closeout and special cleaning requirements for the Work in those Sections.

1.3 SUBSTANTIAL COMPLETION

- A. Preliminary Procedures: Before requesting inspection for determining date of Substantial Completion, complete the following. List items below that are incomplete in request.
 - 1. Prepare a list of items to be completed and corrected (punch list), the value of items on the list, and reasons why the Work is not complete.
 - 2. Advise Owner of pending insurance changeover requirements.
 - 3. Submit specific warranties, workmanship bonds, maintenance service agreements, final certifications, and similar documents.
 - 4. Obtain and submit releases permitting Owner unrestricted use of the Work and access to services and utilities. Include occupancy permits, operating certificates, and similar releases.
 - 5. Prepare and submit Project Record Documents, operation and maintenance manuals, Final Completion construction photographs, damage or settlement surveys, property surveys, and similar final record information.
 - 6. Deliver tools, spare parts, extra materials, and similar items to location designated by Owner. Label with manufacturer's name and model number where applicable.

7. Make final changeover of permanent locks and deliver keys to Owner. Advise Owner's personnel of changeover in security provisions.
 8. Complete startup testing of systems.
 9. Submit test/adjust/balance records.
 10. Terminate and remove temporary facilities from Project site, along with mockups, construction tools, and similar elements.
 11. Advise Owner of changeover in heat and other utilities.
 12. Submit changeover information related to Owner's occupancy, use, operation, and maintenance.
 13. Complete final cleaning requirements, including touchup painting.
 14. Touch up and otherwise repair and restore marred exposed finishes to eliminate visual defects.
- B. Inspection: Submit a written request for inspection for Substantial Completion. On receipt of request, Architect will either proceed with inspection or notify Contractor of unfulfilled requirements. Architect will prepare the Certificate of Substantial Completion after inspection or will notify Contractor of items, either on Contractor's list or additional items identified by Architect, that must be completed or corrected before certificate will be issued.
1. Reinspection: Request reinspection when the Work identified in previous inspections as incomplete is completed or corrected.
 2. Results of completed inspection will form the basis of requirements for Final Completion.

1.4 FINAL COMPLETION

- A. Preliminary Procedures: Before requesting final inspection for determining date of Final Completion, complete the following:
1. Submit a final Application for Payment according to General Conditions.
 2. Submit certified copy of Architect's Substantial Completion inspection list of items to be completed or corrected (punch list), endorsed and dated by Architect. The certified copy of the list shall state that each item has been completed or otherwise resolved for acceptance.
 3. Instruct Owner's personnel in operation, adjustment, and maintenance of products, equipment, and systems.
- B. Inspection: Submit a written request for final inspection for acceptance. On receipt of request, Architect will either proceed with inspection or notify Contractor of unfulfilled requirements. Architect will prepare a final Certificate for Payment after inspection or will notify Contractor of construction that must be completed or corrected before certificate will be issued.
1. Reinspection: Request reinspection when the Work identified in previous inspections as incomplete is completed or corrected.

1.5 WARRANTIES

- A. Submittal Time: Submit written warranties on request of Architect for designated portions of the Work where commencement of warranties other than date of Substantial Completion is indicated.
- B. Partial Occupancy: Submit properly executed warranties within 15 days of completion of designated portions of the Work that are completed and occupied or used by Owner during construction period by separate agreement with Contractor.
- C. Organize warranty documents into an orderly sequence based on the table of contents of the Project Manual.
 - 1. Bind warranties and bonds in heavy-duty, 3-ring, vinyl-covered, loose-leaf binders, thickness as necessary to accommodate contents, and sized to receive 8-1/2-by-11-inch paper.
 - 2. Provide heavy paper dividers with plastic-covered tabs for each separate warranty. Mark tab to identify the product or installation. Provide a typed description of the product or installation, including the name of the product and the name, address, and telephone number of Installer.
 - 3. Identify each binder on the front and spine with the typed or printed title "WARRANTIES," Project name, and name of Contractor.
- D. Provide additional copies of each warranty to include in operation and maintenance manuals.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Cleaning Agents: Use cleaning materials and agents recommended by manufacturer or fabricator of the surface to be cleaned. Do not use cleaning agents that are potentially hazardous to health or property or that might damage finished surfaces.

PART 3 - EXECUTION

3.1 FINAL CLEANING

- A. General: Provide final cleaning. Conduct cleaning and waste-removal operations to comply with local laws and ordinances and Federal and local environmental and antipollution regulations.
- B. Cleaning: Employ experienced workers or professional cleaners for final cleaning. Clean each surface or unit to condition expected in an average commercial building cleaning and maintenance program. Comply with manufacturer's written instructions.

1. Complete the following cleaning operations before requesting inspection for certification of Substantial Completion for entire Project or for a portion of Project:
 - a. Clean Project site, yard, and grounds, in areas disturbed by construction activities, including landscape development areas, of rubbish, waste material, litter, and other foreign substances.
 - b. Sweep paved areas broom clean. Remove petrochemical spills, stains, and other foreign deposits.
 - c. Rake grounds that are neither planted nor paved to a smooth, even-textured surface.
 - d. Remove tools, construction equipment, machinery, and surplus material from Project site.
 - e. Remove snow and ice to provide safe access to building.
 - f. Clean exposed exterior and interior hard-surfaced finishes to a dirt-free condition, free of stains, films, and similar foreign substances. Avoid disturbing natural weathering of exterior surfaces. Restore reflective surfaces to their original condition.
 - g. Remove debris and surface dust from limited access spaces, including roofs, plenums, shafts, trenches, equipment vaults, manholes, attics, and similar spaces.
 - h. Sweep concrete floors broom clean in unoccupied spaces.
 - i. Vacuum carpet and similar soft surfaces, removing debris and excess nap; shampoo if visible soil or stains remain.
 - j. Clean transparent materials, including mirrors and glass in doors and windows. Remove glazing compounds and other noticeable, vision-obscuring materials. Replace chipped or broken glass and other damaged transparent materials. Polish mirrors and glass, taking care not to scratch surfaces.
 - k. Remove labels that are not permanent.
 - l. Touch up and otherwise repair and restore marred, exposed finishes and surfaces. Replace finishes and surfaces that cannot be satisfactorily repaired or restored or that already show evidence of repair or restoration.
 - 1) Do not paint over "UL" and similar labels, including mechanical and electrical nameplates.
 - m. Wipe surfaces of mechanical and electrical equipment and similar equipment. Remove excess lubrication, paint and mortar droppings, and other foreign substances.
 - n. Replace parts subject to unusual operating conditions.
 - o. Clean plumbing fixtures to a sanitary condition, free of stains, including stains resulting from water exposure.
 - p. Replace disposable air filters and clean permanent air filters. Clean exposed surfaces of diffusers, registers, and grills.
 - q. Clean ducts, blowers, and coils if units were operated without filters during construction.
 - r. Clean light fixtures, lamps, globes, and reflectors to function with full efficiency. Replace burned-out bulbs, and those noticeably dimmed by hours of use, and defective and noisy starters in fluorescent and mercury vapor fixtures to comply with requirements for new fixtures.

- s. Leave Project clean and ready for occupancy.
- C. Comply with safety standards for cleaning. Do not burn waste materials. Do not bury debris or excess materials on Owner's property. Do not discharge volatile, harmful, or dangerous materials into drainage systems. Remove waste materials from Project site and dispose of lawfully.

END OF SECTION 01770

SECTION 01781 - PROJECT RECORD DOCUMENTS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes administrative and procedural requirements for Project Record Documents, including the following:
 - 1. Record Drawings.
 - 2. Record Specifications.
 - 3. Record Product Data.
- B. Related Sections include the following:
 - 1. Division 1 Section "Closeout Procedures" for general closeout procedures.
 - 2. Divisions 2 through 16 Sections for specific requirements for Project Record Documents of the Work in those Sections.

1.3 SUBMITTALS

- A. Record Drawings: Comply with the following:
 - 1. Number of Copies: Submit one set of marked-up Record Prints.
- B. Record Specifications: Submit one copy of Project's Specifications, including addenda and contract modifications.
- C. Record Product Data: Submit one copy of each Product Data submittal.
 - 1. Where Record Product Data is required as part of operation and maintenance manuals, submit marked-up Product Data as an insert in manual instead of submittal as Record Product Data.

PART 2 - PRODUCTS

2.1 RECORD DRAWINGS

- A. Record Prints: Maintain one set of blue- or black-line white prints of the Contract Drawings and Shop Drawings.
1. Preparation: Mark Record Prints to show the actual installation where installation varies from that shown originally. Require individual or entity who obtained record data, whether individual or entity is Installer, subcontractor, or similar entity, to prepare the marked-up Record Prints.
 - a. Give particular attention to information on concealed elements that would be difficult to identify or measure and record later.
 - b. Accurately record information in an understandable drawing technique.
 - c. Record data as soon as possible after obtaining it. Record and check the markup before enclosing concealed installations.
 2. Content: Types of items requiring marking include, but are not limited to, the following:
 - a. Dimensional changes to Drawings.
 - b. Revisions to details shown on Drawings.
 - c. Depths of foundations below first floor.
 - d. Locations and depths of underground utilities.
 - e. Revisions to routing of piping and conduits.
 - f. Revisions to electrical circuitry.
 - g. Actual equipment locations.
 - h. Duct size and routing.
 - i. Locations of concealed internal utilities.
 - j. Changes made by Change Order or Change Directive.
 - k. Changes made following Architect's written orders.
 - l. Details not on the original Contract Drawings.
 - m. Field records for variable and concealed conditions.
 - n. Record information on the Work that is shown only schematically.
 3. Mark the Contract Drawings or Shop Drawings, whichever is most capable of showing actual physical conditions, completely and accurately. If Shop Drawings are marked, show cross-reference on the Contract Drawings.
 4. Mark record sets with erasable, red-colored pencil. Use other colors to distinguish between changes for different categories of the Work at same location.
 5. Mark important additional information that was either shown schematically or omitted from original Drawings.
 6. Note Construction Change Directive numbers, alternate numbers, Change Order numbers, and similar identification, where applicable.

2.2 RECORD SPECIFICATIONS

- A. Preparation: Mark Specifications to indicate the actual product installation where installation varies from that indicated in Specifications, addenda, and contract modifications.
 - 1. Give particular attention to information on concealed products and installations that cannot be readily identified and recorded later.
 - 2. Mark copy with the proprietary name and model number of products, materials, and equipment furnished, including substitutions and product options selected.
 - 3. Record the name of manufacturer, supplier, Installer, and other information necessary to provide a record of selections made.
 - 4. For each principal product, indicate whether Record Product Data has been submitted in operation and maintenance manuals instead of submitted as Record Product Data.
 - 5. Note related Change Orders and Record Drawings where applicable.

2.3 RECORD PRODUCT DATA

- A. Preparation: Mark Product Data to indicate the actual product installation where installation varies substantially from that indicated in Product Data submittal.
 - 1. Give particular attention to information on concealed products and installations that cannot be readily identified and recorded later.
 - 2. Include significant changes in the product delivered to Project site and changes in manufacturer's written instructions for installation.
 - 3. Note related Change Orders and Record Drawings where applicable.

2.4 MISCELLANEOUS RECORD SUBMITTALS

- A. Assemble miscellaneous records required by other Specification Sections for miscellaneous record keeping and submittal in connection with actual performance of the Work. Bind or file miscellaneous records and identify each, ready for continued use and reference.

PART 3 - EXECUTION

3.1 RECORDING AND MAINTENANCE

- A. Recording: Maintain one copy of each submittal during the construction period for Project Record Document purposes. Post changes and modifications to Project Record Documents as they occur; do not wait until the end of Project.

END OF SECTION 01781

**DIVISION 15
MECHANICAL**

- 15010 GENERAL REQUIREMENTS
- 15050 BASIC MATERIALS & METHODS
- 15195 FACILITY NATURAL-GAS PIPING
- 15510 HEATING BOILERS ACCESSORIES

SECTION 15010 - GENERAL REQUIREMENTS

PART 1 - GENERAL

1.1 GENERAL:

- A. General Conditions and Division 01 apply to this Division.

1.2 SCOPE:

- A. Includes -
 1. Furnish all labor, materials, and equipment necessary for the completion of the mechanical and plumbing scope of work.
 2. Placing the air conditioning, heating, ventilating, and exhaust systems into full operation and continuing their operation during each working day of testing and balancing.
 3. The satisfactory performance of the completed systems is a requirement of this specification.

1.3 SITE INSPECTION:

- A. The Contractor shall examine the site and understand the conditions which may affect the performance of work of this Division before submitting proposals for this work.
- B. No subsequent allowance for time or money will be considered for any consequence related to failure to examine existing site conditions.

1.4 DRAWINGS:

- A. Mechanical drawings show general arrangement of piping, ductwork, equipment, etc; however, locations are to be regarded as shown diagrammatically only. Follow as closely as actual building construction and work of other trades will permit.
- B. Because of the small scale of mechanical drawings, it is not possible to indicate all offsets, fittings, and accessories which may be required. Investigate existing structural and finished conditions affecting this work and arrange work accordingly, providing such fittings, valves, and accessories required to meet conditions.
- C. If changes in location of piping, equipment, ducts, etc. are required due to lack of coordination of work under this division, such changes shall be made without charge. Contractor shall review drawings with local and state agencies having jurisdiction and any changes required by them shall be brought to the attention of the Engineer Architect Contracting Officer prior to bidding or commencement of work.

1.5 CODE REQUIREMENTS, FEES, AND PERMITS:

- A. The work shall be installed in accordance with the following applicable codes, ordinances and standards unless otherwise specified. The codes and standards shall include but not be limited to and be of the latest and current editions.
1. American Boiler and Affiliated Industries (AB and AI)
 2. American Gas Association (AGA)
 3. Air Movement and Control Association (AMCA)
 4. American National Standards Institute (ANSI)
 5. Air Conditioning & Refrigeration Institute (ARI)
 6. American Society of Heating, Refrigeration and Air Conditioning Engineers (ASHRAE)
 7. American Society of Mechanical Engineers (ASME)
 8. American Society of Testing Materials (ASTM)
 9. American Standards Association (ASA)
 10. American Water Works Association (AWWA)
 11. American Welding Society (AWS)
 12. Associated Air Balance Council (AABC)
 13. Heat Exchange Institute (HEI)
 14. Hydraulic Institute (HI)
 15. IBR
 16. National Electrical Code (NEC)
 17. National Fire Protection Association (NFPA)
 18. Sheet Metal and Air Conditioning contractors National Association (SMACNA)
 19. Underwriters Laboratories (UL)
 20. International Building Code (IBC) 2003 Ed
 21. International Mechanical Code (IMC) 2003 Ed
 22. International Plumbing Code (IPC) with Utah Amendments 2003 Ed
 23. International Energy Conservation Code (IECC) 2003 Ed
 24. Utah State Safety Orders (OSHA/UOSH)
 25. Utah Fire Rating Bureau
 26. Utah Boiler and Pressure Vessel Law
 27. Utah Air Conservation Regulations/Waste Disposal regulations.
 28. ASHRAE Ventilation STD.62-2001.
- B. Should drawings conflict with any code, the code shall govern. If drawings and specifications establish a quality exceeding the code, the drawings and specifications shall govern. If conflicts do exist among the drawings, specifications and codes, the same shall be brought to the attention of the Engineer Architect Contracting Officer in writing prior to bidding, otherwise Contractor shall comply with applicable codes.
- C. The latest edition of all codes shall be used.
- D. Contractor shall give all notices, obtain all necessary permits, file necessary plans, prepare documents and obtain approvals, and pay all fees required for completion of the mechanical and plumbing work outlined in this Division of the specifications and shown on the Mechanical Drawings.

1.6 OPERATION AND MAINTENANCE MANUAL FOR MECHANICAL SYSTEMS:

- A. Upon completion of work and before final payment, Contractor shall furnish and deliver to the Owner, through the Engineer, installation, operation and maintenance manuals with instructions for all new materials and equipment used in the building. The contractor shall provide three (3) hard copies of the manuals, and three (3) CD's with electronic copies of the manuals. Electronic information shall be .PDF format. The CD's shall include the same information as the hard copies, and shall be organized in the same manner with electronic bookmarks for each section. CD case and the CD itself shall be labeled the same as the hard copies of the manuals.
- B. Bind Operation and Maintenance Manual for Mechanical Systems in a hard-backed piano hinge loose-leaf binder with strong sturdy cover. The project name shall be on the spine and the front of the binder. The front of the binder shall include the following information:

OPERATION
AND
MAINTENANCE
MANUAL
for MECHANICAL SYSTEMS of
(Name of Project)
(Location of Project)
(Date of Project Award)
(Name of Architect)

- C. Introduction
1. Title page including name of project, project number, date awarded and date of substantial completion.
 2. Second page shall contain the names, phone numbers and addresses of Architect, Consulting Engineers, Mechanical Contractor, and General Contractor.
 3. Third page shall include a Table of Contents for the entire manual.
- D. First Section - Summary
1. First page shall contain the contractor's warranties.
 2. Second page shall contain a list of names, addresses and phone numbers of contractors and all sub-contractors and work to which each was assigned.
 3. Final page or pages shall contain an equipment list. The list shall contain each item of equipment or material for which a submittal was required giving ID or tag no as contained on the drawings make and model No. Serial No. Identification No. Location in building, function along with the name, address, and phone number of the supplier.

- E. The second section shall contain Mechanical Equipment O&M data including:
 - 1. Mechanical maintenance schedule, including a lubrication list when necessary.
 - 2. Mechanical Equipment Operation and Maintenance Data including:
 - a. Equipment descriptions
 - b. Detailed installation instruction, operating and maintenance instructions. Instructions include in a step by step manner identifying start-up, operating, shutdown and emergency action sequence sufficiently clear so a person unfamiliar with the equipment could perform its operations.
 - c. Equipment drawings, performance curves, operating characteristics, etc.
 - d. Name addresses and phone number of manufacturer, fabricator and local vender clearly printed or stamped on cover.
 - e. Complete parts listing which include catalog number, serial number, contract number or other accurate provision for ordering replacement and spare parts.
 - f. Certified drawings, where applicable, showing assembly of parts and general dimensions.
 - 3. Approved Mechanical submittals
- F. The third section shall contain Plumbing Equipment O&M data including:
 - 1. Section shall contain general product catalog cuts, as well as exploded view drawings with parts lists for all valves and other items with multiple parts.
 - 2. Approved Plumbing submittals
- G. The fourth section shall contain Controls O&M data including:
 - 1. Sequence of Operation
 - 2. Description of each operating system included location of switches, breakers, thermostats, and control devices. Provide a single line diagram, showing set points, normal operating parameters for all loads, pressures, temperatures and flow check points; Describe all alarms and cautions for operation.
 - 3. Provide schematic control diagrams, panel diagrams, wiring diagrams, etc. for each separate fan system, chilled water system, hot water system, exhaust air system, pumps, etc. Each control diagram shall show a schematic representation of mechanical equipment and location of start-stop switches, insertion thermostats, thermometers, pressure gauges, automatic valves, etc. The correct reading for each control instrument shall be marked on the diagram.
- H. The fifth section shall contain a complete air and water test and balance report. The report shall contain the name, address and phone number of the agency. It shall also include:

1. Floor plans showing all air openings and thermometer locations clearly marked and cross referenced with data sheets. Format may be 8 1/2 x 11 or 11x14 if legible.
 2. Data sheets showing amount of air and water at each setting. See sections 15960 and 15970.
 3. List of equipment with date of last calibration.
- I. Drawings and reproducible masters of drawings as required in individual specification sections, are not to be bound in volumes but are to be delivered separate with the maintenance manuals.
- J. See the following checklist for assistance in assembling manual:

Item #	Description	Y, N, or NA
1.	3 ring heavy duty binder with Project name, number and date on cover and project name on spine.	
2.	O&M manual on CD (with label on CD matching label on manual). Electronic copy shall be a PDF file with bookmarks that match the tabs in the hard copy.	
3.	Title Page [including project name, number, address, date awarded, date of substantial completion]	
4.	Second Page Contact List [including architect (if applicable), mechanical engineer, mechanical contractor, and general contractor (if applicable)]	
5.	Table of Contents	
6.	Section 1 - Summary	
A.	Warranty	
B.	Mechanical's Sub-contractor List	
C.	Vendor List	
D.	Equipment List	
7.	Section 2 – Mechanical Equipment	
A.	Maintenance Schedule (including lubrication list)	
B.	Mechanical Equipment O&M Data (for each piece of equipment submitted) per specifications	
C.	Approved mechanical submittals	
8.	Section 3 – Plumbing Equipment	
A.	Plumbing equipment O&M data	
B.	Approved plumbing submittals	
9.	Section 4 - Controls	
A.	Sequence of Operation	
B.	Controls diagrams	
C.	Controls Equipment	
10.	Section 5 – Test and Balance Report	
A.	Complete Test and Balance Report per specifications	

1.7 OPERATION AND MAINTENANCE INSTRUCTIONS:

- A. Contractor shall instruct building maintenance personnel in the operation and maintenance of the installed mechanical systems utilizing the Operation and Maintenance Manual when so doing.
- B. Minimum instruction periods shall be as follows -
 - 1. Mechanical/Controls - Four hours.
- C. Instruction periods shall occur before final inspection when systems are properly working and before final payment is made.
- D. None of these instructional periods shall overlap each other.
- E. An additional four hours of instruction will be provided after 60 days of system operation by owner to insure proper system operation and answer questions.

1.8 RECORD DRAWINGS:

- A. Contractor shall keep an up-to-date set of mechanical and plumbing drawings in his custody showing all changes in red, clearly defined and neatly drafted by him. At the end of construction, he shall turn these drawings over to the Engineer Architect Contracting Officer. Record drawings must be completed and submitted prior to final inspection.

PART 2 - PRODUCTS

(Not Used)

PART 3 - EXECUTION

(Not Used)

END OF SECTION 15010

SECTION 15050 - BASIC MECHANICAL MATERIALS AND METHODS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes the following:
 - 1. Piping materials and installation instructions common to most piping systems.
 - 2. Dielectric fittings.
 - 3. Mechanical demolition.
 - 4. Equipment installation requirements common to equipment sections.

1.3 DEFINITIONS

- A. Finished Spaces: Spaces other than mechanical and electrical equipment rooms, furred spaces, pipe and duct shafts, unheated spaces immediately below roof, spaces above ceilings, unexcavated spaces, crawlspaces, and tunnels.
- B. Exposed, Interior Installations: Exposed to view indoors. Examples include finished occupied spaces and mechanical equipment rooms.
- C. Exposed, Exterior Installations: Exposed to view outdoors or subject to outdoor ambient temperatures and weather conditions. Examples include rooftop locations.
- D. Concealed, Interior Installations: Concealed from view and protected from physical contact by building occupants. Examples include above ceilings and in duct shafts.
- E. Concealed, Exterior Installations: Concealed from view and protected from weather conditions and physical contact by building occupants but subject to outdoor ambient temperatures. Examples include installations within unheated shelters.
- F. The following are industry abbreviations for plastic materials:
 - 1. ABS: Acrylonitrile-butadiene-styrene plastic.
 - 2. CPVC: Chlorinated polyvinyl chloride plastic.
 - 3. PVC: Polyvinyl chloride plastic.

1.4 QUALITY ASSURANCE

- A. Steel Pipe Welding: Qualify processes and operators according to ASME Boiler and Pressure Vessel Code: Section IX, "Welding and Brazing Qualifications."
 - 1. Comply with provisions in ASME B31 Series, "Code for Pressure Piping."
 - 2. Certify that each welder has passed AWS qualification tests for welding processes involved and that certification is current.

1.5 DELIVERY, STORAGE, AND HANDLING

- A. Deliver pipes and tubes with factory-applied end caps. Maintain end caps through shipping, storage, and handling to prevent pipe end damage and to prevent entrance of dirt, debris, and moisture.
- B. Store plastic pipes protected from direct sunlight. Support to prevent sagging and bending.

1.6 COORDINATION

- A. Arrange for pipe spaces, chases, slots, and openings in building structure during progress of construction, to allow for mechanical installations.
- B. Coordinate installation of required supporting devices and set sleeves in poured-in-place concrete and other structural components as they are constructed.
- C. Coordinate requirements for access panels and doors for mechanical items requiring access that are concealed behind finished surfaces.

PART 2 - PRODUCTS

2.1 PIPE, TUBE, AND FITTINGS

- A. Refer to individual Division 15 piping Sections for pipe, tube, and fitting materials and joining methods.
- B. Pipe Threads: ASME B1.20.1 for factory-threaded pipe and pipe fittings.

2.2 DIELECTRIC FITTINGS

- A. Description: Combination fitting of copper alloy and ferrous materials with threaded, solder-joint, plain, or weld-neck end connections that match piping system materials.
- B. Insulating Material: Suitable for system fluid, pressure, and temperature.

- C. Dielectric Unions: Factory-fabricated, union assembly, for 250-psig minimum working pressure at 180 deg F.
 - 1. Available Manufacturers:
 - a. Capitol Manufacturing Co.
 - b. Central Plastics Company.
 - c. Eclipse, Inc.
 - d. Epco Sales, Inc.
 - e. Hart Industries, International, Inc.
 - f. Watts Industries, Inc.; Water Products Div.
 - g. Zurn Industries, Inc.; Wilkins Div.
 - h. Prior Approved Equal.

PART 3 - EXECUTION

3.1 MECHANICAL DEMOLITION

- A. Disconnect, demolish, and remove mechanical systems, equipment, and components indicated to be removed.
 - 1. Piping to Be Removed: Remove portion of piping indicated to be removed and cap or plug remaining piping with same or compatible piping material.
 - 2. Piping to Be Abandoned in Place: Drain piping and cap or plug piping with same or compatible piping material.
 - 3. Ducts to Be Removed: Remove portion of ducts indicated to be removed and plug remaining ducts with same or compatible ductwork material.
 - 4. Ducts to Be Abandoned in Place: Cap or plug ducts with same or compatible ductwork material.
 - 5. Equipment to Be Removed: Disconnect and cap services and remove equipment.
 - 6. Equipment to Be Removed and Reinstalled: Disconnect and cap services and remove, clean, and store equipment; when appropriate, reinstall, reconnect, and make equipment operational.
 - 7. Equipment to Be Removed and Salvaged: Disconnect and cap services and remove equipment and deliver to Owner.
- B. If pipe, insulation, or equipment to remain is damaged in appearance or is unserviceable, remove damaged or unserviceable portions and replace with new products of equal capacity and quality.

3.2 PIPING SYSTEMS - COMMON REQUIREMENTS

- A. Install piping according to the following requirements and Division 15 Sections specifying piping systems.
- B. Drawing plans, schematics, and diagrams indicate general location and arrangement of piping systems. Drawings do not show every offset, or bend that may be required.

Indicated locations and arrangements were used to size pipe and calculate friction loss, expansion, pump sizing, and other design considerations. Install piping as indicated unless deviations to layout are approved on Coordination Drawings.

- C. Install piping in concealed locations, unless otherwise indicated and except in equipment rooms and service areas.
- D. Install piping indicated to be exposed and piping in equipment rooms and service areas at right angles or parallel to building walls. Diagonal runs are prohibited unless specifically indicated otherwise.
- E. Install piping above accessible ceilings to allow sufficient space for ceiling panel removal.
- F. Install piping to permit valve servicing.
- G. Install piping at indicated slopes.
- H. Install piping free of sags and bends.
- I. Install fittings for changes in direction and branch connections.
- J. Install piping to allow application of insulation.
- K. Select system components with pressure rating equal to or greater than system operating pressure.
- L. Install escutcheons for penetrations of walls, ceilings, and floors where indicated on drawings and where penetrating will be visible to public.
- M. Install sleeves for pipes passing through concrete and masonry walls, gypsum-board partitions, and concrete floor and roof slabs.
 - 1. Cut sleeves to length for mounting flush with both surfaces.
 - a. Exception: Extend sleeves installed in floors of mechanical equipment areas or other wet areas 2 inches above finished floor level. Extend cast-iron sleeve fittings below floor slab as required to secure clamping ring if ring is specified.
 - 2. Install sleeves in new walls and slabs as new walls and slabs are constructed.
 - 3. Install sleeves that are large enough to provide 1/4-inch annular clear space between sleeve and pipe or pipe insulation. Use the following sleeve materials:
 - 4. Except for underground wall penetrations, seal annular space between sleeve and pipe or pipe insulation, using joint sealants appropriate for size, depth, and location of joint.
- N. Aboveground, Exterior-Wall Pipe Penetrations: Seal penetrations using sleeves and mechanical sleeve seals. Select sleeve size to allow for 1-inch annular clear space between pipe and sleeve for installing mechanical sleeve seals.

- O. Underground, Exterior-Wall Pipe Penetrations: Install cast-iron "wall pipes" for sleeves. Seal pipe penetrations using mechanical sleeve seals. Select sleeve size to allow for 1-inch annular clear space between pipe and sleeve for installing mechanical sleeve seals.
 - 1. Mechanical Sleeve Seal Installation: Select type and number of sealing elements required for pipe material and size. Position pipe in center of sleeve. Assemble mechanical sleeve seals and install in annular space between pipe and sleeve. Tighten bolts against pressure plates that cause sealing elements to expand and make watertight seal.
- P. Fire-Barrier Penetrations: Maintain indicated fire rating of walls, partitions, ceilings, and floors at pipe penetrations. Seal pipe penetrations with firestop materials.
- Q. Verify final equipment locations for roughing-in.
- R. Refer to equipment specifications in other Sections of these Specifications for roughing-in requirements.

3.3 PIPING JOINT CONSTRUCTION

- A. Join pipe and fittings according to the following requirements and Division 15 Sections specifying piping systems.
- B. Ream ends of pipes and tubes and remove burrs. Bevel plain ends of steel pipe.
- C. Remove scale, slag, dirt, and debris from inside and outside of pipe and fittings before assembly.
- D. Soldered Joints: Apply ASTM B 813, water-flushable flux, unless otherwise indicated, to tube end. Construct joints according to ASTM B 828 or CDA's "Copper Tube Handbook," using lead-free solder alloy complying with ASTM B 32.
- E. Brazed Joints: Construct joints according to AWS's "Brazing Handbook," "Pipe and Tube" Chapter, using copper-phosphorus brazing filler metal complying with AWS A5.8.
- F. Threaded Joints: Thread pipe with tapered pipe threads according to ASME B1.20.1. Cut threads full and clean using sharp dies. Ream threaded pipe ends to remove burrs and restore full ID. Join pipe fittings and valves as follows:
 - 1. Apply appropriate tape or thread compound to external pipe threads unless dry seal threading is specified.
 - 2. Damaged Threads: Do not use pipe or pipe fittings with threads that are corroded or damaged. Do not use pipe sections that have cracked or open welds.
- G. Welded Joints: Construct joints according to AWS D10.12, using qualified processes and welding operators according to Part 1 "Quality Assurance" Article.

- H. Flanged Joints: Select appropriate gasket material, size, type, and thickness for service application. Install gasket concentrically positioned. Use suitable lubricants on bolt threads.

3.4 PIPING CONNECTIONS

- A. Make connections according to the following, unless otherwise indicated:
 1. Install unions, in piping NPS 2 and smaller, adjacent to each valve and at final connection to each piece of equipment.
 2. Install flanges, in piping NPS 2-1/2 and larger, adjacent to flanged valves and at final connection to each piece of equipment.
 3. Dry Piping Systems: Install dielectric unions and flanges to connect piping materials of dissimilar metals.
 4. Wet Piping Systems: Install dielectric coupling and nipple fittings to connect piping materials of dissimilar metals.

3.5 EQUIPMENT INSTALLATION - COMMON REQUIREMENTS

- A. Install equipment to allow maximum possible headroom unless specific mounting heights are not indicated.
- B. Install equipment level and plumb, parallel and perpendicular to other building systems and components in exposed interior spaces, unless otherwise indicated.
- C. Install mechanical equipment to facilitate service, maintenance, and repair or replacement of components. Connect equipment for ease of disconnecting, with minimum interference to other installations. Extend grease fittings to accessible locations.
- D. Install equipment to allow right of way for piping installed at required slope.

3.6 PAINTING

- A. Painting of mechanical systems, equipment, and components is specified in Division 9.
- B. Damage and Touchup: Repair marred and damaged factory-painted finishes with materials and procedures to match original factory finish.

END OF SECTION 15050

SECTION 15195 - FACILITY NATURAL-GAS PIPING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Pipes, tubes, and fittings.
 - 2. Piping and tubing joining materials.
 - 3. Valves.

1.3 DEFINITIONS

- A. Finished Spaces: Spaces other than mechanical and electrical equipment rooms, furred spaces, pipe and duct shafts, unheated spaces immediately below roof, spaces above ceilings, unexcavated spaces, crawlspaces, and tunnels.
- B. Exposed, Interior Installations: Exposed to view indoors. Examples include finished occupied spaces and mechanical equipment rooms.
- C. Exposed, Exterior Installations: Exposed to view outdoors or subject to outdoor ambient temperatures and weather conditions. Examples include rooftop locations.

1.4 PERFORMANCE REQUIREMENTS

- A. Minimum Operating-Pressure Ratings:
 - 1. Piping and Valves: 100 psig minimum unless otherwise indicated.

1.5 SUBMITTALS

- A. Product Data: For each type of the following:
 - 1. Piping specialties.
 - 2. Valves. Include pressure rating, capacity, settings, and electrical connection data of selected models.
 - 3. Dielectric fittings.
- B. Welding certificates.

- C. Field quality-control reports.
- D. Operation and Maintenance Data: For pressure regulators to include in emergency, operation, and maintenance manuals.

1.6 QUALITY ASSURANCE

- A. Steel Support Welding Qualifications: Qualify procedures and personnel according to AWS D1.1/D1.1M, "Structural Welding Code - Steel."
- B. Pipe Welding Qualifications: Qualify procedures and operators according to ASME Boiler and Pressure Vessel Code.
- C. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.

1.7 DELIVERY, STORAGE, AND HANDLING

- A. Handling Flammable Liquids: Remove and dispose of liquids from existing natural-gas piping according to requirements of authorities having jurisdiction.
- B. Deliver pipes and tubes with factory-applied end caps. Maintain end caps through shipping, storage, and handling to prevent pipe end damage and to prevent entrance of dirt, debris, and moisture.
- C. Store and handle pipes and tubes having factory-applied protective coatings to avoid damaging coating, and protect from direct sunlight.
- D. Protect stored PE pipes and valves from direct sunlight.

1.8 PROJECT CONDITIONS

- A. Perform site survey, research public utility records, and verify existing utility locations. Contact utility-locating service for area where Project is located.
- B. Interruption of Existing Natural-Gas Service: Do not interrupt natural-gas service to facilities occupied by Owner or others unless permitted under the following conditions and then only after arranging to provide purging and startup of natural-gas supply according to requirements indicated:
 - 1. Notify Owner no fewer than three days in advance of proposed interruption of natural-gas service.
 - 2. Do not proceed with interruption of natural-gas service without Owner's written permission.

1.9 COORDINATION

- A. Coordinate sizes and locations of concrete bases with actual equipment provided.
- B. Coordinate requirements for access panels and doors for valves installed concealed behind finished surfaces. Comply with requirements in Division 8 Section "Access Doors and Frames."

PART 2 - PRODUCTS

2.1 PIPES, TUBES, AND FITTINGS

- A. Steel Pipe: ASTM A 53/A 53M, black steel, Schedule 40, Type E or S, Grade B.
 - 1. Malleable-Iron Threaded Fittings: ASME B16.3, Class 150, standard pattern.
 - 2. Wrought-Steel Welding Fittings: ASTM A 234/A 234M for butt welding and socket welding.
 - 3. Unions: ASME B16.39, Class 150, malleable iron with brass-to-iron seat, ground joint, and threaded ends.
 - 4. Forged-Steel Flanges and Flanged Fittings: ASME B16.5, minimum Class 150, including bolts, nuts, and gaskets of the following material group, end connections, and facings:
 - a. Material Group: 1.1.
 - b. End Connections: Threaded or butt welding to match pipe.
 - c. Lapped Face: Not permitted underground.
 - d. Gasket Materials: ASME B16.20, metallic, flat, asbestos free, aluminum o-rings, and spiral-wound metal gaskets.
 - e. Bolts and Nuts: ASME B18.2.1, carbon steel aboveground and stainless steel underground.
 - 5. Protective Coating for Underground Piping: Factory-applied, three-layer coating of epoxy, adhesive, and PE.
 - a. Joint Cover Kits: Epoxy paint, adhesive, and heat-shrink PE sleeves.

2.2 JOINING MATERIALS

- A. Joint Compound and Tape: Suitable for natural gas.
- B. Welding Filler Metals: Comply with AWS D10.12/D10.12M for welding materials appropriate for wall thickness and chemical analysis of steel pipe being welded.

2.3 MANUAL GAS SHUTOFF VALVES

- A. See "Underground Manual Gas Shutoff Valve Schedule" and "Aboveground Manual Gas Shutoff Valve Schedule" Articles for where each valve type is applied in various services.
- B. General Requirements for Metallic Valves, NPS 2 and Smaller: Comply with ASME B16.33.
 - 1. CWP Rating: 125 psig.
 - 2. Threaded Ends: Comply with ASME B1.20.1.
 - 3. Dryseal Threads on Flare Ends: Comply with ASME B1.20.3.
 - 4. Tamperproof Feature: Locking feature for valves indicated in "Underground Manual Gas Shutoff Valve Schedule" and "Aboveground Manual Gas Shutoff Valve Schedule" Articles.
 - 5. Listing: Listed and labeled by an NRTL acceptable to authorities having jurisdiction for valves 1 inch and smaller.
 - 6. Service Mark: Valves 1-1/4 inches to NPS 2 shall have initials "WOG" permanently marked on valve body.
- C. General Requirements for Metallic Valves, NPS 2-1/2 and Larger: Comply with ASME B16.38.
 - 1. CWP Rating: 125 psig.
 - 2. Flanged Ends: Comply with ASME B16.5 for steel flanges.
 - 3. Tamperproof Feature: Locking feature for valves indicated in "Underground Manual Gas Shutoff Valve Schedule" and "Aboveground Manual Gas Shutoff Valve Schedule" Articles.
 - 4. Service Mark: Initials "WOG" shall be permanently marked on valve body.
- D. One-Piece, Bronze Ball Valve with Bronze Trim: MSS SP-110.
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. BrassCraft Manufacturing Company; a Masco company.
 - b. Conbraco Industries, Inc.; Apollo Div.
 - c. Lyall, R. W. & Company, Inc.
 - d. McDonald, A. Y. Mfg. Co.
 - e. Perfection Corporation; a subsidiary of American Meter Company.
 - f. Prior approved equal..
 - 2. Body: Bronze, complying with ASTM B 584.
 - 3. Ball: Chrome-plated brass.
 - 4. Stem: Bronze; blowout proof.
 - 5. Seats: Reinforced TFE; blowout proof.
 - 6. Packing: Separate packnut with adjustable-stem packing threaded ends.

7. Ends: Threaded, flared, or socket as indicated in "Underground Manual Gas Shutoff Valve Schedule" and "Aboveground Manual Gas Shutoff Valve Schedule" Articles.
8. CWP Rating: 600 psig.
9. Listing: Valves NPS 1 and smaller shall be listed and labeled by an NRTL acceptable to authorities having jurisdiction.
10. Service: Suitable for natural-gas service with "WOG" indicated on valve body.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine roughing-in for natural-gas piping system to verify actual locations of piping connections before equipment installation.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Close equipment shutoff valves before turning off natural gas to premises or piping section.
- B. Inspect natural-gas piping according to the International Fuel Gas Code to determine that natural-gas utilization devices are turned off in piping section affected.
- C. Comply with the International Fuel Gas Code requirements for prevention of accidental ignition.

3.3 INDOOR PIPING INSTALLATION

- A. Comply with the International Fuel Gas Code for installation and purging of natural-gas piping.
- B. Drawing plans, schematics, and diagrams indicate general location and arrangement of piping systems. Indicated locations and arrangements are used to size pipe and calculate friction loss, expansion, and other design considerations. Install piping as indicated unless deviations to layout are approved on Coordination Drawings.
- C. Arrange for pipe spaces, chases, slots, sleeves, and openings in building structure during progress of construction, to allow for mechanical installations.
- D. Install piping in concealed locations unless otherwise indicated and except in equipment rooms and service areas.
- E. Install piping indicated to be exposed and piping in equipment rooms and service areas at right angles or parallel to building walls. Diagonal runs are prohibited unless specifically indicated otherwise.

- F. Install piping above accessible ceilings to allow sufficient space for ceiling panel removal.
- G. Locate valves for easy access.
- H. Install natural-gas piping at uniform grade of 2 percent down toward drip and sediment traps.
- I. Install piping free of sags and bends.
- J. Install fittings for changes in direction and branch connections.
- K. Install escutcheons at penetrations of interior walls, ceilings, and floors.
 - 1. New Piping:
 - a. Piping with Fitting or Sleeve Protruding from Wall: One-piece, deep-pattern type.
 - b. Piping at Wall and Floor Penetrations in Finished Spaces: One-piece, cast-brass type with polished chrome-plated finish.
 - c. Piping at Wall and Floor Penetrations in Finished Spaces: One-piece, stamped-steel type.
 - d. Piping at Ceiling Penetrations in Finished Spaces: One-piece or split-casting, cast-brass type with polished chrome-plated finish.
 - e. Piping in Unfinished Service Spaces: One-piece, cast-brass type with polished chrome-plated or rough-brass finish.
- L. Fire-Barrier Penetrations: Maintain indicated fire rating of walls, partitions, ceilings, and floors at pipe penetrations. Seal pipe penetrations with firestop materials. Comply with requirements in Division 7 Section "Through-Penetration Firestop Systems."
- M. Verify final equipment locations for roughing-in.
- N. Comply with requirements in Sections specifying gas-fired appliances and equipment for roughing-in requirements.
- O. Drips and Sediment Traps: Install drips at points where condensate may collect, including service-meter outlets. Locate where accessible to permit cleaning and emptying. Do not install where condensate is subject to freezing.
 - 1. Construct drips and sediment traps using tee fitting with bottom outlet plugged or capped. Use nipple a minimum length of 3 pipe diameters, but not less than 3 inches long and same size as connected pipe. Install with space below bottom of drip to remove plug or cap.
- P. Extend relief vent connections for service regulators, line regulators, and overpressure protection devices to outdoors and terminate with weatherproof vent cap.
- Q. Conceal pipe installations in walls, pipe spaces, utility spaces, above ceilings, below grade or floors, and in floor channels unless indicated to be exposed to view.

- R. Concealed Location Installations: Except as specified below, install concealed natural-gas piping and piping installed under the building in containment conduit constructed of steel pipe with welded joints as described in Part 2. Install a vent pipe from containment conduit to outdoors and terminate with weatherproof vent cap.
1. Above Accessible Ceilings: Natural-gas piping, fittings, valves, and regulators may be installed in accessible spaces without containment conduit.
 2. In Floors: Install natural-gas piping with welded or brazed joints and protective coating in cast-in-place concrete floors. Cover piping to be cast in concrete slabs with minimum of 1-1/2 inches of concrete. Piping may not be in physical contact with other metallic structures such as reinforcing rods or electrically neutral conductors. Do not embed piping in concrete slabs containing quick-set additives or cinder aggregate.
 3. In Floor Channels: Install natural-gas piping in floor channels. Channels must have cover and be open to space above cover for ventilation.
 4. In Walls or Partitions: Protect tubing installed inside partitions or hollow walls from physical damage using steel striker barriers at rigid supports.
 - a. Exception: Tubing passing through partitions or walls does not require striker barriers.
 5. Prohibited Locations:
 - a. Do not install natural-gas piping in or through circulating air ducts, clothes or trash chutes, chimneys or gas vents (flues), ventilating ducts, or dumbwaiter or elevator shafts.
 - b. Do not install natural-gas piping in solid walls or partitions.
- S. Use eccentric reducer fittings to make reductions in pipe sizes. Install fittings with level side down.
- T. Connect branch piping from top or side of horizontal piping.
- U. Install unions in pipes NPS 2 and smaller, adjacent to each valve, at final connection to each piece of equipment. Unions are not required at flanged connections.
- V. Do not use natural-gas piping as grounding electrode.
- W. Install strainer on inlet of each line-pressure regulator and automatic or electrically operated valve.
- X. Install pressure gage upstream and downstream from each line regulator. Pressure gages are specified in Division 15 Section "Meters and Gages."

3.4 VALVE INSTALLATION

- A. Install manual gas shutoff valve for each gas appliance ahead of corrugated stainless-steel tubing, aluminum, or copper connector.
- B. Install underground valves with valve boxes.

- C. Install regulators and overpressure protection devices with maintenance access space adequate for servicing and testing.
- D. Install earthquake valves aboveground outside buildings according to listing.
- E. Install anode for metallic valves in underground PE piping.

3.5 PIPING JOINT CONSTRUCTION

- A. Ream ends of pipes and tubes and remove burrs.
- B. Remove scale, slag, dirt, and debris from inside and outside of pipe and fittings before assembly.
- C. Threaded Joints:
 - 1. Thread pipe with tapered pipe threads complying with ASME B1.20.1.
 - 2. Cut threads full and clean using sharp dies.
 - 3. Ream threaded pipe ends to remove burrs and restore full inside diameter of pipe.
 - 4. Apply appropriate tape or thread compound to external pipe threads unless dryseal threading is specified.
 - 5. Damaged Threads: Do not use pipe or pipe fittings with threads that are corroded or damaged. Do not use pipe sections that have cracked or open welds.
- D. Welded Joints:
 - 1. Construct joints according to AWS D10.12/D10.12M, using qualified processes and welding operators.
 - 2. Bevel plain ends of steel pipe.
 - 3. Patch factory-applied protective coating as recommended by manufacturer at field welds and where damage to coating occurs during construction.

3.6 HANGER AND SUPPORT INSTALLATION

- A. Install seismic restraints on piping. Comply with requirements for seismic-restraint devices specified in Division 15 Section "Vibration and Seismic Controls for HVAC Piping and Equipment."
- B. Comply with requirements for pipe hangers and supports specified in Division 15 Section "Hangers and Supports."
- C. Install hangers for horizontal steel piping with the following maximum spacing and minimum rod sizes:
 - 1. NPS 1 and Smaller: Maximum span, 96 inches; minimum rod size, 3/8 inch.
 - 2. NPS 1-1/4: Maximum span, 108 inches; minimum rod size, 3/8 inch.
 - 3. NPS 1-1/2 and NPS 2: Maximum span, 108 inches; minimum rod size, 3/8 inch.

4. NPS 2-1/2 to NPS 3-1/2: Maximum span, 10 feet; minimum rod size, 1/2 inch.
5. NPS 4 and Larger: Maximum span, 10 feet; minimum rod size, 5/8 inch.

3.7 CONNECTIONS

- A. Connect to utility's gas main according to utility's procedures and requirements.
- B. Install natural-gas piping electrically continuous, and bonded to gas appliance equipment grounding conductor of the circuit powering the appliance according to NFPA 70.
- C. Install piping adjacent to appliances to allow service and maintenance of appliances.
- D. Connect piping to appliances using manual gas shutoff valves and unions. Install valve within 72 inches of each gas-fired appliance and equipment. Install union between valve and appliances or equipment.
- E. Sediment Traps: Install tee fitting with capped nipple in bottom to form drip, as close as practical to inlet of each appliance.

3.8 LABELING AND IDENTIFYING

- A. Comply with requirements in Division 15 Section "Mechanical Identification" for piping and valve identification.
- B. Install detectable warning tape directly above gas piping, 12 inches below finished grade, except 6 inches below subgrade under pavements and slabs.

3.9 FIELD QUALITY CONTROL

- A. Perform tests and inspections.
- B. Tests and Inspections:
 1. Test, inspect, and purge natural gas according to the International Fuel Gas Code and authorities having jurisdiction.
- C. Natural-gas piping will be considered defective if it does not pass tests and inspections.
- D. Prepare test and inspection reports.

3.10 INDOOR PIPING SCHEDULE

- A. Aboveground, branch piping shall be the following:
 1. Steel pipe with malleable-iron fittings and threaded joints.

- B. Aboveground, distribution piping 2" and larger shall be the following:
 - 1. Steel pipe with wrought-steel fittings and welded joints.

3.11 ABOVEGROUND MANUAL GAS SHUTOFF VALVE SCHEDULE

- A. Valves for pipe sizes NPS 2 and smaller at service meter shall be the following:
 - 1. One-piece, bronze ball valve with bronze trim.
- B. Valves for pipe sizes NPS 2-1/2 and larger at service meter shall be one of the following:
 - 1. Two-piece, full-port, bronze ball valves with bronze trim.
 - 2. Bronze plug valve.
 - 3. Cast-iron, nonlubricated plug valve.
- C. Distribution piping valves for pipe sizes NPS 2 and smaller shall be one of the following:
 - 1. One-piece, bronze ball valve with bronze trim.
- D. Distribution piping valves for pipe sizes NPS 2-1/2 and larger shall be one of the following:
 - 1. Two-piece, full-port, bronze ball valves with bronze trim.
 - 2. Bronze plug valve.
 - 3. Cast-iron, lubricated plug valve.

END OF SECTION 15195

SECTION 15510 - HEATING BOILERS ACCESSORIES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes a boiler controller, exhaust gas analyzer, and data transfer interface.

1.3 SUBMITTALS

- A. Product Data: Include performance data, operating characteristics, furnished specialties, and accessories.
- B. Source quality-control test reports.
- C. Field quality-control test reports.
- D. Operation and Maintenance Data: For boilers, components, and accessories to include in emergency, operation, and maintenance manuals.
- E. Warranty: Special warranty specified in this Section.

1.4 QUALITY ASSURANCE

- A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, Article 100, by a testing agency acceptable to authorities having jurisdiction, and marked for intended use.
- B. ASME Compliance: Fabricate and label boilers to comply with ASME Boiler and Pressure Vessel Code.
- C. ASHRAE/IESNA 90.1 Compliance: Boilers shall have minimum efficiency according to "Gas and Oil Fired Boilers - Minimum Efficiency Requirements."
- D. UL Compliance: Test Boilers for compliance with [UL 726, "Oil-Fired Boiler Assemblies."] [UL 726, "Oil-Fired Boiler Assemblies" and UL 795, "Commercial-Industrial Gas Heating Equipment."] [UL 795, "Commercial-Industrial Gas Heating Equipment."] Boilers shall be listed and labeled by a testing agency acceptable to authorities having jurisdiction.

1.5 COORDINATION

- A. Coordinate size and location of existing equipment. Install new controllers with proper service clearance.

1.6 WARRANTY

- A. 1 year parts and labor.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. Auto Flame or equal by:
 - 2. Cleaver Brooks.
 - 3. Prior approved equal.

2.2 BOILER CONTROLLER

- A. Provide a fully integrated "Micro Modulation Controller" that will be fully capable of fuel/air ratio control throughout the entire firing range of the burner, such that no mechanical linkages are required for operating the combustion air inlet damper and fuel flow control valves. The control for the specified burner and selected fuel(s) shall include all necessary interface wiring, software and hardware for a complete fuel/air metering and flame safeguard system. The system will be easily programmable with the flexibility of optimizing combustion quality throughout the load range while ensuring the boiler outlet pressure to within 1.5 PSI of set point (or the boiler outlet temperature to within 10F of set point).
- B. The "Micro Modulation Controller" will be preprogrammed to allow firing on up to four independent fuel curves. Each fuel/air ratio curve will be commissioned to enable firing of different fuels, over capacity or reduced capacity firing as required for the application. Required temperature/pressure set point will be adjustable locally from the control increase/decrease push buttons or remotely by the use of the chosen BMS using MODBUS protocols. Required temperature/pressure can be locked locally or through a PC/BMS.
- C. The system shall include the panel mounted control module containing a micro computer and power supply and shall include a display panel with tactile key pad selection, data display and status indication all protected beneath a tamper proof plastic cover and metal housing. The system shall be complete to control the fuel /air ratios near stoichiometric conditions and have 100% repeatability throughout the firing range.

- D. Valve Proving - Valve proving pressure sensors are specified and must be installed utilizing a graphical display of Main Fuel Shutdown Valves and Vent Valve during the Valve Proving Sequence. In addition this display will indicate commissioned and on line pressures as well as high and low limit pressure settings.
- E. Leak Testing - In conjunction with the Valve Proving ability, gas shutdown and vent valves will be tested for any leakage each time an automatic recycle is performed. In the event of any gas leakage detection the burner management system will immediately lockout and prevent the burner firing sequence to start.
- F. Combustion Air Sensor - Combustion air proving pressure sensor is specified and must be installed allowing a graphical display to indicate commissioned and on line pressures.
- G. Self Adaptive UV Flame Sensing Scanner - This will monitor the minimum required flame signal strength as set in the system options and will adjust the sampling frequency of the UV circuitry to give a mean signal slightly in excess of minimum. By this function the life expectancy of the UV bulb shall be extended and reliability increased.
- H. Pre-ignition purge airflow rate shall be no less than 100% of the maximum firing rate airflow. Micro processor interlocks shall be provided to continuously monitor and prove airflow at all times during purge cycles and operation.
- I. Electronic safety control shall be interlocked with a scanner signal providing continuously monitored and verified flame signal intensity by detection of ultraviolet radiation.
- J. In place of mechanical linkages and cams, the system will incorporate direct drive servomotors for the control of combustion air and fuel. The position of each motor will be monitored by a voltage dividing system enabling digitised position information to be encoded into the controls memory. The relative positions of the air and fuel servomotors will be constantly and automatically checked by the system at a rate of 50 times per second during purge and throughout the firing range.
- K. A full three term infinitely adjustable P.I.D. load control package shall be included to provide control set point accuracy within 1.5 PSI via a signal from a pressure sensor.
- L. A non-linkage fuel flow control valve shall be used for the precise control and metering of fuel input to the burner. Fuel valves will be designed for dual fuel assembly and common servo motor drive when applicable.
- M. The controller shall have a non-volatile memory to retain programs and data received in case of power interruptions. This data can be downloaded from the system for storage and also uploaded into the unit.
- N. The front of the panel-mounted control will consist of a large ¼ VGA LCD screen providing easy to read numeric and graphical information. Separate displays will be individually selectable for the specific application to provide continuously updated information as follows:

1. Display Status – on/off differential, hours run/number of start-ups, fuel fired, percentage firing rate, required temperature/pressure, actual temperature/pressure and software versions installed.
 2. Micro Modulation - degrees angular position of servo motors for channels 1, 2, 3 and 4. Analogue input signals for channels 5 and 6 (VFD channels). Channels can be labeled to reflect channel control. Designated O₂, CO₂ and CO Trim Channel (damper trim or VFD trim).
 3. Exhaust Gas Analysis - on Line Values of O₂, CO₂, CO, NO exhaust gas temperature, ambient temperature, differential temperature and efficiency. The system will provide comparison of actual online values versus original commissioned values and will be displayed on demand either locally or remotely via MODBUS/Metasys protocols.
 4. Lead/Lag (Sequencing) Status - boiler I.D. number, lead boiler designation, reduced set point, lag/standby firing sequence and current boiler status.
 5. Fuel Metering – graphical display of the fuel flow metering including gas valve and air damper position, calorific value of the fuel, online fuel consumption for all fuels being fired and totalized fuel consumption for each fuel curve commissioned.
 6. Variable Speed - vertical bar chart comparison display of analogue input and output from VFD on channels 5 and 6. Vertical bar chart display of percentage firing rate and comparison between commissioned and actual wind box air pressure.
 7. Flame Safeguard Graphical display of current Flame Safeguard Sequence Logic with indication of current status showing:
 - a. Flame Intensity Signal Strength for Flame
 - b. Post Purge Time and actual position in cycle
 - c. Pre Purge Time and actual position in cycle
 - d. Combustion Air Damper / VFD Speed Position
 - e. Current Firing Rate Status
 - f. Main Fuel Valve Status (Open or Closed)
 - g. Pilot Fuel Valve Status (Open or Closed)
 - h. Spark Ignition Status
 - i. Combustion Air Fan (Running or Standby)
 - j. Lockout or Run Status Message
 - k. Lockout Reset Capability
 - l. First Out Annunciation status
 - m. Lockout History - display of the last 16 annunciated limit circuit lockouts with description of lockout, time and date occurred and reset time and date.
 8. Water Level Information – including a virtual gauge glass to indicate the water level position, feed water valve position (angular and percentage), automatic bottom blow down time and number of occurrences, steam flow metering and TDS management.
- O. The controller will be capable of setting commissioned options and parameters to suit the specific application including but not limited to the following:
1. Designation of boiler operating range
 2. Adjustable burner modulating ramp up speed

3. Intelligent boiler sequencing (lead/lag)
 4. External modulation control
 5. Automatic Cold Start (warm up facility from cold) routines to prevent thermal shock or excessive condensation
 6. Alarm output signal
 7. Adjustable pilot and main flame proving time
 8. Adjustable flame signal strength threshold
 9. Fuel valve and vent valve proving with adjustable high and low gas pressure limits
 10. Adjustable wind box pressure limits
 11. Password settings to prevent unauthorised access to commissioning routines. These passwords must be passed to the clients chosen engineer on completion
 12. Independent adjustable Proportional Band, Integral Time and Derivative (PID)
- P. The controller will be capable of making changes to various non-safety options and parameters online, whilst the burner is firing or in the standby state without having to reset the controller.

2.3 EXHAUST GAS ANALYSIS

- A. EGA (Exhaust Gas Analyser)- Provide a fully integrated "Exhaust Gas Analysis Trim System (EGA)". The EGA will be data linked to the "Micro Modulation Controller" specified herein to continuously measure and display O₂, CO₂, CO, NO, Exhaust Gas Temperature, and Combustion Efficiency. The system will provide the necessary control signals via the "Micro Modulation Controller" to automatically adjust the air damper servo motor position (or VFD if selected) ensuring that the commissioned values of O₂, CO₂ and CO are maintained throughout the burner firing rate regardless of variations in stack pressure, fuel pressure boiler house temperature or barometric conditions. O₂ trim only will not be acceptable. A calculated CO₂ value will not be acceptable.
- B. In addition to the data link between the EGA and MM controller the EGA will have auxiliary contacts for remote indication of combustion analysis via six 4 to 20 mA signals to include O₂%, CO₂%, CO ppm, NO ppm, Exhaust temp, Eff.
- C. As a complete system the EGA will be supplied with a stack probe and thermocouple with sample tubing and armored cable. Both EGA and the stack probe will be supplied with internal removable/serviceable filters.
- D. The EGA is supplied with a local display. This will show the combustion readings, and EGA status. Software and hardware design will permit the replacement of factory calibrated gas sensor cells by the keypad on the EGA using a 15 digit code without the use of test gases.
- E. The EGA will be supplied complete with integral components for safe, reliable service including an onboard gas sample chiller block with condensate solenoid drain valve and sample vacuum pump.

- F. In conjunction with software communications between the EGA and MM controller the following options and parameters will be available for commissioning the complete MM/EGA system to suit the specific application requirements.
 - 1. Automatic carry forward of relative trim position
 - 2. Upper offset limits for O₂, CO₂, CO, NO and exhaust temperature
 - 3. Lower offset limits for O₂, and CO₂
 - 4. Absolute limits for O₂, CO₂ and CO
 - 5. Trim threshold values
 - 6. Trim delay to prevent sampling during boiler warm up periods
 - 7. Adjustable combustion gas residence time
 - 8. Adjustable display reading update rate
 - 9. Adjustable self-calibration time
- G. The EGA software will incorporate automatic self-calibration and gas sensor cell integrity checking on each burner recycle.
- H. Internal indicating lights will display continuously the current status and reliability of the gas sensor cells.

2.4 DATA TRANSFER INTERFACE

- A. Provide a fully integrated "Data Transfer Interface (DTI)", allowing the client to monitor the individual boiler combustion and efficiency. The DTI will be data linked to the "Micro Modulation Controller(s)" specified herein to continuously update, retrieve and make available for remote display and control the information stored in memory locally at the burner control panel as follows:
 - 1. Remote enable/disable control
 - 2. Digital input/output signals via digital modules
 - 3. Analogue input/output via analogue modules
 - 4. Control relay status
 - 5. Remote set point change
 - 6. Hand and Low Fire Hold status
 - 7. Lead boiler status
 - 8. Remote lead boiler selection
 - 9. On Line/Off Line status
 - 10. Load index, firing rate in percentage
 - 11. MM error numbers
 - 12. Burner lockout details
 - 13. EGA monitoring O₂, CO₂, CO, NO, exhaust gas temperature and efficiency
 - 14. Fuel Flow Metering
 - 15. Servomotor angular positions (Fuel/Air/Auxiliary Air, e.t.c.)
 - 16. Number of MM units on the system
 - 17. Full lockout and lockout reset (time and date) history
- B. The DTI unit will be provided with EPROM MODBUS approved protocol installed with all reference addresses provided and ready for interface with the chosen BMS control room computer system. Remote connection to the DTI will be via RS 232 direct, RS 232 modem, RS 422 direct or RS485 (Johnson Metasys protocol).

- C. Provide Windows 2000 compatible software for DTI communication. The software must have two modes of operation; local control and remote monitoring via a modem. A data log must be automatically created containing readings at five-minute intervals of all the system values. Dedicated screens will be individually selectable for the specific application to provide updated information as follows:
1. Plant Supervisor Setup
 2. Plant Manager Setup
 3. MM Module Identification Tag
 4. Change boiler(s) Set Point
 5. On-line MM Information: Firing Status, Sequencing Status, Load Control, Valve Positions, Inverter Channel Output, EGA Data, Lockout Data, Burner History
 6. Firing Rate Chart and Sequence Status
 7. Data Logging Chart of Actual Values
 8. Mk. 6 Commissioning Data Report
 9. EGA Data Logging Chart of O₂, CO₂, CO, (NO)
 10. Main Digital Input/Output Screen
 11. Digital Output Control and Alarm List
 12. Digital Input Control and Alarm List
 13. Digital Alarm Setup Screen
 14. Digital Logging Charts
 15. Main Analogue Input/Output Screen
 16. Analogue Output Control and Alarm List
 17. Analogue Input Control and Alarm List
 18. Analogue Input Setup Screen
 19. Analogue Data Logging Chart Based on 4-20 mA I/O Signals
- D. Indicating lights will be provided on the DTI faceplate to prove receive and transmission of data, power on and system OK.

2.5 FACTORY MANUFACTURED CONTROL PANEL

- A. A factory built NEMA4 (IP65) factory pre-wired control panel would be supplied with a hinged, lockable door. The cabinet will be designed for mounting separate from the burner to comply with site requirements. The control panel shall include the following:
1. Individual lights with nameplates as follows
 - a. Power on
 - b. Fuel on
 - c. Load demand
 - d. Flame failure
 2. Control switches as follows (as a minimum requirement):
 - a. On/off
 - b. Hand/Auto/Low Flame Hold
 - c. Fuel Select
 - d. Flame Failure Reset

e. Reset

- B. Control panel will house all control and switchgear to safely operate the forced draught combustion fan, oil pump, run and fail indication lamps etc. The appointed contractor should make themselves aware of any other control panel components required to meet the client's current and future requirements.
- C. Control panels shall be provided with detailed wiring diagrams. Copies of the wiring diagrams should be stored within the panel for use on site. Prior to manufacture, copies of the wiring diagrams should be made available for review and comment. The panel manufacturer shall ensure that all of the clients control requirements are met in full when designing and building the control panel, including any communications with any external boiler house controls.
- D. Enclosure of the control panel shall be finished using industrial powder coat to match burner control.
- E. Control panel shall be factory tested prior to installation on site.

2.6 DESKTOP COMPUTER

- A. Furnish to the owner, a desktop computer or access all boiler controllers. Additionally, furnish the same software and licenses as required to interface with the controllers. Coordinate all specifics and requirements with owner prior to furnishing.
- B. The desktop computer shall consist of the following minimum standards.
 - 1. 3.0 GHz Pentium 4
 - 2. 40 GB Hard Drive
 - 3. 1.0 GB RAM
 - 4. 17" Monitor
 - 5. 16 MB Video Card
 - 6. 8 x DVD ROM
 - 7. 56k V.90 Internal Modem
 - 8. 10/100 Network Adapter
 - 9. Warrantee
 - a. 3 year on-site warrantee if mail ordered.
 - b. 3 year warrantee if local supplier.
 - 10. Approved Manufacturers
 - a. Dell
 - b. HP/Compaq
 - c. Prior approved equal.

2.7 VALVES

- A. Provide new gas and oil control valves.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Before controller installation, examine roughing-in for sizes and locations, and piping and electrical connections to verify actual locations, sizes, and other conditions affecting controller performance, maintenance, and operations.
 - 1. Final controller locations indicated on Drawings are approximate. Determine exact locations before roughing-in for piping and electrical connections.
- B. Examine mechanical spaces for suitable conditions where controllers will be installed.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 GAS VALVES

- A. Remove and replace gas and oil valves and associated control assemblies.

3.3 SEQUENCING/LEAD LAG

- A. Data Transfer Interface (DTI) shall be capable of coordinating full boiler plant functionality between associated systems (boilers, deaerator, surge tank, blowdown, fuel oil systems, etc...).
- B. The DTI shall perform a load demand lead/lag (sequencing) control based on pressure header drop scheme using boiler # 1 as the "lead" unit and boiler's # 2 and # 3 as the "stand-by/lag" units to be operated under failure and in conjunction with the lead boiler.
- C. The DTI shall alternate each boiler to change their lead and stand-by assignments based on a 7 day equal run time basis. Allow lead/stand-by functionality to be applied either in automatic mode by the DTI and manually by the user without disturbance to system process and functionalities.
- D. Load demand sequencing control scheme shall be configured as follows:
 - 1. Upon a boiler plant startup command via Government coordinated automatic schedule or user manual command, the DTI shall verify system head pressure and initiate the load sequencing control loop to maintain system setpoint.
 - 2. On a decrease of system head pressure from setpoint, the DTI shall energize lead boiler # 1 and increase firing rate to maintain setpoint.
 - 3. When lead boiler reaches 95 percent (or user definable value) of it's capacity, the DTI shall energize lag boiler.
 - 4. When lag boiler begins to produce steam at the specified temperature and pressure, the DTI shall force lead boiler to reduce it's capacity until both boilers are operating at the same capacity.

5. When both boilers are operating together and load reduces to 85 percent (or user definable value) of the total capacity, the DTI shall de-energize lag boiler and lead boiler shall increase in capacity to accommodate load.
6. The position assignment for the boilers shall change once every seven days as follows:
 - a. The lead boiler shall become the lag boiler.
 - b. The lag boiler shall become the stand-by boiler.
 - c. The stand-by boiler shall become the lead boiler.
- E. The lead/lag operation does not require the use of the DTI, and can operate with just the controllers. In this operation the lead boiler selection requires a lead boiler input from a remote lead boiler select switch.
- F. Cold Start Routine: If the boiler temperature/pressure is at or below 30% of the target pressure/temperature then the burner would be held at low flame. If the boiler is at or below 60% of its target temperature/pressure then the burner firing rate would be held at 50% firing. When the boiler temperature/pressure exceeds the proportional band and offset in the PID philosophy then the burner would revert to normal PID load control. If the boiler temperature/pressure does not exceed the 30%/60% thresholds for a user-definable period of time then the MM will move to the next band.

3.4 FIELD QUALITY CONTROL


- A. Perform tests and inspections and prepare test reports.
 1. Manufacturer's Field Service: Engage a factory-authorized service representative to inspect components, assemblies, and equipment installations, including connections, and to assist in testing.
- B. Remove and replace malfunctioning units and retest as specified above.
- C. Occupancy Adjustments: When requested within 12 months of date of Substantial Completion, provide on-site assistance in adjusting system to suit actual occupied conditions. Provide up to two visits to Project during other than normal occupancy hours for this purpose.
- D. Performance Tests:
 1. Manufacturer's Field Service: Engage a factory-authorized service representative to inspect component assemblies and equipment installations, including connections, and to conduct performance testing.
 2. Boilers shall comply with performance requirements indicated, as determined by field performance tests. Adjust, modify, or replace equipment in order to comply.
 3. Perform field performance tests to determine the capacity and efficiency of boilers.
 4. Repeat tests until results comply with requirements indicated.
 5. Provide analysis equipment required to determine performance.

6. Provide temporary equipment and system modifications necessary to dissipate the heat produced during tests if building systems are not adequate.
7. Notify Architect in advance of test dates.
8. Document test results in a report and submit to Architect.

3.5 DEMONSTRATION

- A. Engage a factory-authorized service representative to train Owner's maintenance personnel to adjust, operate, and maintain boilers.
- B. Provide copies of the option and parameter settings, as well as fuel curve settings, ega values, and ega trim valves for the O&M Manuals. Coordinate with Section 15010.

END OF SECTION 15510

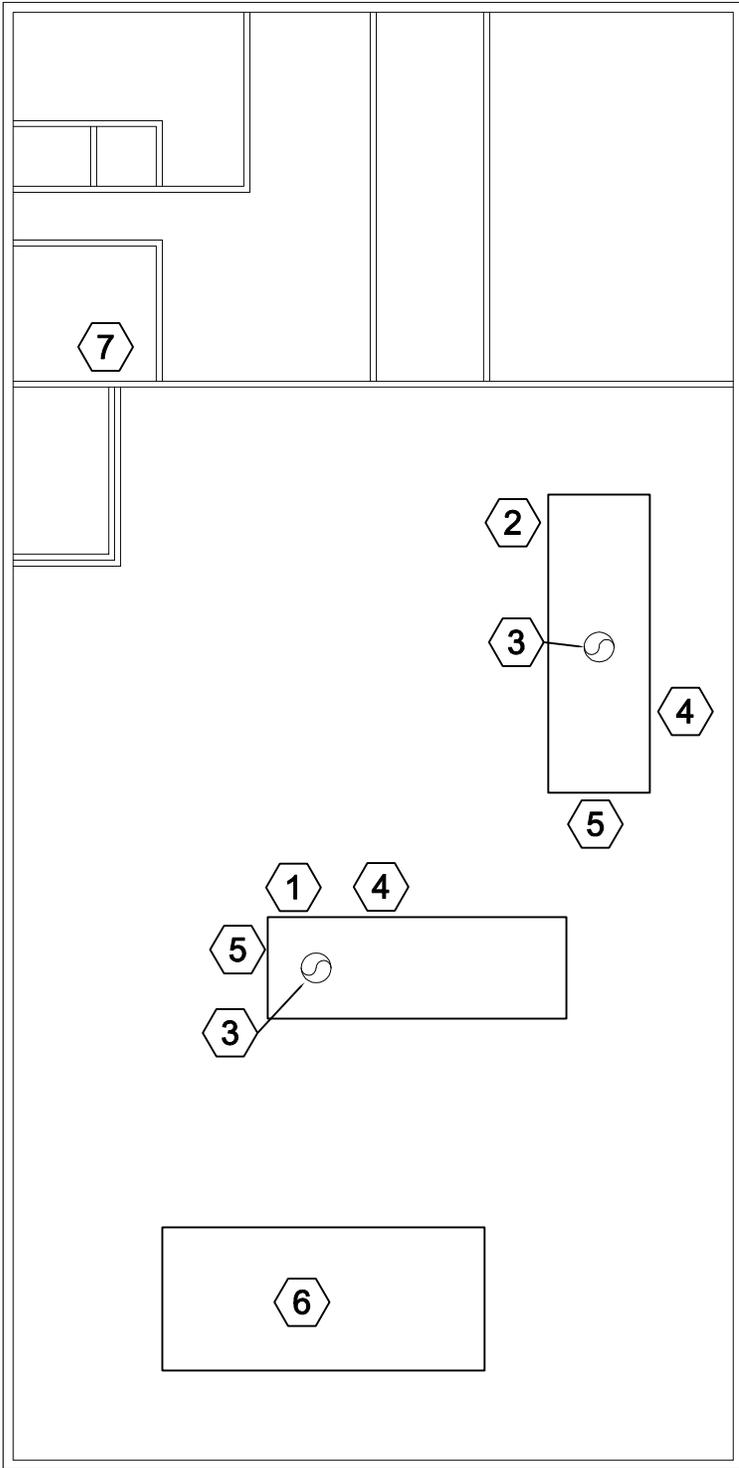

SHEET NOTES:

- 1 EXISTING BOILER B-1.
- 2 EXISTING BOILER B-3.
- 3 PROVIDE FLUE GAS PROBE IN EXISTING STACK.
- 4 PROVIDE NEW BOILER CONTROLLER AND NEW PANEL. COORDINATE EXACT LOCATION WITH OWNER AND EXISTING CONDITIONS.
- 5 REMOVE EXISTING GAS AND OIL CONTROL VALVE ASSEMBLIES, INCLUDING ALL LINKAGE AND JACK SHAFTS. MOUNT GEARS ON ROTARY AIR DAMPER. REPLACE GAS AND OIL CONTROL VALVES. INTEGRATE NEW VALVES WITH NEW CONTROLLERS.
- 6 COIL FIRED BOILER BY OTHER CONTRACT.
- 7 PROVIDE NEW DESKTOP COMPUTER AT THIS APPROXIMATE LOCATION TO MONITOR CONTROLLERS THROUGH DATA TRANSFER INTERFACE. MOUNT DTI IN THE SAME ROOM AS THE PC.

GENERAL NOTES:

FIELD VERIFY EXACT SIZE AND LOCATION OF EXISTING CONDITIONS. COORDINATE LOCATION OF ALL NEW CONTROLS, ACCESSORIES, ETC. WITH OWNER AND EXISTING CONDITIONS. PROVIDE ALL NECESSARY COMPONENTS AND ACCESSORIES FOR COMPLETE AND FUNCTIONAL SYSTEM.

State of Utah
Department of Administrative Services



Division of Facilities
Construction & Management
4110 State Office Building
Salt Lake City, Utah 84114
Phone: (801) 538 - 3018
Fax: (801) 538 - 3267

Internet: <http://www.dfc.state.ut.us>



WHW
ENGINEERING INC.
PROFESSIONAL MECHANICAL ENGINEERING
1354 East 3300 South Suite 200
SALT LAKE CITY, UTAH 84106
(801) 466-4021, FAX 466-8536
EMAIL: excellence@whw-engineering.com

**CUCF BOILER
CONTROLS**

DFCM# 06168110

ME101

BOILER ROOM PLAN

SCALE: 1/16" = 1'-0"

