



State of Utah

JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

Department of Administrative Services

Kim Hood
Executive Director

Division of Facilities Construction and Management

David G. Buxton
Director

ADDENDUM 1

Date: 17 March 2008

To: Contractors

From: Darrell Hunting, DFCM – Project Manager

Reference: First Floor Remodel – Student Service Center – Phase II
Weber State University – Ogden, Utah
DFCM Project No. 07349810

Subject: **Addendum No. 1**

Pages	Cover Page	1 page
	<u>Architect's Addendum</u>	<u>3 pages</u>
	Total	4 pages

Note: This Addendum shall be included as part of the Contract Documents. Items in this Addendum apply to all drawings and specification sections whether referenced or not involving the portion of the work added, deleted, modified, or otherwise addressed in the Addendum. Acknowledge receipt of this Addendum in the space provided on the Bid Form. Failure to do so may subject the Bidder to disqualification.

1.1 SCHEDULE CHANGES – No Schedule changes

1.2 GENERAL – P+A Architect – Specifications and Drawings.

ADDENDUM NO. 1 Phase II

Date: March 14th, 2008

PROJECT:

Weber State University
Phase II
Student Services First Floor Remodel
Ogden, Utah
DFCM Project No. 07349810

ARCHITECT:

P+A ARCHITECTS
821 EAST KENSINGTON AVENUE
SALT LAKE CITY, UT 84105

The original Contract Documents issued for the above noted project are amended as noted in this Addendum. It shall be the sole responsibility of the bidder to appropriately disseminate this information to all concerned prior to the assigned bid time and date, and to coordinate the Addendum with the Contract Documents.

This Addendum consists of a total of Two (2) 8 1/2"x11" documents, including this document.

If there are still unresolved questions after examining this addendum, please submit those questions via telephone or facsimile as soon as possible so that an addendum can be issued to clarify those issues in a timely manner.

Architectural:


1. See attached drawing No1 indicating cable tray location. General contractor shall provide data/phone outlet boxes and conduits at locations as shown on electrical drawings. Communications conduits shall be run from data/phone boxes in walls and above ceiling and terminated at a point within 1'-0" of new cable tray location. New cable tray is not part of phase II construction.
2. The owner will be providing new rubber base in the following rooms:
 - a. RECEPTION 100
 - b. OFFICE 101
 - c. RECEPTION 102
 - d. OFFICE 103
 - e. OFFICE 104
 - f. HALL 105
 - g. OFFICE 106
 - h. OFFICE 107.

The general contractor will be required to replace wood base and chair railing at locations shown on drawing A-FP101, as pre reference note #5. Wood base and chair railing shall match the buildings existing wood base and chair railing. Existing wood base and chair railing may be reused as noted on drawing A-DP101 reference note #7. It is the general

contractors responsibility to verify existing amounts as per general note #5 on drawing A-DP101 and general note #6 on drawing A-FP101.

3. The general contractor will be required to bag all smoke detectors to protect from dust prior to construction.

End of Addendum 1

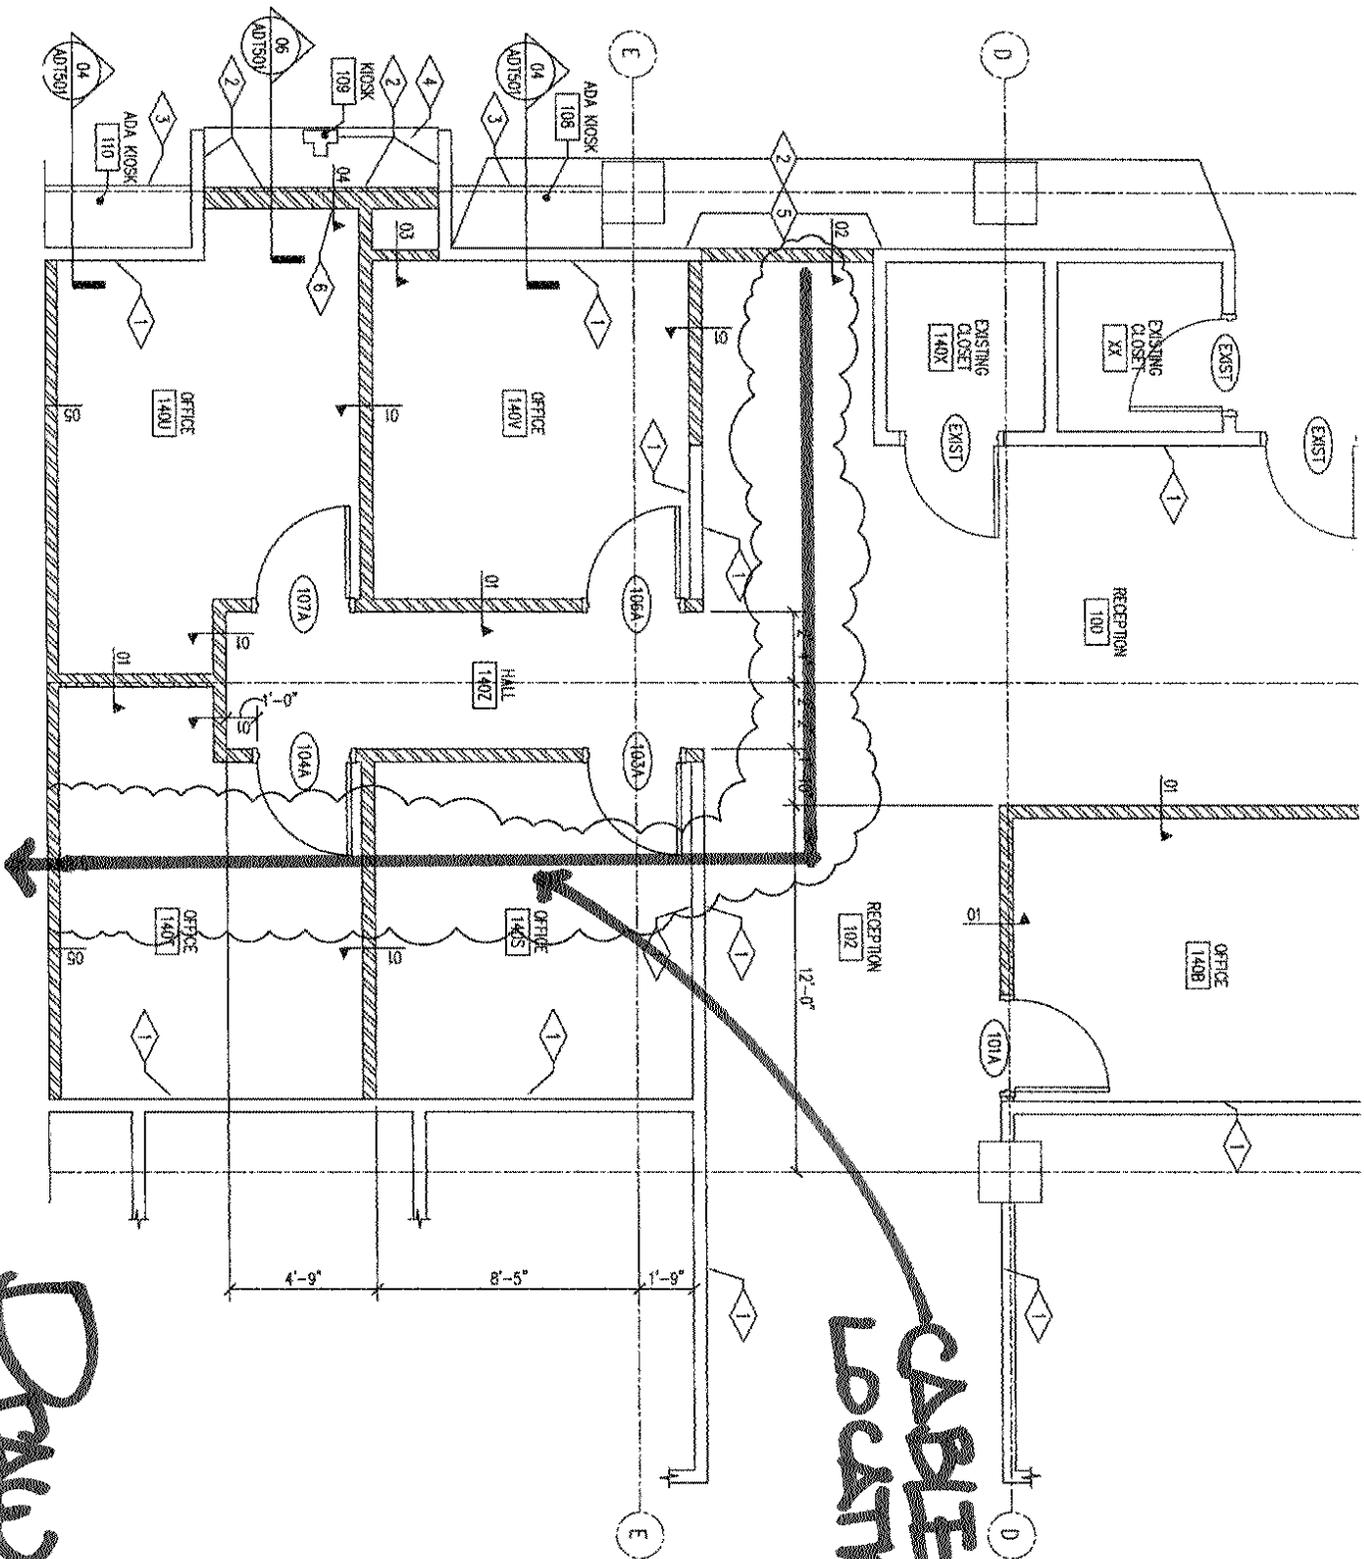

**CABLE TRAY
LOCATION**

**#1
DRAWING**