



State of Utah

JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

Department of Administrative Services

KIMBERLY K. HOOD
Executive Director

Division of Facilities Construction and Management

DAVID G. BUXTON
Director

ADDENDUM #1

Date: October 13, 2008

To: Contractors

From: Vic Middleton, Project Manager, DFCM

Reference: Tie Fork Visitor Service Center
Utah Department of Transportation - , Utah
DFCM Project No. 08264900

Subject: **Addendum No. 1**

Pages	<u>Addendum</u>	3 pages
	Total	3 pages

Note: *This Addendum shall be included as part of the Contract Documents. Items in this Addendum apply to all drawings and specification sections whether referenced or not involving the portion of the work added, deleted, modified, or otherwise addressed in the Addendum. Acknowledge receipt of this Addendum in the space provided on the Bid Form. Failure to do so may subject the Bidder to Disqualification.*

While we contend that SB220 should only be potentially applicable to a contract issued after the effective date of said bill, this is to clarify that for purposes of this contract, regardless of the execution or effective dates of this contract, the status of Utah Law and remedies available to the State of Utah and DFCM, as it relates to any matter referred to or affected by said SB220, shall be the Utah law in effect at the time of the issuance of this Addendum.

- 1.1 **SCHEDULE CHANGES** – There are no changes to the project schedule.
- 1.2 **GENERAL** – Specifications and map.

Utah!
Where ideas connect

Tie Fork Visitors Service Center Demolition of Existing Structures

DFCM Project # 08264000

ADDEMDUM #1

1: Utilities, The gas at the site was on a propane tank. The tank has been removed and lines are remaining on the site. The water was by a well or several well's. The buried water line is remaining and it will not be an issue to dig it up where found. The power has been disconnected from the buildings. There are several light & power poles standing on the site. The poles are to remain.

2: The county road running north to south through the site is staying open during the demolition and the surface material is to remain as is.

3: Any septic tanks encountered during the demolition are to be pumped and removed and filled in. The leach fields can remain on site.

4: Debris from the wet land area to the West of the site was being cleaned out during the pre-bid walk. We estimated three loads to be placed in the boundaries of the demolition. During the pre-bid walk there was two end dump load already on site. This number has increased and the number of side dump loads that will have to be removed is now ten end dump loads estimated at approx. 150 cubic yards.

5: Boundaries of the demolition site.

North: wooden fence and t-post wire fence to include both fences.


South wooden fence to include the fence.

West: wooden stakes. Dividing line between wet-lands and demolition site.

East: wooden fence with the jog to the east to include the fence.

6: Hazardous survey included with this addendum. See attached

7: Site plan with boundaries of the demolition.

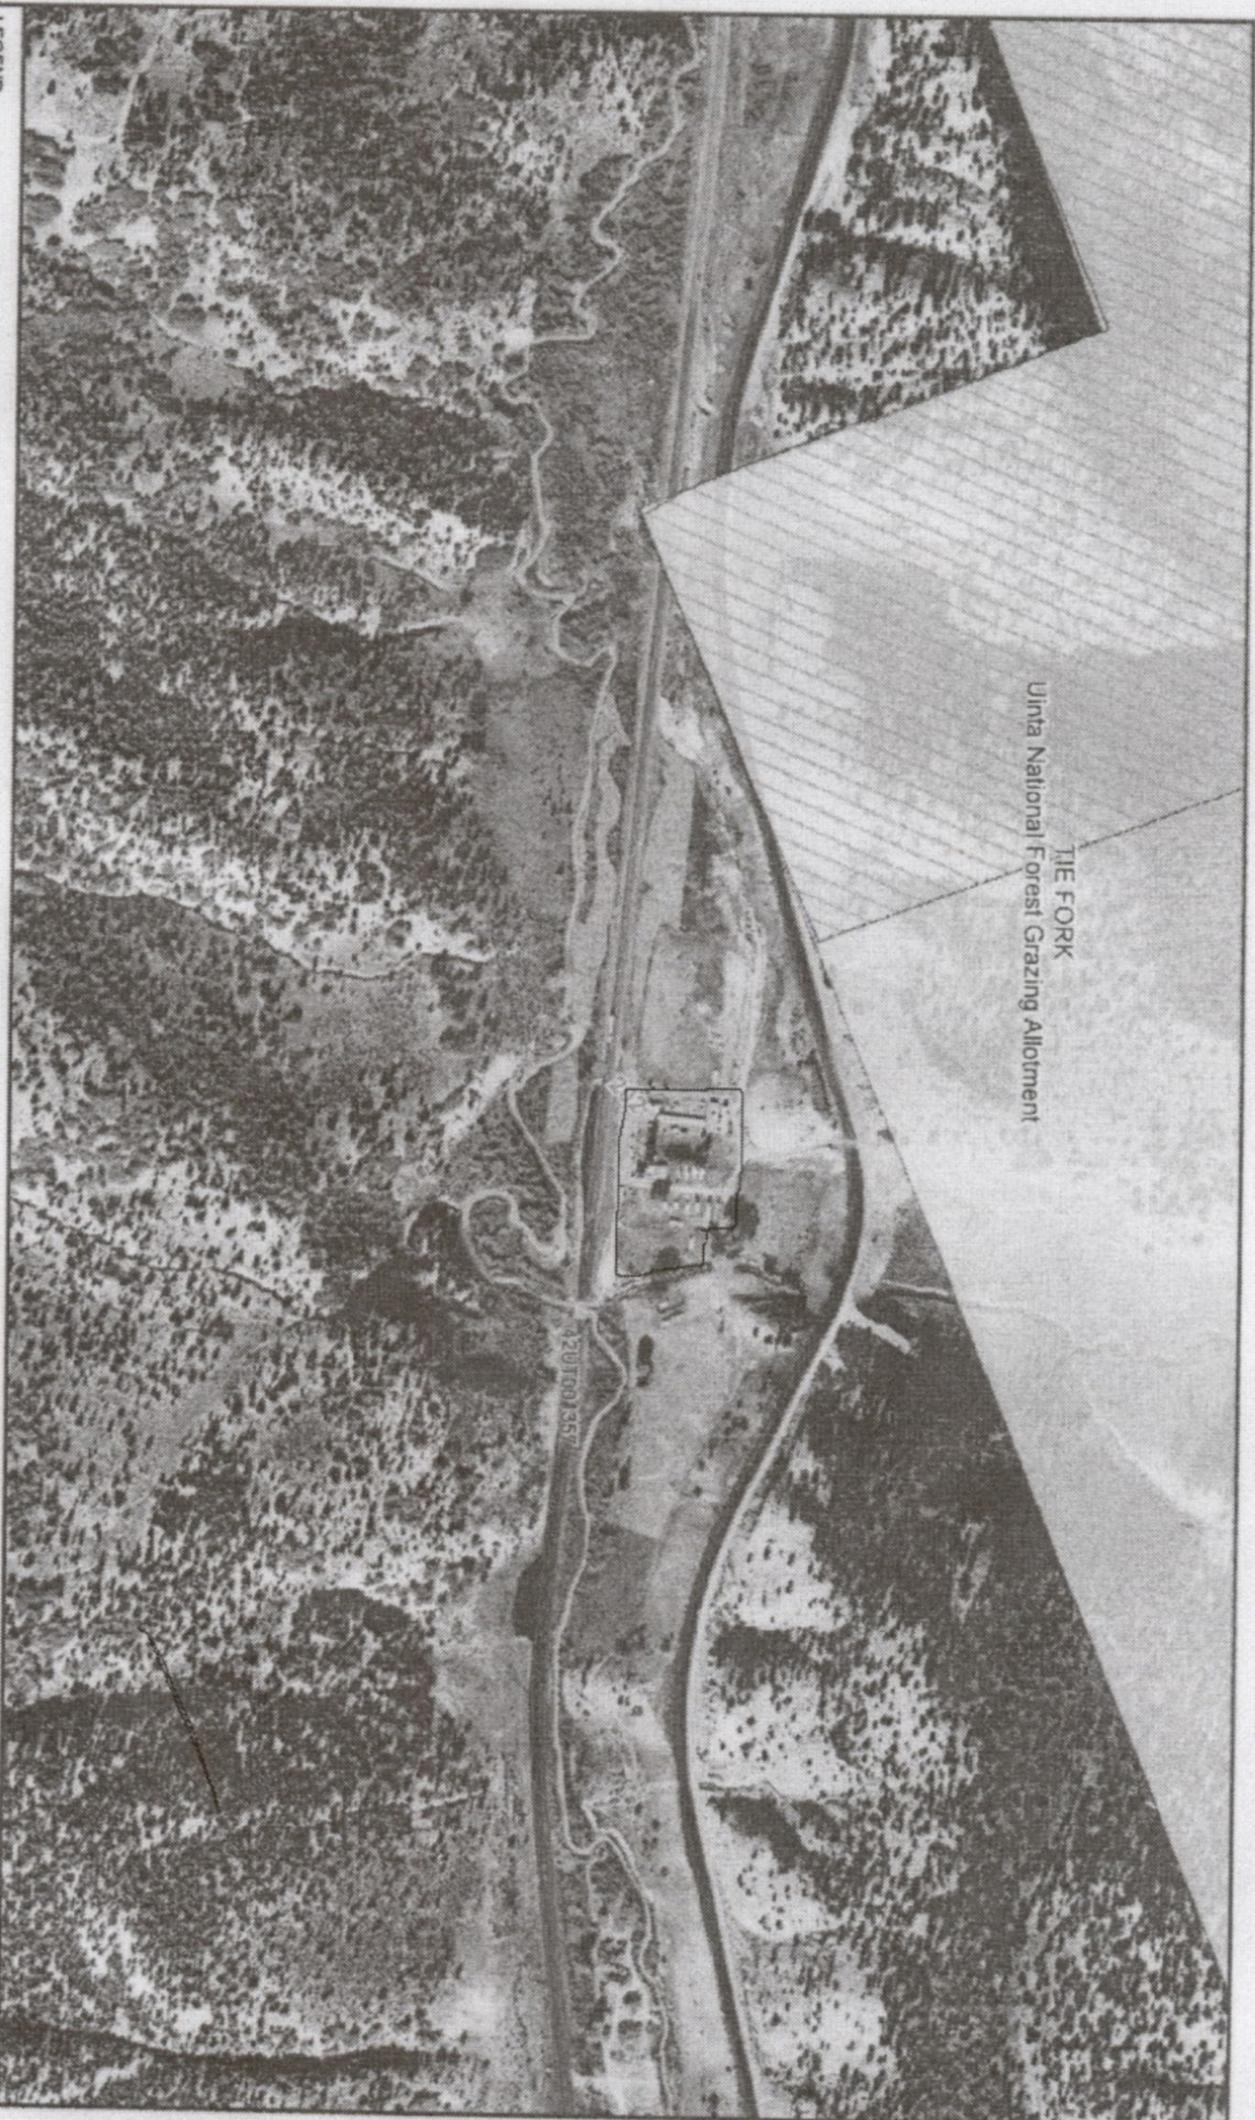

- LEGEND**
- Milepost
 - Archaeological Site Line
 - ▨ Archaeological Site Area
 - ▨ Delineated Wetlands
 - ▨ Uinta National Forest Grazing Allotment Boundaries
 - ▨ Forest Service Land

File: December 22, 2006, 11:11:33 AM
 C:\proj\0418_Archa_Fring_dms\workspace\p418\p418_Archa.dwg


US 6 - Sky View Area
Segment 6: MP 200.43-MP 203.42
 December 2006

0 415 830
 Feet

