



STATE OF UTAH - DEPARTMENT OF ADMINISTRATIVE SERVICES

**Division of Facilities Construction and Management**

**DFCM**

**MULTI-STEP BIDDING PROCESS  
FOR  
CONTRACTORS**

**Request For Solicitation For  
Construction Services**

**Stage II – Roofing Contractors Bidders List FY11**

**June 14, 2010**

**TECHNOLOGY BUILDING REROOF**

**SOUTHERN UTAH UNIVERSITY**

**CEDAR CITY, UTAH**

**DFCM Project No. 09257730**

Mesa Consulting Group

## TABLE OF CONTENTS

	<b>Page #</b>
Title Sheet	1
Table of Contents	2
Invitation to Bid	3
Stage II – Multi-Step Bidding Process	4
Stage II - Project Schedule	8
Bid Form	9
Bid Bond	11
Instructions and Subcontractors List Form	12
Contractor's Agreement	15
Performance Bond	20
Payment Bond	21
Certificate of Substantial Completion	22
General Contractor Performance Rating Form	

Technical Specifications:  
Drawings:

Current copies of the following documents are hereby made part of these contract documents by reference. These documents are available on the DFCM web site at <http://dfcm.utah.gov/StdDocs/index.html> “Standard Documents” – “Reference Documents I” – “Item 7. Supplemental General Conditions” or are available upon request from DFCM:

DFCM Supplemental General Conditions revised May 11, 2010 \*  
DFCM Supplemental General Conditions dated July 1, 2009 \*  
DFCM Supplemental General Conditions dated July 15, 2008  
DFCM General Conditions dated May 25, 2005

**\* NOTE: THE NEW SUPPLEMENTAL GENERAL CONDITIONS EFFECTIVE JULY 1, 2009 AND REVISED MAY 11, 2010 ADDRESSING HEALTH INSURANCE AND IMMIGRATION ARE REFERENCED AT THE LINK ABOVE.**

The Agreement and General Conditions dated May 25, 2005 have been updated from versions that were formally adopted and in use prior to this date. The changes made to the General Conditions are identified in a document entitled Revisions to General Conditions that is available on DFCM’s web site at <http://dfcm.utah.gov>

## **INVITATION TO BID**

**ONLY FIRMS PRE-QUALIFIED DURING STAGE I OF THE RFS ARE ALLOWED TO BID ON THIS PROJECT**

The State of Utah - Division of Facilities Construction and Management (DFCM) is requesting bids for the construction of the following project:

**Project Name: Technology Building Reroof – Southern Utah University – Cedar City, Utah**  
**DFCM Project No: 09257730**

**Project Description: Remove and dispose of the existing B.U.R tar and gravel roofing system. Install new metal flashings. Install new PVC single ply roofing system with a 20 Yr. NDL Warranty on the State of Utah form with a 90 mph wind warranty.**

**Construction Cost Estimate: \$165,000.00**

<b>Company</b>	<b>Contact</b>	<b>Fax</b>
Clarks Quality Roofing	Perry Clark	801-266-3692
Contract West Roofing	Craig Peters	801-943-0257
Conwest, Inc.	Jeff Rogers	815-550-1136
Kendrick Brothers Roofing	Brent Wood	801-731-2020
Perkes Roofing	Mark Perkes	801-627-1593
Redd Roofing Company	Kyle Redd	801-621-1540
Superior Roofing	Scott Handy	801-266-1522

The bid documents will be available on **Monday, June 14, 2010** in electronic format only on CDs from DFCM at 4110 State Office Building, Salt Lake City, Utah 84114, telephone 801-538-3018 and on the DFCM web page at <http://dfcm.utah.gov>. For questions regarding this project, please contact **Matt Boyer**, Project Manager, DFCM, at **801-541-0945**. No others are to be contacted regarding this project.

A **MANDATORY** pre-bid meeting and site visit will be held at **10:30 AM on June 16, 2010 at SUU Technology Building North Entrance**. All pre-qualified prime contractors wishing to bid on this project must attend this meeting.

Bids must be submitted by **4:00 PM on Wednesday, June 23, 2010** to DFCM, 4110 State Office Building, Salt Lake City, Utah 84114. Bids will be opened and read aloud in the DFCM Conference Room, 4110 State Office Building, Salt Lake City, Utah. Note: Bids must be received at 4110 State Office Building by the specified time. The contractor shall comply with and require all of its subcontractors to comply with the license laws as required by the State of Utah.

A bid bond in the amount of five percent (5%) of the bid amount, made payable to the Division of Facilities Construction and Management on DFCM's bid bond form, shall accompany the bid.

The Division of Facilities Construction & Management reserves the right to reject any or all bids or to waive any formality or technicality in any bid in the interest of the State.

DIVISION OF FACILITIES CONSTRUCTION AND MANAGEMENT  
JOANNA REESE, CONTRACT COORDINATOR  
4110 State Office Bldg., Salt Lake City, Utah 84114

## **STAGE II - MULTI-STEP BIDDING PROCESS**

**ONLY FIRMS PRE-QUALIFIED DURING STAGE I OF THE RFS ARE ALLOWED TO BID ON THIS PROJECT**

### **1. Invitational Bid Procedures**

The following is an overview of the invitational bid process. More detailed information is contained throughout the document. Contractors are responsible for reading and complying with all information contained in this document.

Notification: DFCM will notify each registered pre-qualified firm (via fax or e-mail) when a project is ready for Construction Services and invite them to bid on the project.

Description of Work: A description of work or plans/specifications will be given to each contractor. If required, the plans and specifications will be available on the DFCM web page at <http://dfcm.utah.gov> and on CDs from DFCM, at 4110 State Office Building, Salt Lake City, Utah 84114.

Schedule: The Stage II Schedule shows critical dates including the mandatory pre-bid site meeting (if required), the question and answer period, the bid submittal deadline, the subcontractor list submittal deadline, etc. Contractors are responsible for meeting all deadlines shown on the schedule.

Mandatory Pre-Bid Site Meeting: If a firm fails to attend a pre-bid site meeting labeled “Mandatory” they will not be allowed to bid on the project. At the mandatory meeting, contractors may have an opportunity to inspect the site, receive additional instructions and ask questions about project. The schedule contains information on the date, time, and place of the mandatory pre-bid site meeting.

Written Questions: All questions must be in writing and directed to DFCM’s project manager assigned to this project. No others are to be contacted regarding this project. The schedule contains information on the deadline for submitting questions.

Addendum: All clarifications from DFCM will be in writing and issued as an addendum to the RFS. Addenda will be posted on DFCM’s web site at <http://dfcm.utah.gov>. Contractors are responsible for obtaining information contained in each addendum from the web site. Addenda issued prior to the submittal deadline shall become part of the bidding process and must be acknowledged on the bid form. Failure to acknowledge addenda may result in disqualification from bidding.

Submitting Bids: Bids must be submitted to DFCM 4110 State Office Building, Salt Lake City, Utah 84114 by the deadline indicated on the schedule. Bids submitted after the deadline will not be accepted. Bids will be opened at DFCM on the date, time, and place indicated on the schedule.

Subcontractors List: The firm selected for the project must submit a list of all subcontractors by the deadline indicated on the schedule contained in this document.

Pre-qualified List of Contractors: Contractors shall remain on DFCM’s list of pre-qualified contractors provided: (a) they maintain a performance rating of 3.5 or greater on each project, (b) they are not suspended for failure to comply with requirements of their contract, (c) the firm has not undergone a significant reorganization involving the loss of key personnel (site superintendents, project managers, owners, etc.) to a degree such that the firm no longer meets the pre-qualification requirements outlined in Stage I, (d) the financial viability of the firm has not significantly changed, and (e) the firm is not otherwise disqualified by DFCM. Note: If a contractor fails to comply with items (a) through (e) above,

they may be removed from DFCM's list of pre-qualified contractors following an evaluation by a review committee. Contractors will be given the opportunity to address the review committee before a decision is made. Pre-qualified contractors are ONLY authorized to bid on projects within the discipline that they were originally pre-qualified under.

**2. Drawings and Specifications and Interpretations**

Drawings, specifications and other contract documents may be obtained as stated in the Invitation to Bid. If any firm is in doubt as to the meaning or interpretation of any part of the drawings, specifications, scope of work or contract documents, they shall submit, in writing, a request for interpretation to the authorized DFCM representative by the deadline identified in the schedule. Answers to questions and interpretations will be made via addenda issued by DFCM. Neither DFCM or the designer shall be responsible for incorrect information obtained by contractors from sources other than the official drawings/specifications and addenda issued by DFCM.

**3. Product Approvals**

Where reference is made to one or more proprietary products in the contract documents, but restrictive descriptive materials of one or more manufacturer(s) is referred to in the contract documents, the products of other manufacturers will be accepted, provided they equal or exceed the standards set forth in the drawings and specifications and are compatible with the intent and purpose of the design, subject to the written approval of the Designer. Such written approval must occur prior to the deadline established for the last scheduled addendum to be issued. The Designer's written approval will be included as part of the addendum issued by DFCM. If the descriptive material is not restrictive, the products of other manufacturers specified will be accepted without prior approval provided they are compatible with the intent and purpose of the design as determined by the Designer.

**4. Addenda**

All clarifications from DFCM will be in writing and issued as an addendum to the RFS. Addenda will be posted on DFCM's web site at <http://dfcm.utah.gov>. Contractors are responsible for obtaining information contained in each addendum from the web site. Addenda issued prior to the submittal deadline shall become part of the bidding process and must be acknowledged on the bid form. Failure to acknowledge addenda shall result in disqualification from bidding. DFCM shall not be responsible for incorrect information obtained by contractors from sources other than official addenda issued by DFCM.

**5. Financial Responsibility of Contractors, Subcontractors and Sub-subcontractors**

Contractors shall respond promptly to any inquiry in writing by DFCM to any concern of financial responsibility of the Contractor, Subcontractor or Sub-subcontractor. Failure to respond may result in suspension from DFCM's list of pre-qualified contractors.

**6. Licensure**

The Contractor shall comply with and require all of its Subcontractors to comply with the license laws as required by the State of Utah.

**7. Permits**

In concurrence with the requirements for permitting in the general conditions, it is the responsibility of the contractor to obtain the fugitive dust plan requirements from the Utah Division of Air Quality and the SWPPP requirements from the Utah Department of Environmental Quality and submit the completed forms and pay any permit fee that may be required for this specific project. Failure to obtain the required permit may result in work stoppage and/or fines from the regulating authority that will be the sole responsibility of the contractor. Any delay to the project as a result of any such failure to obtain the permit or noncompliance with the permit shall not be eligible for any extension in the Contract Time.

**8. Time is of the Essence**

Time is of the essence in regard to all the requirements of the contract documents.

**9. Bids**

Before submitting a bid, each bidder shall carefully examine the contract documents; shall visit the site of the work; shall fully inform themselves as to all existing conditions and limitations; and shall include in the bid the cost of all items required by the contract documents including those added via addenda. If the bidder observes that portions of the contract documents are at variance with applicable laws, building codes, rules, regulations or contain obvious erroneous or uncoordinated information, the bidder shall promptly notify the DFCM Project Manager prior to the bidding deadline. Changes necessary to correct these issues will be made via addenda issued by DFCM.

The bid, bearing original signatures, must be typed or handwritten in ink on the Bid Form provided in the procurement documents and submitted in a sealed envelope at the location specified by the Invitation to Bid prior to the published deadline for the submission of bids.

A bid bond properly signed by a qualified surety, as indicated on the DFCM Bid Bond form provided along with this Instruction to Bidders, in the amount of 5% of the bid, shall accompany the bid submission to DFCM. **THIS BID BOND MUST BE ON THE DFCM BID BOND FORM PROVIDED WITH THIS INSTRUCTION TO BIDDERS IN ORDER TO BE CONSIDERED AN ACCEPTABLE BID** unless only one bid is received by DFCM, or the failure to comply with the bid bond requirements is determined by the Director of DFCM to be nonsubstantial based on the following:

- (a) the bid bond is submitted on a form other than DFCM's required Bid Bond form and the bid bond meets all other requirements including being issued by a surety firm authorized to do business in the State of Utah and be listed in the U.S. Department of the Treasury Circular 570, Companies Holding Certificates of Authority as Acceptable Securities on Federal Bonds and as Acceptable Reinsuring Companies for an amount not less than the amount of the bond to be issued. A co-surety may be utilized to satisfy this requirement; and
- (b) the contractor provides a bid bond properly signed by a qualified surety and on the required DFCM Bid Bond form by the close of business of the next succeeding business day after the DFCM notifies the bidder of the defective bid bond.

**10. Listing of Subcontractors**

Listing of Subcontractors shall be as summarized in the “Instructions and Subcontractor’s List Form”, included as part of the contract documents. The subcontractors list shall be delivered to DFCM or faxed to DFCM at (801) 538-3677 within 24 hours of the bid opening. Requirements for listing additional subcontractors will be listed in the contract documents.

DFCM retains the right to audit or take other steps necessary to confirm compliance with requirements for the listing and changing of subcontractors. Any contractor who is found to not be in compliance with these requirements may be suspended from DFCM’s list of pre-qualified contractors.

**11. Contract and Bond**

The Contractor's Agreement will be in the form provided in this document. The duration of the contract shall be for the time indicated by the project completion deadline shown on the schedule. The successful bidder, simultaneously with the execution of the Contractor’s Agreement, will be required to furnish a performance bond and a payment bond, both bearing original signatures, upon the forms provided in the procurement documents.

The performance and payment bonds shall be for an amount equal to one hundred percent (100%) of the Contract Sum and secured from a company that meets the requirements specified in the requisite forms. Any bonding requirements for Subcontractors will be specified in the Supplementary General Conditions.

**12. Award of Contract**

The Contract will be awarded as soon as possible to the lowest, responsive and responsible bidder, based on the lowest combination of base bid and acceptable prioritized alternates, provided the bid is reasonable, is in the interests of DFCM to accept and after applying the Utah Preference Laws in U.C.A. Title 63, Chapter 56. DFCM reserves the right to waive any technicalities or formalities in any bid or in the bidding. Alternates will be accepted on a prioritized basis with Alternate 1 being highest priority, Alternate 2 having second priority, etc. Alternates will be selected in prioritized order up to the construction cost estimate.

**13. Right to Reject Bids**

DFCM reserves the right to reject any or all Bids.

**14. Withdrawal of Bids**

Bids may be withdrawn on written request received from bidders within 24 hours after the bid opening if the contractor has made an error in preparing the bid.

**15. DFCM Contractor Performance Rating**

As a contractor completes each project, DFCM will evaluate project performance based on the enclosed “DFCM Contractor Performance Rating” form. The ratings issued on this project may affect the firm’s “pre-qualified” status and their ability to obtain future work with DFCM.



## Stage II PROJECT SCHEDULE

<b>PROJECT NAME: TECHNOLOGY BUILDING REROOF – SOUTHERN UTAH UNIVERSITY CEDAR CITY, UTAH DFCM PROJECT #: 09257730</b>				
<b>Event</b>	<b>Day</b>	<b>Date</b>	<b>Time</b>	<b>Place</b>
Stage II Bidding Documents Available	<b>Monday</b>	<b>June 14, 2010</b>	<b>4:00 PM</b>	DFCM 4110 State Office Building SLC, UT and the DFCM web site*
Mandatory Pre-bid Site Meeting	<b>Wednesday</b>	<b>June 16, 2010</b>	<b>10:30 AM</b>	SUU Technology Building – North East Entrance, SUU Campus, Cedar City, UT
Deadline for Submitting Questions	<b>Monday</b>	<b>June 21, 2010</b>	<b>10:30 AM</b>	<i>Matt Boyer</i> – DFCM E-mail: mboyer@utah.gov Fax 801-538-3267
Addendum Deadline (exception for bid delays)	<b>Tuesday</b>	<b>June 22, 2010</b>	<b>3:00 PM</b>	DFCM web site*
Prime Contractors Turn in Bid and Bid Bond	<b>Wednesday</b>	<b>June 23, 2010</b>	<b>4:00 PM</b>	DFCM 4110 State Office Building SLC, UT
Subcontractors List Due	<b>Thursday</b>	<b>June 24, 2010</b>	<b>4:00 PM</b>	DFCM 4110 State Office Building SLC, UT Fax 801-538-3677
Substantial Completion Date	<b>Thursday</b>	<b>August 26, 2010</b>	<b>TBD</b>	TBD

\* NOTE: DFCM's web site address is <http://dfcm.utah.gov>



## BID FORM

NAME OF BIDDER \_\_\_\_\_ DATE \_\_\_\_\_

To the Division of Facilities Construction and Management  
4110 State Office Building  
Salt Lake City, Utah 84114

The undersigned, responsive to the "Invitation to Bid" and in accordance with the Request for Bids for the **Technology Building Reroof – Southern Utah University – Cedar City, Utah - DFCM PROJECT NO. 09257730** and having examined the Contract Documents and the site of the proposed Work and being familiar with all of the conditions surrounding the construction of the proposed Project, including the availability of labor, hereby proposes to furnish all labor, materials and supplies as required for the Work in accordance with the Contract Documents as specified and within the time set forth and at the price stated below. This price is to cover all expenses incurred in performing the Work required under the Contract Documents of which this bid is a part:

I/We acknowledge receipt of the following Addenda: \_\_\_\_\_

For all work shown on the Drawings and described in the Specifications and Contract Documents, I/we agree to perform for the sum of:

\_\_\_\_\_ DOLLARS (\$ \_\_\_\_\_)  
(In case of discrepancy, written amount shall govern)

I/We guarantee that the Work will be Substantially Complete by August 26, 2010, should I/we be the successful bidder, and agree to pay liquidated damages in the amount of **\$250.00** per day for each day after expiration of the Contract Time as stated in Article 3 of the Contractor's Agreement.

This bid shall be good for 45 days after bid opening.

Enclosed is a 5% bid bond, as required, in the sum of \_\_\_\_\_

The undersigned Contractor's License Number for Utah is \_\_\_\_\_.

BID FORM  
PAGE NO. 2

Upon receipt of notice of award of this bid, the undersigned agrees to execute the contract within ten (10) days, unless a shorter time is specified in Contract Documents, and deliver acceptable Performance and Payment bonds in the prescribed form in the amount of 100% of the Contract Sum for faithful performance of the contract. The Bid Bond attached, in the amount not less than five percent (5%) of the above bid sum, shall become the property of the Division of Facilities Construction and Management as liquidated damages for delay and additional expense caused thereby in the event that the contract is not executed and/or acceptable 100% Performance and Payment bonds are not delivered within time set forth.

Type of Organization: \_\_\_\_\_  
(Corporation, Partnership, Individual, etc.)

Any request and information related to Utah Preference Laws:

\_\_\_\_\_

Respectfully submitted,

\_\_\_\_\_  
Name of Bidder

ADDRESS:  
\_\_\_\_\_  
\_\_\_\_\_

\_\_\_\_\_  
Authorized Signature

**BID BOND**

(Title 63, Chapter 56, U. C. A. 1953, as Amended)

**KNOW ALL PERSONS BY THESE PRESENTS:**

That \_\_\_\_\_ hereinafter referred to as the "Principal," and \_\_\_\_\_, a corporation organized and existing under the laws of the State of \_\_\_\_\_, with its principal office in the City of \_\_\_\_\_ and authorized to transact business in this State and U. S. Department of the Treasury Listed, (Circular 570, Companies Holding Certificates of Authority as Acceptable Securities on Federal Bonds and as Acceptable Reinsuring Companies); hereinafter referred to as the "Surety," are held and firmly bound unto the STATE OF UTAH, hereinafter referred to as the "Obligee," in the amount of \$ \_\_\_\_\_ (5% of the accompanying bid), being the sum of this Bond to which payment the Principal and Surety bind themselves, their heirs, executors, administrators, successors and assigns, jointly and severally, firmly by these presents.

**THE CONDITION OF THIS OBLIGATION IS SUCH** that whereas the Principal has submitted to Obligee the accompanying bid incorporated by reference herein, dated as shown, to enter into a contract in writing for the \_\_\_\_\_ Project.

**NOW, THEREFORE, THE CONDITION OF THE ABOVE OBLIGATION IS SUCH**, that if the said principal does not execute a contract and give bond to be approved by the Obligee for the faithful performance thereof within ten (10) days after being notified in writing of such contract to the principal, then the sum of the amount stated above will be forfeited to the State of Utah as liquidated damages and not as a penalty; if the said principal shall execute a contract and give bond to be approved by the Obligee for the faithful performance thereof within ten (10) days after being notified in writing of such contract to the Principal, then this obligation shall be null and void. It is expressly understood and agreed that the liability of the Surety for any and all defaults of the Principal hereunder shall be the full penal sum of this Bond. The Surety, for value received, hereby stipulates and agrees that obligations of the Surety under this Bond shall be for a term of sixty (60) days from actual date of the bid opening.

**PROVIDED, HOWEVER**, that this Bond is executed pursuant to provisions of Title 63, Chapter 56, Utah Code Annotated, 1953, as amended, and all liabilities on this Bond shall be determined in accordance with said provisions to same extent as if it were copied at length herein.

**IN WITNESS WHEREOF**, the above bounden parties have executed this instrument under their several seals on the date indicated below, the name and corporate seal of each corporate party being hereto affixed and these presents duly signed by its undersigned representative, pursuant to authority of its governing body.

**DATED** this \_\_\_\_\_ day of \_\_\_\_\_, 20\_\_\_\_\_.

**Principal's name and address (if other than a corporation):**

\_\_\_\_\_  
\_\_\_\_\_

By: \_\_\_\_\_

Title: \_\_\_\_\_

**Principal's name and address (if a corporation):**

\_\_\_\_\_  
\_\_\_\_\_

By: \_\_\_\_\_

Title: \_\_\_\_\_  
(Affix Corporate Seal)

**Surety's name and address:**

\_\_\_\_\_  
\_\_\_\_\_

By: \_\_\_\_\_  
Attorney-in-Fact (Affix Corporate Seal)

STATE OF \_\_\_\_\_ )  
 ) ss.  
COUNTY OF \_\_\_\_\_ )

On this \_\_\_\_ day of \_\_\_\_\_, 20\_\_\_\_, personally appeared before me \_\_\_\_\_, whose identity is personally known to me or proved to me on the basis of satisfactory evidence, and who, being by me duly sworn, did say that he/she is the Attorney-in-fact of the above-named Surety Company, and that he/she is duly authorized to execute the same and has complied in all respects with the laws of Utah in reference to becoming sole surety upon bonds, undertakings and obligations, and that he/she acknowledged to me that as Attorney-in-fact executed the same.

Subscribed and sworn to before me this \_\_\_\_\_ day of \_\_\_\_\_, 20\_\_\_\_.  
My Commission Expires: \_\_\_\_\_  
Resides at: \_\_\_\_\_

**Agency:** \_\_\_\_\_  
**Agent:** \_\_\_\_\_  
**Address:** \_\_\_\_\_  
**Phone:** \_\_\_\_\_

\_\_\_\_\_  
NOTARY PUBLIC

Approved As To Form: May 25, 2005  
By Alan S. Bachman, Asst Attorney General



**Division of Facilities Construction and Management**

**INSTRUCTION AND SUBCONTRACTORS LIST FORM**

The three low bidders, as well as all other bidders that desire to be considered, are required by law to submit to DFCM within 24 hours of bid opening a list of **ALL** first-tier subcontractors, including the subcontractor's name, bid amount and other information required by Building Board Rule and as stated in these Contract Documents, based on the following:

**DOLLAR AMOUNTS FOR LISTING**

**PROJECTS UNDER \$500,000: ALL FIRST-TIER SUBS \$20,000 OR OVER MUST BE LISTED**  
**PROJECTS \$500,000 OR MORE: ALL FIRST-TIER SUBS \$35,000 OR OVER MUST BE LISTED**

- Any additional subcontractors identified in the bid documents shall also be listed.
- The DFCM Director may not consider any bid submitted by a bidder if the bidder fails to submit a subcontractor list meeting the requirements of State law.
- List subcontractors for base bid as well as the impact on the list that the selection of any alternate may have.
- Bidder may not list more than one subcontractor to perform the same work.
- If there are no subcontractors for the job that are required to be reported by State law (either because there are no subcontractors that will be used on the project or because there are no first-tier subcontractors over the dollar amounts referred to above), then you do not need to submit a sublist. If you do not submit a sublist, it will be deemed to be a representation by you that there are no subcontractors on the job that are required to be reported under State law. At any time, DFCM reserves the right to inquire, for security purposes, as to the identification of the subcontractors at any tier that will be on the worksite.

**LICENSURE:**

The subcontractor's name, the type of work, the subcontractor's bid amount, and the subcontractor's license number as issued by DOPL, if such license is required under Utah Law, shall be listed. Bidder shall certify that all subcontractors, required to be licensed, are licensed as required by State law. A subcontractor includes a trade contractor or specialty contractor and does not include suppliers who provide only materials, equipment, or supplies to a contractor or subcontractor.

**'SPECIAL EXCEPTION':**

A bidder may list 'Special Exception' in place of a subcontractor when the bidder intends to obtain a subcontractor to perform the work at a later date because the bidder was unable to obtain a qualified or reasonable bid under the provisions of U.C.A. Section 63A-5-208(4). The bidder shall insert the term 'Special Exception' for that category of work, and shall provide documentation with the subcontractor list describing the bidder's efforts to obtain a bid of a qualified subcontractor at a reasonable cost and why the bidder was unable to obtain a qualified subcontractor bid. The Director must find that the bidder complied in good faith with State law requirements for any 'Special Exception' designation, in order for the bid to be considered. If awarded the contract, the Director shall supervise the bidder's efforts to obtain a qualified subcontractor bid. The amount of the awarded contract may not be adjusted to reflect the actual amount of the subcontractor's bid. Any listing of 'Special Exception' on the sublist form shall also include amount allocated for that work.

**GROUNDS FOR DISQUALIFICATION:**

The Director may not consider any bid submitted by a bidder if the bidder fails to submit a subcontractor list meeting the requirements of State law. Director may withhold awarding the contract to a particular bidder if one or more of the proposed subcontractors are considered by the Director to be unqualified to do the Work or for such

**INSTRUCTIONS AND SUBCONTRACTORS LIST FORM**  
**Page No. 2**

other reason in the best interest of the State of Utah. Notwithstanding any other provision in these instructions, if there is a good faith error on the sublist form, at the sole discretion of the Director, the Director may provide notice to the contractor and the contractor shall have 24 hours to submit the correction to the Director. If such correction is submitted timely, then the sublist requirements shall be considered met.

**CHANGES OF SUBCONTRACTORS SPECIFICALLY IDENTIFIED ON SUBLIST FORM:**

Subsequent to twenty-four hours after the bid opening, the contractor may change its listed subcontractors only after receiving written permission from the Director based on complying with all of the following criteria.

- (1) The contractor has established in writing that the change is in the best interest of the State and that the contractor establishes an appropriate reason for the change, which may include, but not is not limited to, the following reasons: the original subcontractor has failed to perform, or is not qualified or capable of performing, and/or the subcontractor has requested in writing to be released.
- (2) The circumstances related to the request for the change do not indicate any bad faith in the original listing of the subcontractors.
- (3) Any requirement set forth by the Director to ensure that the process used to select a new subcontractor does not give rise to bid shopping.
- (4) Any increase in the cost of the subject subcontractor work is borne by the contractor.
- (5) Any decrease in the cost of the subject subcontractor work shall result in a deductive change order being issued for the contract for such decreased amount.
- (6) The Director will give substantial weight to whether the subcontractor has consented in writing to being removed unless the Contractor establishes that the subcontractor is not qualified for the work.

**EXAMPLE:**

Example of a list where there are only four subcontractors:

<b>TYPE OF WORK</b>	<b>SUBCONTRACTOR, "SELF" OR "SPECIAL EXCEPTION"</b>	<b>SUBCONTRACTOR BID AMOUNT</b>	<b>CONTRACTOR LICENSE #</b>
ELECTRICAL	ABCD Electric Inc.	\$350,000.00	123456789000
LANDSCAPING	"Self" *	\$300,000.00	123456789000
CONCRETE (ALTERNATE #1)	XYZ Concrete Inc	\$298,000.00	987654321000
MECHANICAL	"Special Exception" (attach documentation)	Fixed at: \$350,000.00	(TO BE PROVIDED AFTER OBTAINING SUBCONTRACTOR)

\* Bidders may list "self", but it is not required.

**PURSUANT TO STATE LAW - SUBCONTRACTOR BID AMOUNTS CONTAINED IN THIS SUBCONTRACTOR LIST SHALL NOT BE DISCLOSED UNTIL THE CONTRACT HAS BEEN AWARDED.**



**SUBCONTRACTORS LIST  
FAX TO 801-538-3677**

**PROJECT TITLE:** \_\_\_\_\_

**Caution:** You must read and comply fully with instructions.

TYPE OF WORK	SUBCONTRACTOR, "SELF" OR "SPECIAL EXCEPTION"	SUBCONTRACTOR BID AMOUNT	CONT. LICENSE #

- We certify that:
1. This list includes all subcontractors as required by the instructions, including those related to the base bid as well as any alternates.
  2. We have listed "Self" or "Special Exception" in accordance with the instructions.
  3. All subcontractors are appropriately licensed as required by State law.

FIRM: \_\_\_\_\_

DATE: \_\_\_\_\_

SIGNED BY: \_\_\_\_\_

**NOTICE:** FAILURE TO SUBMIT THIS FORM, PROPERLY COMPLETED AND SIGNED, AS REQUIRED IN THESE CONTRACT DOCUMENTS, SHALL BE GROUNDS FOR OWNER'S REFUSAL TO ENTER INTO A WRITTEN CONTRACT WITH BIDDER. ACTION MAY BE TAKEN AGAINST BIDDERS BID BOND AS DEEMED APPROPRIATE BY OWNER. ATTACH A SECOND PAGE IF NECESSARY.

## CONTRACTOR'S AGREEMENT

FOR:

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

THIS CONTRACTOR'S AGREEMENT, made and entered into this \_\_\_\_ day of \_\_\_\_\_, 20\_\_, by and between the DIVISION OF FACILITIES CONSTRUCTION AND MANAGEMENT, hereinafter referred to as "DFCM", and \_\_\_\_\_, incorporated in the State of \_\_\_\_\_ and authorized to do business in the State of Utah, hereinafter referred to as "Contractor", whose address is \_\_\_\_\_.

WITNESSETH: WHEREAS, DFCM intends to have Work performed at \_\_\_\_\_  
\_\_\_\_\_.

WHEREAS, Contractor agrees to perform the Work for the sum stated herein.

NOW, THEREFORE, DFCM and Contractor for the consideration provided in this Contractor's Agreement, agree as follows:

**ARTICLE 1. SCOPE OF WORK.** The Work to be performed shall be in accordance with the Contract Documents prepared by \_\_\_\_\_ and entitled "\_\_\_\_\_."

The DFCM General Conditions ("General Conditions") dated May 25, 2005 and Supplemental General Conditions dated July 15, 2008, July 1, 2009, and revised May 11, 2010 ("also referred to as General Conditions") and on file at the office of DFCM and available on the DFCM website, are hereby incorporated by reference as part of this Agreement and are included in the specifications for this Project. All terms used in this Contractor's Agreement shall be as defined in the Contract Documents, and in particular, the General Conditions.

The Contractor Agrees to furnish labor, materials and equipment to complete the Work as required in the Contract Documents which are hereby incorporated by reference. It is understood and agreed by the parties hereto that all Work shall be performed as required in the Contract Documents and shall be subject to inspection and approval of DFCM or its authorized representative. The relationship of the Contractor to the DFCM hereunder is that of an independent Contractor.

**ARTICLE 2. CONTRACT SUM.** The DFCM agrees to pay and the Contractor agrees to accept in full performance of this Contractor's Agreement, the sum of \_\_\_\_\_  
\_\_\_\_\_ DOLLARS AND NO CENTS (\$\_\_\_\_\_.00), which

CONTRACTOR'S AGREEMENT  
PAGE NO. 2

is the base bid, and which sum also includes the cost of a 100% Performance Bond and a 100% Payment Bond as well as all insurance requirements of the Contractor. Said bonds have already been posted by the Contractor pursuant to State law. The required proof of insurance certificates have been delivered to DFCM in accordance with the General Conditions before the execution of this Contractor's Agreement.

**ARTICLE 3. TIME OF COMPLETION AND DELAY REMEDY.** The Work shall be Substantially Complete by \_\_\_\_\_. Contractor agrees to pay liquidated damages in the amount of \$\_\_\_\_\_ per day for each day after expiration of the Contract Time until the Contractor achieves Substantial Completion in accordance with the Contract Documents, if Contractor's delay makes the damages applicable. The provision for liquidated damages is: (a) to compensate the DFCM for delay only; (b) is provided for herein because actual damages can not be readily ascertained at the time of execution of this Contractor's Agreement; (c) is not a penalty; and (d) shall not prevent the DFCM from maintaining Claims for other non-delay damages, such as costs to complete or remedy defective Work.

No action shall be maintained by the Contractor, including its or Subcontractor or suppliers at any tier, against the DFCM or State of Utah for damages or other claims due to losses attributable to hindrances or delays from any cause whatsoever, including acts and omissions of the DFCM or its officers, employees or agents, except as expressly provided in the General Conditions. The Contractor may receive a written extension of time, signed by the DFCM, in which to complete the Work under this Contractor's Agreement in accordance with the General Conditions.

**ARTICLE 4. CONTRACT DOCUMENTS.** The Contract Documents consist of this Contractor's Agreement, the Conditions of the Contract (DFCM General Conditions, Supplementary and other Conditions), the Drawings, Specifications, Addenda and Modifications. The Contract Documents shall also include the bidding documents, including the Notice to Contractors, Instructions to Bidders/Proposers and the Bid/Proposal, to the extent not in conflict therewith and other documents and oral presentations that are documented as an attachment to the contract.

All such documents are hereby incorporated by reference herein. Any reference in this Contractor's Agreement to certain provisions of the Contract Documents shall in no way be construed as to lessen the importance or applicability of any other provisions of the Contract Documents.

**ARTICLE 5. PAYMENT.** The DFCM agrees to pay the Contractor from time to time as the Work progresses, but not more than once each month after the date of Notice to Proceed, and only upon Certificate of the A/E for Work performed during the preceding calendar month, ninety-five percent (95%) of the value of the labor performed and ninety-five percent (95%) of the value of materials furnished in place or on the site. The Contractor agrees to furnish to the DFCM invoices for materials purchased and on the site but not installed, for which the Contractor requests payment and agrees to safeguard and protect such equipment or materials and is responsible for safekeeping thereof and if such be stolen, lost or destroyed, to replace same.

Such evidence of labor performed and materials furnished as the DFCM may reasonably require shall be supplied by the Contractor at the time of request for Certificate of Payment on account. Materials for which payment has been made cannot be removed from the job site without DFCM's written approval. Five percent (5%) of the earned amount shall be retained from each monthly payment. The retainage, including any additional retainage imposed and the release of any retainage, shall be in accordance with UCA 13-8-5 as amended. Contractor shall also comply with the requirements of UCA 13-8-5, including restrictions of retainage regarding subcontractors and the distribution of interest earned on the retention proceeds. The DFCM shall not be responsible for enforcing the Contractor's obligations under State law in fulfilling the retention law requirements with subcontractors at any tier.

**ARTICLE 6. INDEBTEDNESS.** Before final payment is made, the Contractor must submit evidence satisfactory to the DFCM that all payrolls, materials bills, subcontracts at any tier and outstanding indebtedness in connection with the Work have been properly paid. Final Payment will be made after receipt of said evidence, final acceptance of the Work by the DFCM as well as compliance with the applicable provisions of the General Conditions.

Contractor shall respond immediately to any inquiry in writing by DFCM as to any concern of financial responsibility and DFCM reserves the right to request any waivers, releases or bonds from Contractor in regard to any rights of Subcontractors (including suppliers) at any tier or any third parties prior to any payment by DFCM to Contractor.

**ARTICLE 7. ADDITIONAL WORK.** It is understood and agreed by the parties hereto that no money will be paid to the Contractor for additional labor or materials furnished unless a new contract in writing or a Modification hereof in accordance with the General Conditions and the Contract Documents for such additional labor or materials has been executed. The DFCM specifically reserves the right to modify or amend this Contractor's Agreement and the total sum due hereunder either by enlarging or restricting the scope of the Work.

**ARTICLE 8. INSPECTIONS.** The Work shall be inspected for acceptance in accordance with the General Conditions.

**ARTICLE 9. DISPUTES.** Any dispute, PRE or Claim between the parties shall be subject to the provisions of Article 7 of the General Conditions. DFCM reserves all rights to pursue its rights and remedies as provided in the General Conditions.

**ARTICLE 10. TERMINATION, SUSPENSION OR ABANDONMENT.** This Contractor's Agreement may be terminated, suspended or abandoned in accordance with the General Conditions.

**ARTICLE 11. DFCM'S RIGHT TO WITHHOLD CERTAIN AMOUNT AND MAKE USE THEREOF.** The DFCM may withhold from payment to the Contractor such amount as, in DFCM's judgment, may be necessary to pay just claims against the Contractor or Subcontractor at any tier for labor and services rendered and materials furnished in and about the Work. The DFCM may apply such withheld amounts for the payment of such claims in DFCM's discretion. In so doing, the DFCM shall be deemed the agent of Contractor and payment so made by the DFCM shall be considered as payment made under this Contractor's Agreement by the DFCM to the Contractor. DFCM shall not be liable to the Contractor for any such payment made in good faith. Such withholdings and payments may be made without prior approval of the Contractor and may be also be prior to any determination as a result of any dispute, PRE, Claim or litigation.

**ARTICLE 12. INDEMNIFICATION.** The Contractor shall comply with the indemnification provisions of the General Conditions.

**ARTICLE 13. SUCCESSORS AND ASSIGNMENT OF CONTRACT.** The DFCM and Contractor, respectively bind themselves, their partners, successors, assigns and legal representatives to the other party to this Agreement, and to partners, successors, assigns and legal representatives of such other party with respect to all covenants, provisions, rights and responsibilities of this Contractor's Agreement. The Contractor shall not assign this Contractor's Agreement without the prior written consent of the DFCM, nor shall the Contractor assign any moneys due or to become due as well as any rights under this Contractor's Agreement, without prior written consent of the DFCM.

**ARTICLE 14. RELATIONSHIP OF THE PARTIES.** The Contractor accepts the relationship of trust and confidence established by this Contractor's Agreement and covenants with the DFCM to cooperate with the DFCM and A/E and use the Contractor's best skill, efforts and judgment in furthering the interest of the DFCM; to furnish efficient business administration and supervision; to make best efforts to furnish at all times an adequate supply of workers and materials; and to perform the Work in the best and most expeditious and economic manner consistent with the interests of the DFCM.

**ARTICLE 15. AUTHORITY TO EXECUTE AND PERFORM AGREEMENT.** Contractor and DFCM each represent that the execution of this Contractor's Agreement and the performance thereunder is within their respective duly authorized powers.

**ARTICLE 16. ATTORNEY FEES AND COSTS.** Except as otherwise provided in the dispute resolution provisions of the General Conditions, the prevailing party shall be entitled to reasonable attorney fees and costs incurred in any action in the District Court and/or appellate body to enforce this Contractor's Agreement or recover damages or any other action as a result of a breach thereof.

**IN WITNESS WHEREOF**, the parties hereto have executed this Contractor's Agreement on the day and year stated hereinabove.

**CONTRACTOR:** \_\_\_\_\_

\_\_\_\_\_  
Signature Date

Title: \_\_\_\_\_

\_\_\_\_\_  
Please type/print name clearly

State of \_\_\_\_\_)

)

County of \_\_\_\_\_)

On this \_\_\_\_ day of \_\_\_\_\_, 20\_\_\_\_, personally appeared before me, \_\_\_\_\_, whose identity is personally known to me (or proved to me on the basis of satisfactory evidence) and who by me duly sworn (or affirmed), did say that he (she) is the \_\_\_\_\_ (title or office) of the firm and that said document was signed by him (her) in behalf of said firm.

(SEAL)

\_\_\_\_\_  
**Notary Public**

My Commission Expires \_\_\_\_\_

APPROVED AS TO AVAILABILITY  
OF FUNDS:

\_\_\_\_\_  
David D. Williams, Jr. Date  
DFCM Administrative Services Director

**DIVISION OF FACILITIES  
CONSTRUCTION AND MANAGEMENT**

\_\_\_\_\_  
Lynn A. Hinrichs Date  
Assistant Director Construction Management

APPROVED AS TO FORM:  
ATTORNEY GENERAL  
May 11, 2010  
By: Alan S. Bachman  
Asst Attorney General

APPROVED FOR EXPENDITURE:  
  
\_\_\_\_\_  
Division of Finance Date

**PERFORMANCE BOND**

(Title 63, Chapter 56, U. C. A. 1953, as Amended)

That \_\_\_\_\_ hereinafter referred to as the "Principal" and \_\_\_\_\_, a corporation organized and existing under the laws of the State of \_\_\_\_\_, with its principal office in the City of \_\_\_\_\_ and authorized to transact business in this State and U. S. Department of the Treasury Listed (Circular 570, Companies Holding Certificates of Authority as Acceptable Securities on Federal Bonds and as Acceptable Reinsuring Companies); hereinafter referred to as the "Surety," are held and firmly bound unto the State of Utah, hereinafter referred to as the "Obligee," in the amount of \_\_\_\_\_ DOLLARS (\$) for the payment whereof, the said Principal and Surety bind themselves and their heirs, administrators, executors, successors and assigns, jointly and severally, firmly by these presents.

**WHEREAS**, the Principal has entered into a certain written Contract with the Obligee, dated the \_\_\_\_\_ day of \_\_\_\_\_, 20\_\_\_\_, to construct \_\_\_\_\_ in the County of \_\_\_\_\_, State of Utah, Project No. \_\_\_\_\_, for the approximate sum of \_\_\_\_\_ Dollars (\$ \_\_\_\_\_), which Contract is hereby incorporated by reference herein.

**NOW, THEREFORE**, the condition of this obligation is such that if the said Principal shall faithfully perform the Contract in accordance with the Contract Documents including, but not limited to, the Plans, Specifications and conditions thereof, the one year performance warranty, and the terms of the Contract as said Contract may be subject to Modifications or changes, then this obligation shall be void; otherwise it shall remain in full force and effect.

No right of action shall accrue on this bond to or for the use of any person or corporation other than the state named herein or the heirs, executors, administrators or successors of the Owner.

The parties agree that the dispute provisions provided in the Contract Documents apply and shall constitute the sole dispute procedures of the parties.

**PROVIDED, HOWEVER**, that this Bond is executed pursuant to the Provisions of Title 63, Chapter 56, Utah Code Annotated, 1953, as amended, and all liabilities on this Bond shall be determined in accordance with said provisions to the same extent as if it were copied at length herein.

**IN WITNESS WHEREOF**, the said Principal and Surety have signed and sealed this instrument this \_\_\_\_\_ day of \_\_\_\_\_, 20\_\_\_\_\_.

**WITNESS OR ATTESTATION:**

\_\_\_\_\_

**PRINCIPAL:**

\_\_\_\_\_

By: \_\_\_\_\_

(Seal)

Title: \_\_\_\_\_

**WITNESS OR ATTESTATION:**

\_\_\_\_\_

**SURETY:**

\_\_\_\_\_

By: \_\_\_\_\_

Attorney-in-Fact (Seal)

STATE OF \_\_\_\_\_ )  
 ) ss.  
COUNTY OF \_\_\_\_\_ )

On this \_\_\_\_\_ day of \_\_\_\_\_, 20\_\_\_\_, personally appeared before me \_\_\_\_\_, whose identity is personally known to me or proved to me on the basis of satisfactory evidence, and who, being by me duly sworn, did say that he/she is the Attorney in-fact of the above-named Surety Company and that he/she is duly authorized to execute the same and has complied in all respects with the laws of Utah in reference to becoming sole surety upon bonds, undertakings and obligations, and that he/she acknowledged to me that as Attorney-in-fact executed the same.

Subscribed and sworn to before me this \_\_\_\_\_ day of \_\_\_\_\_, 20\_\_\_\_\_.

My commission expires: \_\_\_\_\_

Resides at: \_\_\_\_\_

\_\_\_\_\_  
NOTARY PUBLIC

**Agency:** \_\_\_\_\_  
**Agent:** \_\_\_\_\_  
**Address:** \_\_\_\_\_  
**Phone:** \_\_\_\_\_

Approved As To Form: May 25, 2005  
By Alan S. Bachman, Asst Attorney General

**PAYMENT BOND**

(Title 63, Chapter 56, U. C. A. 1953, as Amended)

**KNOW ALL PERSONS BY THESE PRESENTS:**

That \_\_\_\_\_ hereinafter referred to as the "Principal," and \_\_\_\_\_, a corporation organized and existing under the laws of the State of \_\_\_\_\_ authorized to do business in this State and U. S. Department of the Treasury Listed (Circular 570, Companies Holding Certificates of Authority as Acceptable Securities on Federal Bonds and as Acceptable Reinsuring Companies); with its principal office in the City of \_\_\_\_\_, hereinafter referred to as the "Surety," are held and firmly bound unto the State of Utah hereinafter referred to as the "Obligee," in the amount of \_\_\_\_\_ Dollars (\$ \_\_\_\_\_) for the payment whereof, the said Principal and Surety bind themselves and their heirs, administrators, executors, successors and assigns, jointly and severally, firmly by these presents.

**WHEREAS**, the Principal has entered into a certain written Contract with the Obligee, dated the \_\_\_\_\_ day of \_\_\_\_\_, 20\_\_\_\_, to construct \_\_\_\_\_ in the County of \_\_\_\_\_, State of Utah, Project No. \_\_\_\_\_ for the approximate sum of \_\_\_\_\_ Dollars (\$ \_\_\_\_\_), which contract is hereby incorporated by reference herein.

**NOW, THEREFORE**, the condition of this obligation is such that if the said Principal shall pay all claimants supplying labor or materials to Principal or Principal's Subcontractors in compliance with the provisions of Title 63, Chapter 56, of Utah Code Annotated, 1953, as amended, and in the prosecution of the Work provided for in said Contract, then, this obligation shall be void; otherwise it shall remain in full force and effect.

That said Surety to this Bond, for value received, hereby stipulates and agrees that no changes, extensions of time, alterations or additions to the terms of the Contract or to the Work to be performed thereunder, or the specifications or drawings accompanying same shall in any way affect its obligation on this Bond, and does hereby waive notice of any such changes, extensions of time, alterations or additions to the terms of the Contract or to the Work or to the specifications or drawings and agrees that they shall become part of the Contract Documents.

**PROVIDED, HOWEVER**, that this Bond is executed pursuant to the provisions of Title 63, Chapter 56, Utah Code Annotated, 1953, as amended, and all liabilities on this Bond shall be determined in accordance with said provisions to the same extent as if it were copied at length herein.

**IN WITNESS WHEREOF**, the said Principal and Surety have signed and sealed this instrument this \_\_\_\_\_ day of \_\_\_\_\_, 20\_\_\_\_.

**WITNESS OR ATTESTATION:**

\_\_\_\_\_

**PRINCIPAL:**

\_\_\_\_\_

By: \_\_\_\_\_ (Seal)  
Title: \_\_\_\_\_

**WITNESS OR ATTESTATION:**

\_\_\_\_\_

**SURETY:**

\_\_\_\_\_

By: \_\_\_\_\_ (Seal)  
Attorney-in-Fact

STATE OF \_\_\_\_\_ )  
 ) ss.  
COUNTY OF \_\_\_\_\_ )

On this \_\_\_\_\_ day of \_\_\_\_\_, 20\_\_\_\_, personally appeared before me \_\_\_\_\_, whose identity is personally known to me or proved to me on the basis of satisfactory evidence, and who, being by me duly sworn, did say that he/she is the Attorney-in-fact of the above-named Surety Company, and that he/she is duly authorized to execute the same and has complied in all respects with the laws of Utah in reference to becoming sole surety upon bonds, undertakings and obligations, and that he/she acknowledged to me that as Attorney-in-fact executed the same.

Subscribed and sworn to before me this \_\_\_\_\_ day of \_\_\_\_\_, 20\_\_\_\_.

My commission expires: \_\_\_\_\_  
Resides at: \_\_\_\_\_

\_\_\_\_\_  
NOTARY PUBLIC

**Agency:** \_\_\_\_\_  
**Agent:** \_\_\_\_\_  
**Address:** \_\_\_\_\_  
**Phone:** \_\_\_\_\_

Approved As To Form: May 25, 2005  
By Alan S. Bachman, Asst Attorney General



Division of Facilities Construction and Management

DFCM

CERTIFICATE OF SUBSTANTIAL COMPLETION

PROJECT \_\_\_\_\_ PROJECT NO: \_\_\_\_\_

AGENCY/INSTITUTION \_\_\_\_\_

AREA ACCEPTED \_\_\_\_\_

The Work performed under the subject Contract has been reviewed on this date and found to be Substantially Completed as defined in the General Conditions; including that the construction is sufficiently completed in accordance with the Contract Documents, as modified by any change orders agreed to by the parties, so that the State of Utah can occupy the Project or specified area of the Project for the use for which it is intended.

The DFCM - (Owner) accepts the Project or specified area of the Project as Substantially Complete and will assume full possession of the Project or specified area of the Project at \_\_\_\_\_ (time) on \_\_\_\_\_ (date).

The DFCM accepts the Project for occupancy and agrees to assume full responsibility for maintenance and operation, including utilities and insurance, of the Project subject to the itemized responsibilities and/or exceptions noted below:

\_\_\_\_\_  
\_\_\_\_\_

The Owner acknowledges receipt of the following closeout and transition materials:

- Record Drawings
- O & M Manuals
- Warranty Documents
- Completion of Training Requirements

A list of items to be completed or corrected (Punch List) is attached hereto. The failure to include an item on it does not alter the responsibility of the Contractor to complete all the Work in accordance with the Contract Documents, including authorized changes thereof. The amount of \_\_\_\_\_. (Twice the value of the punch list work) shall be retained to assure the completion of the punch list work.

The Contractor shall complete or correct the Work on the list of (Punch List) items appended hereto within \_\_\_\_\_ calendar days from the above date of issuance of this Certificate. If the list of items is not completed within the time allotted the Owner has the right to be compensated for the delays and/or complete the work with the help of independent contractor at the expense of the retained project funds. If the retained project funds are insufficient to cover the delay/completion damages, the Owner shall be promptly reimbursed for the balance of the funds needed to compensate the Owner.

\_\_\_\_\_  
CONTRACTOR (include name of firm) by: \_\_\_\_\_  
(Signature) DATE

\_\_\_\_\_  
A/E (include name of firm) by: \_\_\_\_\_  
(Signature) DATE

\_\_\_\_\_  
USING INSTITUTION OR AGENCY by: \_\_\_\_\_  
(Signature) DATE

\_\_\_\_\_  
DFCM (Owner) by: \_\_\_\_\_  
(Signature) DATE

4110 State Office Building, Salt Lake City, Utah 84114  
telephone 801-538-3018 • facsimile 801-538-3267 • <http://dfcm.utah.gov>

cc: Parties Noted  
DFCM, Director

**General Contractor Performance Rating Form**

Project Name:		DFCM Project#	
Contractor:  (ABC Construction, John Doe, 111-111-1111)	A/E:  (ABC Architects, Jane Doe, 222-222-2222)	Original Contract Amount:	Final Contract Amount:
DFCM Project Manager:		Contract Date:	
Completion Date:		Date of Rating:	

Rating Guideline	QUALITY OF PRODUCT OR SERVICES	COST CONTROL	TIMELINESS OF PERFORMANCE	BUSINESS RELATIONS
<b>5-Exceptional</b>	Contractor has demonstrated an exceptional performance level in any of the above four categories that justifies adding a point to the score. Contractor performance clearly exceeds the performance levels described as "Very Good"			
<b>4-Very Good</b>	Contractor is in compliance with contract requirements and/or delivers quality product/service.	Contractor is effective in managing costs and submits current, accurate, and complete billings	Contractor is effective in meeting milestones and delivery schedule	Response to inquiries, technical/service/administrative issues is effective
<b>3-Satisfactory</b>	Minor inefficiencies/errors have been identified	Contractor is usually effective in managing cost	Contractor is usually effective in meeting milestones and delivery schedules	Response to inquires technical/service/administrative issues is somewhat effective
<b>2-Marginal</b>	Major problems have been encountered	Contractor is having major difficulty managing cost effectively	Contractor is having major difficulty meeting milestones and delivery schedule	Response to inquiries, technical/service/administrative issues is marginally effective
<b>1-Unsatisfactory</b>	Contractor is not in compliance and is jeopardizing achievement of contract objectives	Contractor is unable to manage costs effectively	Contractor delays are jeopardizing performance of contract objectives	Response to inquiries, technical/service/administrative issues is not effective

<b>1. Rate Contractors quality of workmanship, management of sub contractor performance, project cleanliness, organization and safety requirement.</b>	<b>Score</b>
<u>Agency Comments:</u>	
<u>A &amp; E Comments:</u>	
<u>DFCM Project Manager Comments:</u>	

<b>2. Rate Contractor administration of project costs, change orders and financial management of the project budget.</b>	<b>Score</b>
<u>Agency Comments:</u>	
<u>A &amp; E Comments:</u>	
<u>DFCM Project Manager Comments:</u>	

<b>3. Rate Contractor's performance and adherence to Project Schedule, delay procedures and requirements of substantial completion, inspection and punch-list performance.</b>	<b>Score</b>
<u>Agency Comments:</u>	
<u>A &amp; E Comments:</u>	
<u>DFCM Project Manager Comments:</u>	

<b>4. Evaluate performance of contractor management team including project manager, engineer and superintendent also include in the rating team's ability to work well with owner, user agency and consultants.</b>	<b>Score</b>
<u>Agency Comments:</u>	
<u>A &amp; E Comments:</u>	
<u>DFCM Project Manager Comments:</u>	

5. Rate success of Contractor's management plan, completion of the plans mitigation of project risks and performance of value engineering concepts.	Score
<u>Agency Comments:</u>	
<u>A &amp; E Comments:</u>	
<u>DFCM Project Manager Comments:</u>	

<b>Signed by:</b>	<b>Date:</b>	<b>Mean Score</b>
-------------------	--------------	-------------------

**Additional Comments:**

# SOUTHERN UTAH UNIVERSITY TECHNOLOGY BUILDING RE-ROOF




State of Utah—Department of Administrative Services


DIVISION OF FACILITIES CONSTRUCTION  
AND MANAGEMENT

4110 State Office Building/Salt Lake City, Utah 84114/588-3018

**DFCM Project #09257730**

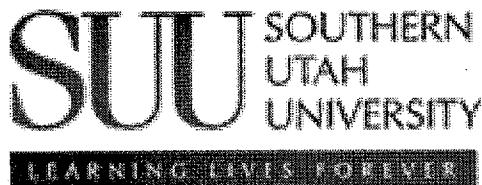

## PROJECT MANUAL SPECIFICATIONS

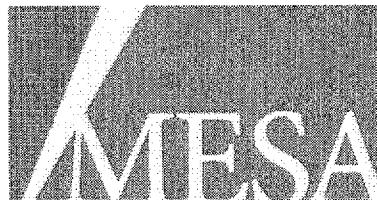

CONSULTING GROUP INC

architects engineers planners

53 North Main Street St. George, UT 84770  
Phone 435-673-4800 Fax 435-673-4801  
www.mesa-cg.com mcg@mesa-cg.com

SET # \_\_\_\_\_

BLANK PAGE

# **SOUTHERN UTAH UNIVERSITY TECHNOLOGY BUILDING RE-ROOF**




State of Utah—Department of Administrative Services

**DIVISION OF FACILITIES CONSTRUCTION  
AND MANAGEMENT**

4110 State Office Building/Salt Lake City, Utah 84114/638-3018

**DFCM Project #09257730  
Southern Utah University; Cedar City, Utah**

## **TABLE OF CONTENTS**

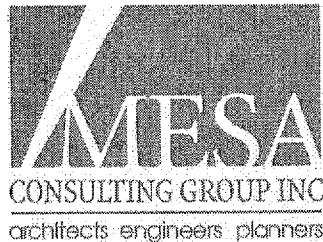

BLANK PAGE

Division	Section Title
----------	---------------

**SPECIFICATIONS**

*General Requirements Subgroup*

**DIVISION 01 - GENERAL REQUIREMENTS**

- 011000 SUMMARY
- 012500 SUBSTITUTION PROCEDURES
- 012600 CONTRACT MODIFICATION PROCEDURES
- 013100 PROJECT MANAGEMENT AND COORDINATION
- 013200 CONSTRUCTION PROGRESS DOCUMENTATION
- 013300 SUBMITTAL PROCEDURES
- 014000 QUALITY REQUIREMENTS
- 014200 REFERENCES
- 015000 TEMPORARY FACILITIES AND CONTROLS
- 016000 PRODUCT REQUIREMENTS
- 017300 EXECUTION
- 017419 CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL
- 017700 CLOSEOUT PROCEDURES
- 017839 PROJECT RECORD DOCUMENTS

*Facility Construction Subgroup*

**DIVISION 02 - EXISTING CONDITIONS**

NOT APPLICABLE

**DIVISION 03 - CONCRETE**

NOT APPLICABLE

**DIVISION 04 - MASONRY**

NOT APPLICABLE

**DIVISION 05 - METALS**

- 055213 PIPE AND TUBE RAILINGS

**DIVISION 06 - WOOD, PLASTICS, AND COMPOSITES**

- 061053 MISCELLANEOUS ROUGH CARPENTRY

**DIVISION 07 - THERMAL AND MOISTURE PROTECTION**

- 070150 PREPARATION FOR RE-ROOFING
- 075419 POLYVINYL-CHLORIDE (PVC) ROOFING
- 076200 SHEET METAL FLASHING AND TRIM
- 079200 JOINT SEALANTS

**DIVISION 08 - OPENINGS**  
NOT APPLICABLE

**DIVISION 09 - FINISHES**  
NOT APPLICABLE

**DIVISION 10 - SPECIALTIES**  
NOT APPLICABLE

**DIVISION 11 - EQUIPMENT**  
NOT APPLICABLE

**DIVISION 12 - FURNISHINGS**  
NOT APPLICABLE

**DIVISION 13 - SPECIAL CONSTRUCTION**  
NOT APPLICABLE

**DIVISION 14 - CONVEYING EQUIPMENT**  
NOT APPLICABLE

*Facility Services Subgroup*

**DIVISION 21 - FIRE SUPPRESSION**  
NOT APPLICABLE

**DIVISION 22 - PLUMBING**  
220548 VIBRATION & SEISMIC CONTROLS FOR HVAC PIPING & EQUIPMENT  
221413 FACILITY STORM DRAINAGE PIPING  
221423 STORM DRAINAGE PIPING SPECIALTIES

**DIVISION 23 - HEATING VENTILATING AND AIR CONDITIONING**  
NOT APPLICABLE

**DIVISION 26 - ELECTRICAL**  
261000 ELECTRICAL GENERAL PROVISIONS  
261070 ELECTRICAL CONNECTIONS FOR EQUIPMENT  
261080 DEMOLITION  
261100 CONDUIT RACEWAYS

**DIVISION 27 - COMMUNICATIONS**  
NOT APPLICABLE

**DIVISION 28 - ELECTRONIC SAFETY AND SECURITY**  
NOT APPLICABLE

*Site and Infrastructure Subgroup*

**DIVISION 31 - EARTHWORK**  
NOT APPLICABLE

**DIVISION 32 - EXTERIOR IMPROVEMENTS**  
NOT APPLICABLE

**DIVISION 33 - UTILITIES**  
NOT APPLICABLE

END OF TABLE OF CONTENTS

BLANK PAGE

# **SOUTHERN UTAH UNIVERSITY TECHNOLOGY BUILDING RE-ROOF**




State of Utah—Department of Administrative Services

**DIVISION OF FACILITIES CONSTRUCTION  
AND MANAGEMENT**

4110 State Office Building/Salt Lake City, Utah 84114/801-538-3018

**DFCM Project #09257730  
Southern Utah University; Cedar City, Utah**

## **BIDDING REQUIREMENTS**

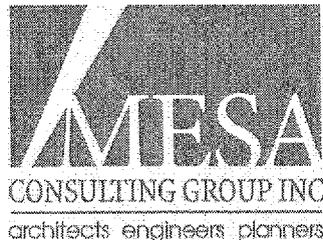

BLANK PAGE

# **SOUTHERN UTAH UNIVERSITY TECHNOLOGY BUILDING RE-ROOF**



State of Utah—Department of Administrative Services

**DIVISION OF FACILITIES CONSTRUCTION  
AND MANAGEMENT**

410 State Office Building/Salt Lake City, Utah 84114/508-3018

**DFCM Project #09257730  
Southern Utah University; Cedar City, Utah**

## **CONTRACT FORMS**



BLANK PAGE

# **SOUTHERN UTAH UNIVERSITY TECHNOLOGY BUILDING RE-ROOF**



State of Utah—Department of Administrative Services

**DIVISION OF FACILITIES CONSTRUCTION  
AND MANAGEMENT**

4110 State Office Building/Salt Lake City, Utah 84114/588-3018

**DFCM Project #09257730  
Southern Utah University; Cedar City, Utah**

## **GENERAL CONDITIONS**



BLANK PAGE

# **SOUTHERN UTAH UNIVERSITY TECHNOLOGY BUILDING RE-ROOF**




State of Utah—Department of Administrative Services

DIVISION OF FACILITIES CONSTRUCTION  
AND MANAGEMENT

4110 State Office Building/Salt Lake City, Utah 84114/688-8018

**DFCM Project #09257730  
Southern Utah University; Cedar City, Utah**

## **DIVISION 1 GENERAL REQUIREMENTS**

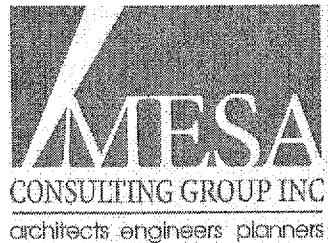

BLANK PAGE

SECTION 011000 - SUMMARY

PART 1 - GENERAL

1.1 SUMMARY

A. Section includes:

1. Project information.
2. Work covered by Contract Documents.
3. Access to site.
4. Coordination with occupants.
5. Work restrictions.
6. Specification and drawing conventions.

B. Related Section:

1. Division 01 Section "Temporary Facilities and Controls" for limitations and procedures governing temporary use of Owner's facilities.

1.2 PROJECT INFORMATION

A. Project Identification: Re-roof of Technology Building; Southern Utah University

1. Project Location: Cedar City, Utah 84720.

B. Owner: State of Utah.

1. Owner's Representative: Matt Boyer; Division of Facilities Construction Management; 4110 State Office Building, Salt Lake City, Utah 84114.

C. Architect: Mesa Consulting Group; 53 North Main Street, St. George, Utah 84770.

1.3 WORK COVERED BY CONTRACT DOCUMENTS

A. The Work of the Project is defined by the Contract Documents and consists of the following:

1. Removal of existing 24,228 square feet of built-up roofing and replace with polyvinyl chloride membrane.

B. Type of Contract.

1. Project will be constructed under a single prime contract.

#### 1.4 ACCESS TO SITE

- A. General: Contractor shall have limited use of Project site for construction operations as indicated on Drawings by the Contract limits and as indicated by requirements of this Section.
- B. Use of Site: Limit use of Project site to work in areas indicated. Do not disturb portions of Project site beyond areas in which the Work is indicated.
  - 1. Limits: Confine construction operations to exterior roof areas.
  - 2. Driveways, Walkways and Entrances: Keep driveways, loading areas, and entrances serving premises clear and available to Owner, Owner's employees, and emergency vehicles at all times. Do not use these areas for parking or storage of materials.
    - a. Schedule deliveries to minimize use of driveways and entrances by construction operations.
    - b. Schedule deliveries to minimize space and time requirements for storage of materials and equipment on-site.
- C. Condition of Existing Building: Maintain portions of existing building affected by construction operations in a weathertight condition throughout construction period. Repair damage caused by construction operations.

#### 1.5 COORDINATION WITH OCCUPANTS

- A. Full Owner Occupancy: Owner will occupy site and existing building(s) during entire construction period. Cooperate with Owner during construction operations to minimize conflicts and facilitate Owner usage. Perform the Work so as not to interfere with Owner's day-to-day operations. Maintain existing exits unless otherwise indicated.
  - 1. Maintain access to existing walkways, corridors, and other adjacent occupied or used facilities. Do not close or obstruct walkways, corridors, or other occupied or used facilities without written permission from Owner and approval of authorities having jurisdiction.
  - 2. Notify the Owner not less than 72 hours in advance of activities that will affect Owner's operations.

#### 1.6 WORK RESTRICTIONS

- A. Work Restrictions, General: Comply with restrictions on construction operations.
  - 1. Comply with limitations on use of public streets and other requirements of authorities having jurisdiction.
- B. On-Site Work Hours: Limit work in the existing building to normal business working hours of 7:00 a.m. to 6:00 p.m., Monday through Friday, except as otherwise indicated.
- C. Existing Utility Interruptions: Do not interrupt utilities serving facilities occupied by Owner or others unless permitted under the following conditions and then only after providing temporary utility services according to requirements indicated:

1. Notify Owner not less than two days in advance of proposed utility interruptions.
  2. Obtain Owner's written permission before proceeding with utility interruptions.
- D. Noise, Vibration, and Odors: Coordinate operations that may result in high levels of noise and vibration, odors, or other disruption to Owner occupancy with Owner.
1. Notify Owner not less than two days in advance of proposed disruptive operations.
  2. Obtain Owner's written permission before proceeding with disruptive operations.
- E. Nonsmoking Building: Smoking is not permitted within the building or within 25 feet of entrances, operable windows, or outdoor air intakes.
- F. Controlled Substances: Use of tobacco products and other controlled substances on the Project site is not permitted.

#### 1.7 SPECIFICATION AND DRAWING CONVENTIONS

- A. Specification Content: The Specifications use certain conventions for the style of language and the intended meaning of certain terms, words, and phrases when used in particular situations. These conventions are as follows:
1. Imperative mood and streamlined language are generally used in the Specifications. The words "shall," "shall be," or "shall comply with," depending on the context, are implied where a colon (:) is used within a sentence or phrase.
  2. Specification requirements are to be performed by Contractor unless specifically stated otherwise.
- B. Division 01 General Requirements: Requirements of Sections in Division 01 apply to the Work of all Sections in the Specifications.
- C. Drawing Coordination: Requirements for materials and products identified on the Drawings are described in detail in the Specifications. One or more of the following are used on the Drawings to identify materials and products:
1. Terminology: Materials and products are identified by the typical generic terms used in the individual Specifications Sections.
  2. Abbreviations: Materials and products are identified by abbreviations published as part of the U.S. National CAD Standard and scheduled on Drawings.
  3. Keynoting: Materials and products are identified by reference keynotes referencing Specification Section numbers found in this Project Manual.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION 011000

BLANK PAGE

## SECTION 012500 - SUBSTITUTION PROCEDURES

### PART 1 - GENERAL

#### 1.1 SUMMARY

- A. Section includes administrative and procedural requirements for substitutions.
- B. Related Section:
  - 1. Division 01 Section "Product Requirements" for requirements for submitting comparable product submittals for products by listed manufacturers.

#### 1.2 DEFINITIONS

- A. Substitutions: Changes in products, materials, equipment, and methods of construction from those required by the Contract Documents and proposed by Contractor.

#### 1.3 SUBMITTALS

- A. Substitution Requests: Submit three copies of each request for consideration. Identify product or fabrication or installation method to be replaced. Include Specification Section number and title and Drawing numbers and titles.
  - 1. Documentation: Show compliance with requirements for substitutions and the following, as applicable:
    - a. Statement indicating why specified product or fabrication or installation cannot be provided, if applicable.
    - b. Coordination information, including a list of changes or modifications needed to other parts of the Work and to construction performed by Owner and separate contractors, that will be necessary to accommodate proposed substitution.
    - c. Detailed comparison of significant qualities of proposed substitution with those of the Work specified. Include annotated copy of applicable specification section. Significant qualities may include attributes such as performance, weight, size, durability, visual effect, sustainable design characteristics, warranties, and specific features and requirements indicated. Indicate deviations, if any, from the Work specified.
    - d. Product Data, including drawings and descriptions of products and fabrication and installation procedures.
    - e. Samples, where applicable or requested.
    - f. Certificates and qualification data, where applicable or requested.
    - g. List of similar installations for completed projects with project names and addresses and names and addresses of architects and owners.
    - h. Material test reports from a qualified testing agency indicating and interpreting test results for compliance with requirements indicated.

- i. Research reports evidencing compliance with building code in effect for Project, from ICC-ES.
  - j. Detailed comparison of Contractor's construction schedule using proposed substitution with products specified for the Work, including effect on the overall Contract Time. If specified product or method of construction cannot be provided within the Contract Time, include letter from manufacturer, on manufacturer's letterhead, stating date of receipt of purchase order, lack of availability, or delays in delivery.
  - k. Cost information, including a proposal of change, if any, in the Contract Sum.
  - l. Contractor's certification that proposed substitution complies with requirements in the Contract Documents except as indicated in substitution request, is compatible with related materials, and is appropriate for applications indicated.
  - m. Contractor's waiver of rights to additional payment or time that may subsequently become necessary because of failure of proposed substitution to produce indicated results.
2. Architect's Action: If necessary, Architect will request additional information or documentation for evaluation within seven days of receipt of a request for substitution. Architect will notify Contractor of acceptance or rejection of proposed substitution within 15 days of receipt of request, or seven days of receipt of additional information or documentation, whichever is later.
- a. Forms of Acceptance: Change Order, Construction Change Directive, or Architect's Supplemental Instructions for minor changes in the Work.
  - b. Use product specified if Architect does not issue a decision on use of a proposed substitution within time allocated.

#### 1.4 QUALITY ASSURANCE

- A. Compatibility of Substitutions: Investigate and document compatibility of proposed substitution with related products and materials. Engage qualified testing agency to perform compatibility tests recommended by manufacturers.

### PART 2 - PRODUCTS

#### 2.1 SUBSTITUTIONS

- A. Substitutions for Cause: Submit requests for substitution immediately upon discovery of need for change, but not later than 15 days prior to time required for preparation and review of related submittals.
1. Conditions: Architect will consider Contractor's request for substitution when the following conditions are satisfied:
    - a. Requested substitution is consistent with the Contract Documents and will produce indicated results.
    - b. Requested substitution will not adversely affect Contractor's construction schedule.

- c. Requested substitution has received necessary approvals of authorities having jurisdiction.
- d. Requested substitution is compatible with other portions of the Work.
- e. Requested substitution has been coordinated with other portions of the Work.
- f. Requested substitution provides specified warranty.
- g. If requested substitution involves more than one contractor, requested substitution has been coordinated with other portions of the Work, is uniform and consistent, is compatible with other products, and is acceptable to all contractors involved.

B. Substitutions for Convenience: Not allowed.

PART 3 - EXECUTION (Not Used)

END OF SECTION 012500

BLANK PAGE

SECTION 012600 - CONTRACT MODIFICATION PROCEDURES

PART 1 - GENERAL

1.1 SUMMARY

- A. Section includes administrative and procedural requirements for handling and processing Contract modifications.

1.2 MINOR CHANGES IN THE WORK

- A. Architect will issue supplemental instructions authorizing minor changes in the Work, not involving adjustment to the Contract Sum or the Contract Time.

1.3 PROPOSAL REQUESTS

- A. Owner-Initiated Proposal Requests: Architect will issue a detailed description of proposed changes in the Work that may require adjustment to the Contract Sum or the Contract Time. If necessary, the description will include supplemental or revised Drawings and Specifications.

1. Proposal Requests issued by Architect are not instructions either to stop work in progress or to execute the proposed change.
2. Within time specified in Proposal Request or 20 days, when not otherwise specified, after receipt of Proposal Request, submit a quotation estimating cost adjustments to the Contract Sum and the Contract Time necessary to execute the change.

- a. Include a list of quantities of products required or eliminated and unit costs, with total amount of purchases and credits to be made. If requested, furnish survey data to substantiate quantities.
- b. Indicate applicable taxes, delivery charges, equipment rental, and amounts of trade discounts.
- c. Include costs of labor and supervision directly attributable to the change.
- d. Include an updated Contractor's construction schedule that indicates the effect of the change, including, but not limited to, changes in activity duration, start and finish times, and activity relationship. Use available total float before requesting an extension of the Contract Time.

- B. Contractor-Initiated Proposals: If latent or changed conditions require modifications to the Contract, Contractor may initiate a claim by submitting a request for a change to Architect.

1. Include a statement outlining reasons for the change and the effect of the change on the Work. Provide a complete description of the proposed change. Indicate the effect of the proposed change on the Contract Sum and the Contract Time.
2. Include a list of quantities of products required or eliminated and unit costs, with total amount of purchases and credits to be made. If requested, furnish survey data to substantiate quantities.

3. Indicate applicable taxes, delivery charges, equipment rental, and amounts of trade discounts.
4. Include costs of labor and supervision directly attributable to the change.
5. Include an updated Contractor's construction schedule that indicates the effect of the change, including, but not limited to, changes in activity duration, start and finish times, and activity relationship. Use available total float before requesting an extension of the Contract Time.
6. Comply with requirements in Division 01 Section "Substitution Procedures" if the proposed change requires substitution of one product or system for product or system specified.

#### 1.4 CHANGE ORDER PROCEDURES

- A. On Owner's approval of a Proposal Request, Architect will issue a Change Order for signatures of Owner and Contractor.

#### 1.5 CONSTRUCTION CHANGE DIRECTIVE

- A. Construction Change Directive: Architect may issue a Construction Change Directive on Owner's form. Construction Change Directive instructs Contractor to proceed with a change in the Work, for subsequent inclusion in a Change Order.
  1. Construction Change Directive contains a complete description of change in the Work. It also designates method to be followed to determine change in the Contract Sum or the Contract Time.
- B. Documentation: Maintain detailed records on a time and material basis of work required by the Construction Change Directive.
  1. After completion of change, submit an itemized account and supporting data necessary to substantiate cost and time adjustments to the Contract.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION 012600

## SECTION 013100 - PROJECT MANAGEMENT AND COORDINATION

### PART 1 - GENERAL

#### 1.1 SUMMARY

- A. Section includes administrative provisions for coordinating construction operations on Project including, but not limited to, the following:
  - 1. Coordination drawings.
  - 2. Requests for Information (RFIs).
  - 3. Project meetings.

#### 1.2 DEFINITIONS

- A. RFI: Request from Owner, Architect, or Contractor seeking information from each other during construction.

#### 1.3 COORDINATION

- A. Coordination: Coordinate construction operations included in different Sections of the Specifications to ensure efficient and orderly installation of each part of the Work. Coordinate construction operations, included in different Sections, that depend on each other for proper installation, connection, and operation.
  - 1. Schedule construction operations in sequence required to obtain the best results where installation of one part of the Work depends on installation of other components, before or after its own installation.
  - 2. Coordinate installation of different components to ensure maximum performance and accessibility for required maintenance, service, and repair.
  - 3. Make adequate provisions to accommodate items scheduled for later installation.
- B. Prepare memoranda for distribution to each party involved, outlining special procedures required for coordination. Include such items as required notices, reports, and list of attendees at meetings.
  - 1. Prepare similar memoranda for Owner and separate contractors if coordination of their Work is required.

#### 1.4 COORDINATION DRAWINGS

- A. Coordination Drawings, General: Prepare coordination drawings in accordance with requirements in individual Sections, where installation is not completely shown on Shop Drawings, where limited space availability necessitates coordination, or if coordination is required to facilitate integration of products and materials fabricated or installed by more than one entity.

1. Content: Project-specific information, drawn accurately to a scale large enough to indicate and resolve conflicts. Do not base coordination drawings on standard printed data. Include the following information, as applicable:
  - a. Indicate functional and spatial relationships of components of architectural, structural, civil, mechanical, and electrical systems.
  - b. Indicate dimensions shown on the Drawings. Specifically note dimensions that appear to be in conflict with submitted equipment and minimum clearance requirements. Provide alternate sketches to Architect indicating proposed resolution of such conflicts. Minor dimension changes and difficult installations will not be considered changes to the Contract.

B. Coordination Drawing Organization: Organize coordination drawings as follows:

1. Floor Plans and Reflected Ceiling Plans: Show architectural and structural elements, and mechanical, plumbing, fire protection, fire alarm, and electrical Work. Show locations of visible ceiling-mounted devices relative to acoustical ceiling grid.
2. Plenum Space: Indicate subframing for support of ceiling and wall systems, mechanical and electrical equipment, and related Work. Locate components within ceiling plenum to accommodate layout of light fixtures indicated on Drawings.
3. Mechanical Rooms: Provide coordination drawings for mechanical rooms showing plans and elevations of mechanical, plumbing, fire protection, fire alarm, and electrical equipment.
4. Structural Penetrations: Indicate penetrations and openings required for all disciplines.
5. Slab Edge and Embedded Items: Indicate slab edge locations and sizes and locations of embedded items for metal fabrications, sleeves, anchor bolts, bearing plates, angles, door floor closers, slab depressions for floor finishes, curbs and housekeeping pads, and similar items.
6. Review: Architect will review coordination drawings to confirm that the Work is being coordinated, but not for the details of the coordination, which are the Contractor's responsibility.

1.5 REQUESTS FOR INFORMATION (RFIs)

- A. General: Immediately on discovery of the need for additional information or interpretation of the Contract Documents, Contractor shall prepare and submit an RFI in the form specified.
  1. Architect will return RFIs submitted to Architect by other entities controlled by Contractor with no response.
  2. Coordinate and submit RFIs in a prompt manner so as to avoid delays in Contractor's work or work of subcontractors.
- B. Content of the RFI: Include a detailed, legible description of item needing information or interpretation and the following:
  1. Project name.
  2. Project number.
  3. Date.
  4. Name of Contractor.
  5. Name of Architect.

6. RFI number, numbered sequentially.
  7. RFI subject.
  8. Specification Section number and title and related paragraphs, as appropriate.
  9. Drawing number and detail references, as appropriate.
  10. Field dimensions and conditions, as appropriate.
  11. Contractor's suggested resolution. If Contractor's solution(s) impacts the Contract Time or the Contract Sum, Contractor shall state impact in the RFI.
  12. Contractor's signature.
  13. Attachments: Include sketches, descriptions, measurements, photos, Product Data, Shop Drawings, coordination drawings, and other information necessary to fully describe items needing interpretation.
- C. Architect's Action: Architect will review each RFI, determine action required, and respond. Allow seven working days for Architect's response for each RFI. RFIs received by Architect after 1:00 p.m. will be considered as received the following working day.
1. The following RFIs will be returned without action:
    - a. Requests for approval of submittals.
    - b. Requests for approval of substitutions.
    - c. Requests for coordination information already indicated in the Contract Documents.
    - d. Requests for adjustments in the Contract Time or the Contract Sum.
    - e. Requests for interpretation of Architect's actions on submittals.
    - f. Incomplete RFIs or inaccurately prepared RFIs.
  2. Architect's action may include a request for additional information, in which case Architect's time for response will date from time of receipt of additional information.
  3. Architect's action on RFIs that may result in a change to the Contract Time or the Contract Sum may be eligible for Contractor to submit Change Proposal according to Division 01 Section "Contract Modification Procedures."
    - a. If Contractor believes the RFI response warrants change in the Contract Time or the Contract Sum, notify Architect in writing within 10 days of receipt of the RFI response.
- D. On receipt of Architect's action, update the RFI log and immediately distribute the RFI response to affected parties. Review response and notify Architect within seven days if Contractor disagrees with response.
- E. RFI Log: Prepare, maintain, and submit a tabular log of RFIs organized by the RFI number. Submit log weekly.
1. Project name.
  2. Name and address of Contractor.
  3. Name and address of Architect.
  4. RFI number including RFIs that were dropped and not submitted.
  5. RFI description.
  6. Date the RFI was submitted.
  7. Date Architect's response was received.

8. Identification of related Minor Change in the Work, Construction Change Directive, and Proposal Request, as appropriate.
9. Identification of related Field Order, Work Change Directive, and Proposal Request, as appropriate.

#### 1.6 PROJECT MEETINGS

A. General: Schedule and conduct meetings and conferences at Project site, unless otherwise indicated.

1. Attendees: Inform participants and others involved, and individuals whose presence is required, of date and time of each meeting. Notify Owner and Architect of scheduled meeting dates and times.
2. Agenda: Prepare the meeting agenda. Distribute the agenda to all invited attendees.
3. Minutes: Entity responsible for conducting meeting will record significant discussions and agreements achieved. Distribute the meeting minutes to everyone concerned, including Owner and Architect, within three days of the meeting.

B. Preconstruction Conference: Architect will schedule and conduct a preconstruction conference before starting construction, at a time convenient to Owner and Architect, but no later than 15 days after execution of the Agreement.

1. Attendees: Authorized representatives of Owner, Architect, and their consultants; Contractor and its superintendent; major subcontractors; suppliers; and other concerned parties shall attend the conference. Participants at the conference shall be familiar with Project and authorized to conclude matters relating to the Work.
2. Agenda: Discuss items of significance that could affect progress, including the following:
  - a. Tentative construction schedule.
  - b. Phasing.
  - c. Critical work sequencing and long-lead items.
  - d. Designation of key personnel and their duties.
  - e. Procedures for processing field decisions and Change Orders.
  - f. Procedures for RFIs.
  - g. Procedures for testing and inspecting.
  - h. Procedures for processing Applications for Payment.
  - i. Distribution of the Contract Documents.
  - j. Submittal procedures.
  - k. Sustainable design requirements.
  - l. Preparation of record documents.
  - m. Use of the premises and existing building.
  - n. Work restrictions.
  - o. Working hours.
  - p. Owner's occupancy requirements.
  - q. Responsibility for temporary facilities and controls.
  - r. Procedures for moisture and mold control.
  - s. Procedures for disruptions and shutdowns.
  - t. Construction waste management and recycling.
  - u. Parking availability.

- v. Office, work, and storage areas.
  - w. Equipment deliveries and priorities.
  - x. First aid.
  - y. Security.
  - z. Progress cleaning.
3. Minutes: Entity responsible for conducting meeting will record and distribute meeting minutes.
- C. Preinstallation Conferences: Conduct a preinstallation conference at Project site before each construction activity that requires coordination with other construction.
- 1. Attendees: Installer and representatives of manufacturers and fabricators involved in or affected by the installation and its coordination or integration with other materials and installations that have preceded or will follow, shall attend the meeting. Advise Architect of scheduled meeting dates.
  - 2. Agenda: Review progress of other construction activities and preparations for the particular activity under consideration, including requirements for the following:
    - a. Contract Documents.
    - b. Options.
    - c. Related RFIs.
    - d. Related Change Orders.
    - e. Purchases.
    - f. Deliveries.
    - g. Submittals.
    - h. Review of mockups.
    - i. Possible conflicts.
    - j. Compatibility problems.
    - k. Time schedules.
    - l. Weather limitations.
    - m. Manufacturer's written recommendations.
    - n. Warranty requirements.
    - o. Compatibility of materials.
    - p. Acceptability of substrates.
    - q. Temporary facilities and controls.
    - r. Space and access limitations.
    - s. Regulations of authorities having jurisdiction.
    - t. Testing and inspecting requirements.
    - u. Installation procedures.
    - v. Coordination with other work.
    - w. Required performance results.
    - x. Protection of adjacent work.
    - y. Protection of construction and personnel.
  - 3. Record significant conference discussions, agreements, and disagreements, including required corrective measures and actions.
  - 4. Reporting: Distribute minutes of the meeting to each party present and to other parties requiring information.

5. Do not proceed with installation if the conference cannot be successfully concluded. Initiate whatever actions are necessary to resolve impediments to performance of the Work and reconvene the conference at earliest feasible date.

D. Progress Meetings: Conduct progress meetings at weekly intervals.

1. Attendees: In addition to representatives of Owner and Architect, each contractor, subcontractor, supplier, and other entity concerned with current progress or involved in planning, coordination, or performance of future activities shall be represented at these meetings. All participants at the meeting shall be familiar with Project and authorized to conclude matters relating to the Work.
2. Agenda: Review and correct or approve minutes of previous progress meeting. Review other items of significance that could affect progress. Include topics for discussion as appropriate to status of Project.
  - a. Contractor's Construction Schedule: Review progress since the last meeting. Determine whether each activity is on time, ahead of schedule, or behind schedule, in relation to Contractor's construction schedule. Determine how construction behind schedule will be expedited; secure commitments from parties involved to do so. Discuss whether schedule revisions are required to ensure that current and subsequent activities will be completed within the Contract Time.
    - 1) Review schedule for next period.
  - b. Review present and future needs of each entity present, including the following:
    - 1) Interface requirements.
    - 2) Sequence of operations.
    - 3) Status of submittals.
    - 4) Deliveries.
    - 5) Off-site fabrication.
    - 6) Access.
    - 7) Site utilization.
    - 8) Temporary facilities and controls.
    - 9) Progress cleaning.
    - 10) Quality and work standards.
    - 11) Status of correction of deficient items.
    - 12) Field observations.
    - 13) Status of RFIs.
    - 14) Status of proposal requests.
    - 15) Pending changes.
    - 16) Status of Change Orders.
    - 17) Pending claims and disputes.
    - 18) Documentation of information for payment requests.
3. Minutes: Entity responsible for conducting the meeting will record and distribute the meeting minutes to each party present and to parties requiring information.
  - a. Schedule Updating: Revise Contractor's construction schedule after each progress meeting where revisions to the schedule have been made or recognized. Issue revised schedule concurrently with the report of each meeting.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION 013100

BLANK PAGE

## SECTION 013200 - CONSTRUCTION PROGRESS DOCUMENTATION

### PART 1 - GENERAL

#### 1.1 SUMMARY

- A. Section includes administrative and procedural requirements for documenting the progress of construction during performance of the Work, including the following:
1. Contractor's construction schedule.
  2. Daily construction reports.
  3. Field condition reports.

#### 1.2 DEFINITIONS

- A. Activity: A discrete part of a project that can be identified for planning, scheduling, monitoring, and controlling the construction project. Activities included in a construction schedule consume time and resources.
1. Critical Activity: An activity on the critical path that must start and finish on the planned early start and finish times.
  2. Predecessor Activity: An activity that precedes another activity in the network.
  3. Successor Activity: An activity that follows another activity in the network.
- B. CPM: Critical path method, which is a method of planning and scheduling a construction project where activities are arranged based on activity relationships. Network calculations determine when activities can be performed and the critical path of the Project.
- C. Critical Path: The longest connected chain of interdependent activities through the network schedule that establishes the minimum overall Project duration and contains no float.
- D. Float: The measure of leeway in starting and completing an activity.
1. Float time belongs to Owner.

#### 1.3 INFORMATIONAL SUBMITTALS

- A. Format for Submittals: Submit required submittals in the following format:
1. PDF electronic file.
  2. Two paper copies.
- B. Start-up Network Diagram: Of size required to display entire network for entire construction period. Show logic ties for activities.
- C. Contractor's Construction Schedule: Initial schedule, of size required to display entire schedule for entire construction period.

1. Submit a working electronic copy of schedule, using software indicated, and labeled to comply with requirements for submittals. Include type of schedule (initial or updated) and date on label.
- D. CPM Reports: Concurrent with CPM schedule, submit each of the following reports. Format for each activity in reports shall contain activity number, activity description, original duration, remaining duration, early start date, early finish date, late start date, late finish date, and total float in calendar days.
  1. Activity Report: List of all activities sorted by activity number and then early start date, or actual start date if known.
  2. Logic Report: List of preceding and succeeding activities for all activities, sorted in ascending order by activity number and then early start date, or actual start date if known.
  3. Total Float Report: List of all activities sorted in ascending order of total float.
  4. Earnings Report: Compilation of Contractor's total earnings from commencement of the Work the Notice to Proceed until most recent Application for Payment.
- E. Daily Construction Reports: Submit at weekly intervals.
- F. Field Condition Reports: Submit at time of discovery of differing conditions.

#### 1.4 COORDINATION

- A. Coordinate preparation and processing of schedules and reports with performance of construction activities and with scheduling and reporting of separate contractors.
- B. Coordinate Contractor's construction schedule with the schedule of values, list of subcontracts, submittal schedule, progress reports, payment requests, and other required schedules and reports.
  1. Secure time commitments for performing critical elements of the Work from entities involved.
  2. Coordinate each construction activity in the network with other activities and schedule them in proper sequence.

### PART 2 - PRODUCTS

#### 2.1 CONTRACTOR'S CONSTRUCTION SCHEDULE, GENERAL

- A. Time Frame: Extend schedule from date established for the Notice of Award to date of Substantial Completion.
  1. Contract completion date shall not be changed by submission of a schedule that shows an early completion date, unless specifically authorized by Change Order.
- B. Activities: Treat each story or separate area as a separate numbered activity for each principal element of the Work. Comply with the following:

1. Activity Duration: Define activities so no activity is longer than 20 days, unless specifically allowed by Architect.
  2. Procurement Activities: Include procurement process activities for the following long lead items and major items, requiring a cycle of more than 60 days, as separate activities in schedule. Procurement cycle activities include, but are not limited to, submittals, approvals, purchasing, fabrication, and delivery.
  3. Submittal Review Time: Include review and resubmittal times indicated in Division 01 Section "Submittal Procedures" in schedule. Coordinate submittal review times in Contractor's construction schedule with submittal schedule.
  4. Startup and Testing Time: Include not less than 15 days for startup and testing.
  5. Substantial Completion: Indicate completion in advance of date established for Substantial Completion, and allow time for Architect's administrative procedures necessary for certification of Substantial Completion.
  6. Punch List and Final Completion: Include not more than 30 days for punch list and final completion.
- C. Constraints: Include constraints and work restrictions indicated in the Contract Documents and as follows in schedule, and show how the sequence of the Work is affected.
1. Phasing: Arrange list of activities on schedule by phase.
  2. Work under More Than One Contract: Include a separate activity for each contract.
  3. Work by Owner: Include a separate activity for each portion of the Work performed by Owner.
  4. Work Restrictions: Show the effect of the following items on the schedule:
    - a. Coordination with existing construction.
    - b. Limitations of continued occupancies.
    - c. Uninterruptible services.
    - d. Partial occupancy before Substantial Completion.
    - e. Use of premises restrictions.
    - f. Provisions for future construction.
    - g. Seasonal variations.
    - h. Environmental control.
  5. Work Stages: Indicate important stages of construction for each major portion of the Work.
- D. Milestones: Include milestones indicated in the Contract Documents in schedule, including, but not limited to, the Notice to Proceed, Substantial Completion, and final completion.
- E. Upcoming Work Summary: Prepare summary report indicating activities scheduled to occur or commence prior to submittal of next schedule update. Summarize the following issues:
1. Unresolved issues.
  2. Unanswered RFIs.
  3. Rejected or unreturned submittals.
  4. Notations on returned submittals.
- F. Recovery Schedule: When periodic update indicates the Work is 14 or more calendar days behind the current approved schedule, submit a separate recovery schedule indicating means by which Contractor intends to regain compliance with the schedule.

- G. Computer Scheduling Software: Prepare schedules using current version of a program that has been developed specifically to manage construction schedules.

## 2.2 CONTRACTOR'S CONSTRUCTION SCHEDULE (GANTT CHART)

- A. Gantt-Chart Schedule: Submit a comprehensive, fully developed, horizontal Gantt-chart-type, Contractor's construction schedule within 30 days of date established for commencement of the Work.
- B. Preparation: Indicate each significant construction activity separately. Identify first workday of each week with a continuous vertical line.
  - 1. For construction activities that require three months or longer to complete, indicate an estimated completion percentage in 10 percent increments within time bar.

## 2.3 REPORTS

- A. Daily Construction Reports: Prepare a daily construction report recording the following information concerning events at Project site:
  - 1. List of subcontractors at Project site.
  - 2. List of separate contractors at Project site.
  - 3. Approximate count of personnel at Project site.
  - 4. Equipment at Project site.
  - 5. Material deliveries.
  - 6. High and low temperatures and general weather conditions, including presence of rain or snow.
  - 7. Accidents.
  - 8. Meetings and significant decisions.
  - 9. Unusual events.
  - 10. Stoppages, delays, shortages, and losses.
  - 11. Meter readings and similar recordings.
  - 12. Emergency procedures.
  - 13. Orders and requests of authorities having jurisdiction.
  - 14. Change Orders received and implemented.
  - 15. Construction Change Directives received and implemented.
  - 16. Services connected and disconnected.
  - 17. Equipment or system tests and startups.
  - 18. Partial completions and occupancies.
  - 19. Substantial Completions authorized.
- B. Field Condition Reports: Immediately on discovery of a difference between field conditions and the Contract Documents, prepare and submit a detailed report. Submit with a Request for Information. Include a detailed description of the differing conditions, together with recommendations for changing the Contract Documents.

PART 3 - EXECUTION

3.1 CONTRACTOR'S CONSTRUCTION SCHEDULE

- A. Contractor's Construction Schedule Updating: At monthly intervals, update schedule to reflect actual construction progress and activities. Issue schedule one week before each regularly scheduled progress meeting.
1. Revise schedule immediately after each meeting or other activity where revisions have been recognized or made. Issue updated schedule concurrently with the report of each such meeting.
  2. Include a report with updated schedule that indicates every change, including, but not limited to, changes in logic, durations, actual starts and finishes, and activity durations.
  3. As the Work progresses, indicate final completion percentage for each activity.
- B. Distribution: Distribute copies of approved schedule to Architect Owner, separate contractors, testing and inspecting agencies, and other parties identified by Contractor with a need-to-know schedule responsibility.
1. Post copies in Project meeting rooms and temporary field offices.
  2. When revisions are made, distribute updated schedules to the same parties and post in the same locations. Delete parties from distribution when they have completed their assigned portion of the Work and are no longer involved in performance of construction activities.

END OF SECTION 013200

BLANK PAGE

## SECTION 013300 - SUBMITTAL PROCEDURES

### PART 1 - GENERAL

#### 1.1 SUMMARY

- A. Section includes requirements for the submittal schedule and administrative and procedural requirements for submitting Shop Drawings, Product Data, Samples, and other submittals.
- B. Related Sections:
  - 1. Division 01 Section "Construction Progress Documentation" for submitting schedules and reports, including Contractor's construction schedule.
  - 2. Division 01 Section "Operation and Maintenance Data" for submitting operation and maintenance manuals.
  - 3. Division 01 Section "Project Record Documents" for submitting record Drawings, record Specifications, and record Product Data.

#### 1.2 DEFINITIONS

- A. Action Submittals: Written and graphic information and physical samples that require Architect's responsive action.
- B. Informational Submittals: Written and graphic information and physical samples that do not require Architect's responsive action. Submittals may be rejected for not complying with requirements.

#### 1.3 ACTION SUBMITTALS

- A. Submittal Schedule: Submit a schedule of submittals, arranged in chronological order by dates required by construction schedule. Include time required for review, ordering, manufacturing, fabrication, and delivery when establishing dates. Include additional time required for making corrections or modifications to submittals noted by the Architect and additional time for handling and reviewing submittals required by those corrections.

#### 1.4 SUBMITTAL ADMINISTRATIVE REQUIREMENTS

- A. Architect's Digital Data Files: Electronic copies of CAD Drawings of the Contract Drawings will be provided by Architect for Contractor's use in preparing submittals.
  - 1. Architect will furnish Contractor one set of digital data drawing files of the Contract Drawings for use in preparing Shop Drawings and Project record drawings.
    - a. Architect makes no representations as to the accuracy or completeness of digital data drawing files as they relate to the Contract Drawings.

- b. Contractor shall execute a data licensing agreement in the form of AIA Document C106, Digital Data Licensing Agreement.
- B. Coordination: Coordinate preparation and processing of submittals with performance of construction activities.
1. Coordinate each submittal with fabrication, purchasing, testing, delivery, other submittals, and related activities that require sequential activity.
  2. Coordinate transmittal of different types of submittals for related parts of the Work so processing will not be delayed because of need to review submittals concurrently for coordination.
    - a. Architect reserves the right to withhold action on a submittal requiring coordination with other submittals until related submittals are received.
- C. Processing Time: Allow time for submittal review, including time for resubmittals, as follows. Time for review shall commence on Architect's receipt of submittal. No extension of the Contract Time will be authorized because of failure to transmit submittals enough in advance of the Work to permit processing, including resubmittals.
1. Initial Review: Allow 15 days for initial review of each submittal. Allow additional time if coordination with subsequent submittals is required. Architect will advise Contractor when a submittal being processed must be delayed for coordination.
  2. Intermediate Review: If intermediate submittal is necessary, process it in same manner as initial submittal.
  3. Resubmittal Review: Allow 15 days for review of each resubmittal.
- D. Identification and Information: Place a permanent label or title block on each paper copy submittal item for identification.
1. Indicate name of firm or entity that prepared each submittal on label or title block.
  2. Provide a space approximately 6 by 8 inches on label or beside title block to record Contractor's review and approval markings and action taken by Architect.
  3. Include the following information for processing and recording action taken:
    - a. Project name.
    - b. Date.
    - c. Name of Architect.
    - d. Name of Construction Manager.
    - e. Name of Contractor.
    - f. Name of subcontractor.
    - g. Name of supplier.
    - h. Name of manufacturer.
    - i. Submittal number or other unique identifier, including revision identifier.
      - 1) Submittal number shall use Specification Section number followed by a decimal point and then a sequential number (e.g., 061000.01). Resubmittals shall include an alphabetic suffix after another decimal point (e.g., 061000.01.A).
    - j. Number and title of appropriate Specification Section.

- k. Drawing number and detail references, as appropriate.
  - l. Location(s) where product is to be installed, as appropriate.
  - m. Other necessary identification.
- E. Identification and Information: Identify and incorporate information in each electronic submittal file as follows:
  1. Assemble complete submittal package into a single indexed file with links enabling navigation to each item.
  2. Name file with submittal number or other unique identifier, including revision identifier.
    - a. File name shall use project identifier and Specification Section number followed by a decimal point and then a sequential number (e.g., LNHS-061000.01). Resubmittals shall include an alphabetic suffix after another decimal point (e.g., LNHS-061000.01.A).
  3. Provide means for insertion to permanently record Contractor's review and approval markings and action taken by Architect.
  4. Include the following information on an inserted cover sheet:
    - a. Project name.
    - b. Date.
    - c. Name and address of Architect.
    - d. Name of Construction Manager.
    - e. Name of Contractor.
    - f. Name of firm or entity that prepared submittal.
    - g. Name of subcontractor.
    - h. Name of supplier.
    - i. Name of manufacturer.
    - j. Number and title of appropriate Specification Section.
    - k. Drawing number and detail references, as appropriate.
    - l. Location(s) where product is to be installed, as appropriate.
    - m. Related physical samples submitted directly.
    - n. Other necessary identification.
- F. Options: Identify options requiring selection by the Architect.
- G. Deviations: Identify deviations from the Contract Documents on submittals.
- H. Additional Paper Copies: Unless additional copies are required for final submittal, and unless Architect observes noncompliance with provisions in the Contract Documents, initial submittal may serve as final submittal.
  1. Submit one copy of submittal to concurrent reviewer in addition to specified number of copies to Architect.
- I. Transmittal: Assemble each submittal individually and appropriately for transmittal and handling. Transmit each submittal using a transmittal form. Architect will return submittals, without review, received from sources other than Contractor.
- J. Resubmittals: Make resubmittals in same form and number of copies as initial submittal.

1. Note date and content of previous submittal.
  2. Note date and content of revision in label or title block and clearly indicate extent of revision.
  3. Resubmit submittals until they are marked with approval notation from Architect's action stamp.
- K. Distribution: Furnish copies of final submittals to manufacturers, subcontractors, suppliers, fabricators, installers, authorities having jurisdiction, and others as necessary for performance of construction activities. Show distribution on transmittal forms.
- L. Use for Construction: Use only final submittals that are marked with approval notation from Architect's action stamp.

## PART 2 - PRODUCTS

### 2.1 SUBMITTAL PROCEDURES

#### A. General Submittal Procedure Requirements:

1. Submit electronic submittals via email as PDF electronic files.
  - a. Architect will return annotated file. Annotate and retain one copy of file as an electronic Project record document file.
2. Action Submittals: Submit three paper copies of each submittal, unless otherwise indicated. Architect will return two copies.
3. Informational Submittals: Submit two paper copies of each submittal, unless otherwise indicated. Architect will not return copies.
4. Closeout Submittals and Maintenance Material Submittals: Comply with requirements specified in Division 01 Section "Closeout Procedures."
5. Certificates and Certifications Submittals: Provide a statement that includes signature of entity responsible for preparing certification. Certificates and certifications shall be signed by an officer or other individual authorized to sign documents on behalf of that entity.
6. Test and Inspection Reports Submittals: Comply with requirements specified in Division 01 Section "Quality Requirements."

#### B. Product Data: Collect information into a single submittal for each element of construction and type of product or equipment.

1. If information must be specially prepared for submittal because standard published data are not suitable for use, submit as Shop Drawings, not as Product Data.
2. Mark each copy of each submittal to show which products and options are applicable.
3. Include the following information, as applicable:
  - a. Manufacturer's catalog cuts.
  - b. Manufacturer's product specifications.
  - c. Standard color charts.

- d. Statement of compliance with specified referenced standards.
  - e. Testing by recognized testing agency.
  - f. Application of testing agency labels and seals.
  - g. Notation of coordination requirements.
  - h. Availability and delivery time information.
4. Submit Product Data before or concurrent with Samples.
  5. Submit Product Data in the following format:
    - a. PDF electronic file.
    - b. Three paper copies of Product Data, unless otherwise indicated. Architect will return two copies.
- C. Shop Drawings: Prepare Project-specific information, drawn accurately to scale. Do not base Shop Drawings on reproductions of the Contract Documents or standard printed data, unless submittal based upon Architect's digital data drawing files is otherwise permitted.
1. Preparation: Fully illustrate requirements in the Contract Documents. Include the following information, as applicable:
    - a. Identification of products.
    - b. Schedules.
    - c. Compliance with specified standards.
    - d. Notation of coordination requirements.
    - e. Notation of dimensions established by field measurement.
    - f. Relationship and attachment to adjoining construction clearly indicated.
    - g. Seal and signature of professional engineer if specified.
  2. Sheet Size: Except for templates, patterns, and similar full-size drawings, submit Shop Drawings on sheets at least 8-1/2 by 11 inches but no larger than 24 by 36 inches.
  3. Submit Shop Drawings in the following format:
    - a. Three opaque copies of each submittal. Architect will retain two copies; remainder will be returned.
- D. Samples: Submit Samples for review of kind, color, pattern, and texture for a check of these characteristics with other elements and for a comparison of these characteristics between submittal and actual component as delivered and installed.
1. Transmit Samples that contain multiple, related components such as accessories together in one submittal package.
  2. Identification: Attach label on unexposed side of Samples that includes the following:
    - a. Generic description of Sample.
    - b. Product name and name of manufacturer.
    - c. Sample source.
    - d. Number and title of applicable Specification Section.
  3. Disposition: Maintain sets of approved Samples at Project site, available for quality-control comparisons throughout the course of construction activity. Sample sets may be used to determine final acceptance of construction associated with each set.

- a. Samples that may be incorporated into the Work are indicated in individual Specification Sections. Such Samples must be in an undamaged condition at time of use.
  - b. Samples not incorporated into the Work, or otherwise designated as Owner's property, are the property of Contractor.
4. Samples for Initial Selection: Submit manufacturer's color charts consisting of units or sections of units showing the full range of colors, textures, and patterns available.
- a. Number of Samples: Submit one full set(s) of available choices where color, pattern, texture, or similar characteristics are required to be selected from manufacturer's product line. Architect will return submittal with options selected.
5. Samples for Verification: Submit full-size units or Samples of size indicated, prepared from same material to be used for the Work, cured and finished in manner specified, and physically identical with material or product proposed for use, and that show full range of color and texture variations expected. Samples include, but are not limited to, the following: partial sections of manufactured or fabricated components; small cuts or containers of materials; complete units of repetitively used materials; swatches showing color, texture, and pattern; color range sets; and components used for independent testing and inspection.
- a. Number of Samples: Submit three sets of Samples. Architect and Construction Manager will retain two Sample sets; remainder will be returned. Mark up and retain one returned Sample set as a Project record sample.
    - 1) If variation in color, pattern, texture, or other characteristic is inherent in material or product represented by a Sample, submit at least three sets of paired units that show approximate limits of variations.
- E. Product Schedule: As required in individual Specification Sections, prepare a written summary indicating types of products required for the Work and their intended location. Include the following information in tabular form:
1. Submit product schedule in the following format:
    - a. PDF electronic file.
- F. Contractor's Construction Schedule: Comply with requirements specified in Division 01 Section "Construction Progress Documentation."
- G. Application for Payment: Comply with requirements specified in Division 01 Section "Payment Procedures."
- H. Schedule of Values: Comply with requirements specified in Division 01 Section "Payment Procedures."
- I. Subcontract List: Prepare a written summary identifying individuals or firms proposed for each portion of the Work, including those who are to furnish products or equipment fabricated to a special design.

1. Submit subcontract list in the following format:
  - a. PDF electronic file.
- J. Coordination Drawings: Comply with requirements specified in Division 01 Section "Project Management and Coordination."
- K. Qualification Data: Prepare written information that demonstrates capabilities and experience of firm or person. Include lists of completed projects with project names and addresses, contact information of architects and owners, and other information specified.
- L. Welding Certificates: Prepare written certification that welding procedures and personnel comply with requirements in the Contract Documents. Submit record of Welding Procedure Specification and Procedure Qualification Record on American Welding Society (AWS) forms. Include names of firms and personnel certified.
- M. Installer Certificates: Submit written statements on manufacturer's letterhead certifying that Installer complies with requirements in the Contract Documents and, where required, is authorized by manufacturer for this specific Project.
- N. Manufacturer Certificates: Submit written statements on manufacturer's letterhead certifying that manufacturer complies with requirements in the Contract Documents. Include evidence of manufacturing experience where required.
- O. Product Certificates: Submit written statements on manufacturer's letterhead certifying that product complies with requirements in the Contract Documents.
- P. Material Certificates: Submit written statements on manufacturer's letterhead certifying that material complies with requirements in the Contract Documents.
- Q. Material Test Reports: Submit reports written by a qualified testing agency, on testing agency's standard form, indicating and interpreting test results of material for compliance with requirements in the Contract Documents.
- R. Product Test Reports: Submit written reports indicating current product produced by manufacturer complies with requirements in the Contract Documents. Base reports on evaluation of tests performed by manufacturer and witnessed by a qualified testing agency, or on comprehensive tests performed by a qualified testing agency.
- S. Research Reports: Submit written evidence, from a model code organization acceptable to authorities having jurisdiction, that product complies with building code in effect for Project.
- T. Schedule of Tests and Inspections: Comply with requirements specified in Division 01 Section "Quality Requirements."
- U. Preconstruction Test Reports: Submit reports written by a qualified testing agency, on testing agency's standard form, indicating and interpreting results of tests performed before installation of product, for compliance with performance requirements in the Contract Documents.
- V. Compatibility Test Reports: Submit reports written by a qualified testing agency, on testing agency's standard form, indicating and interpreting results of compatibility tests performed

before installation of product. Include written recommendations for primers and substrate preparation needed for adhesion.

- W. Field Test Reports: Submit reports indicating and interpreting results of field tests performed either during installation of product or after product is installed in its final location, for compliance with requirements in the Contract Documents.
- X. Maintenance Data: Comply with requirements specified in Division 01 Section "Operation and Maintenance Data."
- Y. Design Data: Prepare and submit written and graphic information, including, but not limited to, performance and design criteria, list of applicable codes and regulations, and calculations. Include list of assumptions and other performance and design criteria and a summary of loads. Include load diagrams if applicable. Provide name and version of software, if any, used for calculations. Include page numbers.

### PART 3 - EXECUTION

#### 3.1 CONTRACTOR'S REVIEW

- A. Action and Informational Submittals: Review each submittal and check for coordination with other Work of the Contract and for compliance with the Contract Documents. Note corrections and field dimensions. Mark with approval stamp before submitting to Architect.
- B. Project Closeout and Maintenance/Material Submittals: Refer to requirements in Division 01 Section "Closeout Procedures."
- C. Approval Stamp: Stamp each submittal with a uniform, approval stamp. Include Project name and location, submittal number, Specification Section title and number, name of reviewer, date of Contractor's approval, and statement certifying that submittal has been reviewed, checked, and approved for compliance with the Contract Documents.

#### 3.2 ARCHITECT'S ACTION

- A. General: Architect will not review submittals that do not bear Contractor's approval stamp and will return them without action.
- B. Action Submittals: Architect will review each submittal, make marks to indicate corrections or modifications required, and return it. Architect will stamp each submittal with an action stamp and will mark stamp appropriately to indicate action.
- C. Informational Submittals: Architect will review each submittal and will not return it, or will return it if it does not comply with requirements. Architect will forward each submittal to appropriate party.
- D. Incomplete submittals are not acceptable, will be considered nonresponsive, and will be returned without review.

- E. Submittals not required by the Contract Documents may not be reviewed and may be discarded.

END OF SECTION 013300

BLANK PAGE

## SECTION 014000 - QUALITY REQUIREMENTS

### PART 1 - GENERAL

#### 1.1 SUMMARY

- A. Section includes administrative and procedural requirements for quality assurance and quality control.
- B. Testing and inspecting services are required to verify compliance with requirements specified or indicated. These services do not relieve Contractor of responsibility for compliance with the Contract Document requirements.
  - 1. Specified tests, inspections, and related actions do not limit Contractor's other quality-assurance and -control procedures that facilitate compliance with the Contract Document requirements.
  - 2. Requirements for Contractor to provide quality-assurance and -control services required by Architect, Owner, or authorities having jurisdiction are not limited by provisions of this Section.
- C. Related Sections:
  - 1. Divisions 02 through 49 Sections for specific test and inspection requirements.

#### 1.2 DEFINITIONS

- A. Quality-Assurance Services: Activities, actions, and procedures performed before and during execution of the Work to guard against defects and deficiencies and substantiate that proposed construction will comply with requirements.
- B. Quality-Control Services: Tests, inspections, procedures, and related actions during and after execution of the Work to evaluate that actual products incorporated into the Work and completed construction comply with requirements. Services do not include contract enforcement activities performed by Architect.
- C. Preconstruction Testing: Tests and inspections performed specifically for the Project before products and materials are incorporated into the Work to verify performance or compliance with specified criteria.
- D. Product Testing: Tests and inspections that are performed by an NRTL, an NVLAP, or a testing agency qualified to conduct product testing and acceptable to authorities having jurisdiction, to establish product performance and compliance with specified requirements.
- E. Source Quality-Control Testing: Tests and inspections that are performed at the source, i.e., plant, mill, factory, or shop.

- F. Field Quality-Control Testing: Tests and inspections that are performed on-site for installation of the Work and for completed Work.
- G. Testing Agency: An entity engaged to perform specific tests, inspections, or both. Testing laboratory shall mean the same as testing agency.
- H. Installer/Applicator/Erector: Contractor or another entity engaged by Contractor as an employee, Subcontractor, or Sub-subcontractor, to perform a particular construction operation, including installation, erection, application, and similar operations.
  - 1. Use of trade-specific terminology in referring to a trade or entity does not require that certain construction activities be performed by accredited or unionized individuals, or that requirements specified apply exclusively to specific trade or trades.
- I. Experienced: When used with an entity or individual, "experienced" means having successfully completed a minimum of five previous projects similar in nature, size, and extent to this Project; being familiar with special requirements indicated; and having complied with requirements of authorities having jurisdiction.

### 1.3 CONFLICTING REQUIREMENTS

- A. Referenced Standards: If compliance with two or more standards is specified and the standards establish different or conflicting requirements for minimum quantities or quality levels, comply with the most stringent requirement. Refer conflicting requirements that are different, but apparently equal, to Architect for a decision before proceeding.
- B. Minimum Quantity or Quality Levels: The quantity or quality level shown or specified shall be the minimum provided or performed. The actual installation may comply exactly with the minimum quantity or quality specified, or it may exceed the minimum within reasonable limits. To comply with these requirements, indicated numeric values are minimum or maximum, as appropriate, for the context of requirements. Refer uncertainties to Architect for a decision before proceeding.

### 1.4 INFORMATIONAL SUBMITTALS

- A. Contractor's Statement of Responsibility: When required by authorities having jurisdiction, submit copy of written statement of responsibility sent to authorities having jurisdiction before starting work on the following systems.
  - 1. Seismic-force resisting system, designated seismic system, or component listed in the designated seismic system quality assurance plan prepared by the Architect.
  - 2. Main wind-force resisting system or a wind-resisting component listed in the wind-force-resisting system quality assurance plan prepared by the Architect.
- B. Testing Agency Qualifications: For testing agencies specified in "Quality Assurance" Article to demonstrate their capabilities and experience. Include proof of qualifications in the form of a recent report on the inspection of the testing agency by a recognized authority.

## 1.5 REPORTS AND DOCUMENTS

- A. Test and Inspection Reports: Prepare and submit certified written reports specified in other Sections. Include the following:
1. Date of issue.
  2. Project title and number.
  3. Name, address, and telephone number of testing agency.
  4. Dates and locations of samples and tests or inspections.
  5. Names of individuals making tests and inspections.
  6. Description of the Work and test and inspection method.
  7. Identification of product and Specification Section.
  8. Complete test or inspection data.
  9. Test and inspection results and an interpretation of test results.
  10. Record of temperature and weather conditions at time of sample taking and testing and inspecting.
  11. Comments or professional opinion on whether tested or inspected Work complies with the Contract Document requirements.
  12. Name and signature of laboratory inspector.
  13. Recommendations on retesting and reinspecting.
- B. Manufacturer's Field Reports: Prepare written information documenting tests and inspections specified in other Sections. Include the following:
1. Name, address, and telephone number of representative making report.
  2. Statement on condition of substrates and their acceptability for installation of product.
  3. Summary of installation procedures being followed, whether they comply with requirements and, if not, what corrective action was taken.
  4. Results of operational and other tests and a statement of whether observed performance complies with requirements.
  5. Other required items indicated in individual Specification Sections.
- C. Permits, Licenses, and Certificates: For Owner's records, submit copies of permits, licenses, certifications, inspection reports, releases, jurisdictional settlements, notices, receipts for fee payments, judgments, correspondence, records, and similar documents, established for compliance with standards and regulations bearing on performance of the Work.

## 1.6 QUALITY ASSURANCE

- A. General: Qualifications paragraphs in this article establish the minimum qualification levels required; individual Specification Sections specify additional requirements.
- B. Manufacturer Qualifications: A firm experienced in manufacturing products or systems similar to those indicated for this Project and with a record of successful in-service performance, as well as sufficient production capacity to produce required units.
- C. Fabricator Qualifications: A firm experienced in producing products similar to those indicated for this Project and with a record of successful in-service performance, as well as sufficient production capacity to produce required units.

- D. **Installer Qualifications:** A firm or individual experienced in installing, erecting, or assembling work similar in material, design, and extent to that indicated for this Project, whose work has resulted in construction with a record of successful in-service performance.
- E. **Manufacturer's Representative Qualifications:** An authorized representative of manufacturer who is trained and approved by manufacturer to observe and inspect installation of manufacturer's products that are similar in material, design, and extent to those indicated for this Project.
- F. **Preconstruction Testing:** Where testing agency is indicated to perform preconstruction testing for compliance with specified requirements for performance and test methods, comply with the following:
  - 1. **Contractor responsibilities include the following:**
    - a. Provide test specimens representative of proposed products and construction.
    - b. Submit specimens in a timely manner with sufficient time for testing and analyzing results to prevent delaying the Work.
    - c. Build laboratory mockups at testing facility using personnel, products, and methods of construction indicated for the completed Work.
    - d. When testing is complete, remove test specimens, assemblies, mockups; do not reuse products on Project.
  - 2. **Testing Agency Responsibilities:** Submit a certified written report of each test, inspection, and similar quality-assurance service to Architect, with copy to Contractor. Interpret tests and inspections and state in each report whether tested and inspected work complies with or deviates from the Contract Documents.

#### 1.7 QUALITY CONTROL

- A. **Owner Responsibilities:** Where quality-control services are indicated as Owner's responsibility, Owner will engage a qualified testing agency to perform these services.
  - 1. Owner will furnish Contractor with names, addresses, and telephone numbers of testing agencies engaged and a description of types of testing and inspecting they are engaged to perform.
  - 2. Costs for retesting and reinspecting construction that replaces or is necessitated by work that failed to comply with the Contract Documents will be charged to Contractor.
- B. **Contractor Responsibilities:** Tests and inspections not explicitly assigned to Owner are Contractor's responsibility. Perform additional quality-control activities required to verify that the Work complies with requirements, whether specified or not.
  - 1. Where services are indicated as Contractor's responsibility, engage a qualified testing agency to perform these quality-control services.
    - a. Contractor shall not employ same entity engaged by Owner, unless agreed to in writing by Owner.

2. Notify testing agencies at least 24 hours in advance of time when Work that requires testing or inspecting will be performed.
  3. Where quality-control services are indicated as Contractor's responsibility, submit a certified written report, in duplicate, of each quality-control service.
  4. Testing and inspecting requested by Contractor and not required by the Contract Documents are Contractor's responsibility.
  5. Submit additional copies of each written report directly to authorities having jurisdiction, when they so direct.
- C. **Manufacturer's Field Services:** Where indicated, engage a manufacturer's representative to observe and inspect the Work. Manufacturer's representative's services include examination of substrates and conditions, verification of materials, inspection of completed portions of the Work, and submittal of written reports.
- D. **Retesting/Reinspecting:** Regardless of whether original tests or inspections were Contractor's responsibility, provide quality-control services, including retesting and reinspecting, for construction that replaced Work that failed to comply with the Contract Documents.
- E. **Testing Agency Responsibilities:** Cooperate with Architect and Contractor in performance of duties. Provide qualified personnel to perform required tests and inspections.
1. Notify Architect and Contractor promptly of irregularities or deficiencies observed in the Work during performance of its services.
  2. Determine the location from which test samples will be taken and in which in-situ tests are conducted.
  3. Conduct and interpret tests and inspections and state in each report whether tested and inspected work complies with or deviates from requirements.
  4. Submit a certified written report, in duplicate, of each test, inspection, and similar quality-control service through Contractor.
  5. Do not release, revoke, alter, or increase the Contract Document requirements or approve or accept any portion of the Work.
  6. Do not perform any duties of Contractor.
- F. **Associated Services:** Cooperate with agencies performing required tests, inspections, and similar quality-control services, and provide reasonable auxiliary services as requested. Notify agency sufficiently in advance of operations to permit assignment of personnel. Provide the following:
1. Access to the Work.
  2. Incidental labor and facilities necessary to facilitate tests and inspections.
  3. Adequate quantities of representative samples of materials that require testing and inspecting. Assist agency in obtaining samples.
  4. Facilities for storage and field curing of test samples.
  5. Delivery of samples to testing agencies.
  6. Preliminary design mix proposed for use for material mixes that require control by testing agency.
  7. Security and protection for samples and for testing and inspecting equipment at Project site.

- G. Coordination: Coordinate sequence of activities to accommodate required quality-assurance and -control services with a minimum of delay and to avoid necessity of removing and replacing construction to accommodate testing and inspecting.
  - 1. Schedule times for tests, inspections, obtaining samples, and similar activities.

#### 1.8 SPECIAL TESTS AND INSPECTIONS

- A. Special Tests and Inspections: Owner will engage a qualified special inspector to conduct special tests and inspections required by authorities having jurisdiction as the responsibility of Owner, and as follows:

#### PART 2 - PRODUCTS (Not Used)

#### PART 3 - EXECUTION

##### 3.1 REPAIR AND PROTECTION

- A. General: On completion of testing, inspecting, sample taking, and similar services, repair damaged construction and restore substrates and finishes.
  - 1. Provide materials and comply with installation requirements specified in other Specification Sections or matching existing substrates and finishes. Restore patched areas and extend restoration into adjoining areas with durable seams that are as invisible as possible. Comply with the Contract Document requirements for cutting and patching in Division 01 Section "Execution."
- B. Protect construction exposed by or for quality-control service activities.
- C. Repair and protection are Contractor's responsibility, regardless of the assignment of responsibility for quality-control services.

END OF SECTION 014000

SECTION 014200 - REFERENCES

PART 1 - GENERAL

1.1 DEFINITIONS

- A. General: Basic Contract definitions are included in the Conditions of the Contract.
- B. "Approved": When used to convey Architect's action on Contractor's submittals, applications, and requests, "approved" is limited to Architect's duties and responsibilities as stated in the Conditions of the Contract.
- C. "Directed": A command or instruction by Architect. Other terms including "requested," "authorized," "selected," "required," and "permitted" have the same meaning as "directed."
- D. "Indicated": Requirements expressed by graphic representations or in written form on Drawings, in Specifications, and in other Contract Documents. Other terms including "shown," "noted," "scheduled," and "specified" have the same meaning as "indicated."
- E. "Regulations": Laws, ordinances, statutes, and lawful orders issued by authorities having jurisdiction, and rules, conventions, and agreements within the construction industry that control performance of the Work.
- F. "Furnish": Supply and deliver to Project site, ready for unloading, unpacking, assembly, installation, and similar operations.
- G. "Install": Operations at Project site including unloading, temporarily storing, unpacking, assembling, erecting, placing, anchoring, applying, working to dimension, finishing, curing, protecting, cleaning, and similar operations.
- H. "Provide": Furnish and install, complete and ready for the intended use.
- I. "Project Site": Space available for performing construction activities. The extent of Project site is shown on Drawings and may or may not be identical with the description of the land on which Project is to be built.

1.2 INDUSTRY STANDARDS

- A. Applicability of Standards: Unless the Contract Documents include more stringent requirements, applicable construction industry standards have the same force and effect as if bound or copied directly into the Contract Documents to the extent referenced. Such standards are made a part of the Contract Documents by reference.
- B. Copies of Standards: Each entity engaged in construction on Project should be familiar with industry standards applicable to its construction activity. Copies of applicable standards are not bound with the Contract Documents.

1. Where copies of standards are needed to perform a required construction activity, obtain copies directly from publication source.

### 1.3 ABBREVIATIONS AND ACRONYMS

- A. Industry Organizations: Where abbreviations and acronyms are used in Specifications or other Contract Documents, they shall mean the recognized name of the entities indicated in Gale's "Encyclopedia of Associations" or in Columbia Books' "National Trade & Professional Associations of the United States."
- B. Industry Organizations: Where abbreviations and acronyms are used in Specifications or other Contract Documents, they shall mean the recognized name of the entities in the following list.

AGC	Associated General Contractors of America (The)
AIA	American Institute of Architects (The)
ALSC	American Lumber Standard Committee, Incorporated
ANSI	American National Standards Institute
ASTM	ASTM International (American Society for Testing and Materials International)
AWPA	American Wood Protection Association (Formerly: American Wood Preservers' Association)
CRRC	Cool Roof Rating Council
CSI	Construction Specifications Institute (The)
FM Global	FM Global (Formerly: FMG - FM Global)
NFPA	NFPA (National Fire Protection Association)
NRCA	National Roofing Contractors Association
SPRI	Single Ply Roofing Industry
WSRCA	Western States Roofing Contractors Association
WWPA	Western Wood Products Association

- C. Code Agencies: Where abbreviations and acronyms are used in Specifications or other Contract Documents, they shall mean the recognized name of the entities in the following list.

ICC International Code Council

ICC-ES ICC Evaluation Service, Inc.

D. Federal Government Agencies: Where abbreviations and acronyms are used in Specifications or other Contract Documents, they shall mean the recognized name of the entities in the following list. Names are subject to change and are believed to be accurate and up-to-date as of the date of the Contract Documents.

OSHA Occupational Safety & Health Administration

E. Standards and Regulations: Where abbreviations and acronyms are used in Specifications or other Contract Documents, they shall mean the recognized name of the standards and regulations in the following list. Names are subject to change and are believed to be accurate and up-to-date as of the date of the Contract Documents.

ADAAG Americans with Disabilities Act (ADA)  
Architectural Barriers Act (ABA)  
Accessibility Guidelines for Buildings and Facilities  
Available from U.S. Access Board

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION 014200

BLANK PAGE

## SECTION 015000 - TEMPORARY FACILITIES AND CONTROLS

### PART 1 - GENERAL

#### 1.1 SUMMARY

- A. Section includes requirements for temporary utilities, support facilities, and security and protection facilities.
- B. Related Section:
  - 1. Division 01 Section "Summary" for work restrictions and limitations on utility interruptions.

#### 1.2 USE CHARGES

- A. General: Installation and removal of and use charges for temporary facilities shall be included in the Contract Sum unless otherwise indicated. Allow other entities to use temporary services and facilities without cost, including, but not limited to, Architect, testing agencies, and authorities having jurisdiction.
- B. Water and Sewer Service from Existing System: Water from Owner's existing water system is available for use without metering and without payment of use charges. Provide connections and extensions of services as required for construction operations.
- C. Electric Power Service from Existing System: Electric power from Owner's existing system is available for use without metering and without payment of use charges. Provide connections and extensions of services as required for construction operations.

#### 1.3 QUALITY ASSURANCE

- A. Electric Service: Comply with NECA, NEMA, and UL standards and regulations for temporary electric service. Install service to comply with NFPA 70.
- B. Tests and Inspections: Arrange for authorities having jurisdiction to test and inspect each temporary utility before use. Obtain required certifications and permits.
- C. Accessible Temporary Egress: Comply with applicable provisions in the U.S. Architectural & Transportation Barriers Compliance Board's ADA-ABA Accessibility Guidelines and ICC/ANSI A117.1.

#### 1.4 PROJECT CONDITIONS

- A. Temporary Use of Permanent Facilities: Engage installer of each permanent service to assume responsibility for operation, maintenance, and protection of each permanent service during its

use as a construction facility before Owner's acceptance, regardless of previously assigned responsibilities.

## PART 2 - PRODUCTS

### 2.1 TEMPORARY FACILITIES

- A. Field Offices, General: Prefabricated or mobile units with serviceable finishes, temperature controls, and foundations adequate for normal loading.
- B. Common-Use Field Office: Of sufficient size to accommodate needs of Owner, Architect, and construction personnel office activities and to accommodate project meetings specified in other Division 01 Sections. Keep office clean and orderly.
- C. Storage and Fabrication Sheds: Provide sheds sized, furnished, and equipped to accommodate materials and equipment for construction operations.

### 2.2 EQUIPMENT

- A. Fire Extinguishers: Portable, UL rated; with class and extinguishing agent as required by locations and classes of fire exposures.

## PART 3 - EXECUTION

### 3.1 INSTALLATION, GENERAL

- A. Locate facilities where they will serve Project adequately and result in minimum interference with performance of the Work. Relocate and modify facilities as required by progress of the Work.
- B. Provide each facility ready for use when needed to avoid delay. Do not remove until facilities are no longer needed or are replaced by authorized use of completed permanent facilities.

### 3.2 TEMPORARY UTILITY INSTALLATION

- A. Water Service: Connect to Owner's existing water service facilities. Clean and maintain water service facilities in a condition acceptable to Owner. At Substantial Completion, restore these facilities to condition existing before initial use.
- B. Sanitary Facilities: Provide temporary toilets, wash facilities, and drinking water for use of construction personnel. Comply with requirements of authorities having jurisdiction for type, number, location, operation, and maintenance of fixtures and facilities.
- C. Electric Power Service: Connect to Owner's existing electric power service. Maintain equipment in a condition acceptable to Owner.

### 3.3 SUPPORT FACILITIES INSTALLATION

- A. General: Comply with the following:
  - 1. Provide construction for temporary offices, shops, and sheds located within construction area or within 30 feet of building lines that is noncombustible according to ASTM E 136. Comply with NFPA 241.
  - 2. Maintain support facilities until Architect schedules Substantial Completion inspection. Remove before Substantial Completion. Personnel remaining after Substantial Completion will be permitted to use permanent facilities, under conditions acceptable to Owner.
- B. Traffic Controls: Comply with requirements of authorities having jurisdiction.
  - 1. Protect existing site improvements to remain including curbs, pavement, and utilities.
  - 2. Maintain access for fire-fighting equipment and access to fire hydrants.
- C. Parking: Use designated areas of Owner's existing parking areas for construction personnel.
- D. Waste Disposal Facilities: Comply with requirements specified in Division 01 Section "Construction Waste Management and Disposal."
- E. Waste Disposal Facilities: Provide waste-collection containers in sizes adequate to handle waste from construction operations. Comply with requirements of authorities having jurisdiction.
- F. Lifts and Hoists: Provide facilities necessary for hoisting materials and personnel.
  - 1. Truck cranes and similar devices used for hoisting materials are considered "tools and equipment" and not temporary facilities.

### 3.4 SECURITY AND PROTECTION FACILITIES INSTALLATION

- A. Environmental Protection: Provide protection, operate temporary facilities, and conduct construction as required to comply with environmental regulations and that minimize possible air, waterway, and subsoil contamination or pollution or other undesirable effects.
- B. Protection of Pedestrians: Protection required. Pedestrians shall be protected during construction, remodeling and demolition activities as required by Section 3306 and Table 3306.1 of the IBC.
- C. Barricades, Warning Signs, and Lights: Comply with requirements of authorities having jurisdiction for erecting structurally adequate barricades, including warning signs and lighting.
- D. Temporary Egress: Maintain temporary egress from existing occupied facilities as indicated and as required by authorities having jurisdiction.
- E. Temporary Fire Protection: Install and maintain temporary fire-protection facilities of types needed to protect against reasonably predictable and controllable fire losses. Comply with NFPA 241.

1. Prohibit smoking in construction areas.
2. Supervise welding operations, combustion-type temporary heating units, and similar sources of fire ignition according to requirements of authorities having jurisdiction.
3. Develop and supervise an overall fire-prevention and -protection program for personnel at Project site. Review needs with local fire department and establish procedures to be followed. Instruct personnel in methods and procedures. Post warnings and information.

### 3.5 MOISTURE AND MOLD CONTROL

- A. Contractor's Moisture Protection Plan: Avoid trapping water in finished work. Document visible signs of mold that may appear during construction.

### 3.6 OPERATION, TERMINATION, AND REMOVAL

- A. Supervision: Enforce strict discipline in use of temporary facilities. To minimize waste and abuse, limit availability of temporary facilities to essential and intended uses.
- B. Termination and Removal: Remove each temporary facility when need for its service has ended, when it has been replaced by authorized use of a permanent facility, or no later than Substantial Completion. Complete or, if necessary, restore permanent construction that may have been delayed because of interference with temporary facility. Repair damaged Work, clean exposed surfaces, and replace construction that cannot be satisfactorily repaired.
  1. Materials and facilities that constitute temporary facilities are property of Contractor. At Substantial Completion, repair, renovate, and clean permanent facilities used during construction period. Comply with final cleaning requirements specified in Division 01 Section "Closeout Procedures."

END OF SECTION 015000

## SECTION 016000 - PRODUCT REQUIREMENTS

### PART 1 - GENERAL

#### 1.1 SUMMARY

- A. Section includes administrative and procedural requirements for selection of products for use in Project; product delivery, storage, and handling; manufacturers' standard warranties on products; special warranties; and comparable products.
- B. Related Section:
  - 1. Division 01 Section "Substitution Procedures" for requests for substitutions.

#### 1.2 DEFINITIONS

- A. Products: Items obtained for incorporating into the Work, whether purchased for Project or taken from previously purchased stock. The term "product" includes the terms "material," "equipment," "system," and terms of similar intent.
  - 1. Named Products: Items identified by manufacturer's product name, including make or model number or other designation shown or listed in manufacturer's published product literature, that is current as of date of the Contract Documents.
  - 2. New Products: Items that have not previously been incorporated into another project or facility. Products salvaged or recycled from other projects are not considered new products.
  - 3. Comparable Product: Product that is demonstrated and approved through submittal process to have the indicated qualities related to type, function, dimension, in-service performance, physical properties, appearance, and other characteristics that equal or exceed those of specified product.
- B. Basis-of-Design Product Specification: A specification in which a specific manufacturer's product is named and accompanied by the words "basis-of-design product," including make or model number or other designation, to establish the significant qualities related to type, function, dimension, in-service performance, physical properties, appearance, and other characteristics for purposes of evaluating comparable products of additional manufacturers named in the specification.

#### 1.3 ACTION SUBMITTALS

- A. Comparable Product Requests: Submit request for consideration of each comparable product. Identify product or fabrication or installation method to be replaced. Include Specification Section number and title and Drawing numbers and titles.
  - 1. Architect's Action: If necessary, Architect will request additional information or documentation for evaluation within one week of receipt of a comparable product

request. Architect will notify Contractor of approval or rejection of proposed comparable product request within 15 days of receipt of request, or seven days of receipt of additional information or documentation, whichever is later.

- a. Form of Approval: As specified in Division 01 Section "Submittal Procedures."
- b. Use product specified if Architect does not issue a decision on use of a comparable product request within time allocated.

- B. Basis-of-Design Product Specification Submittal: Comply with requirements in Division 01 Section "Submittal Procedures." Show compliance with requirements.

#### 1.4 QUALITY ASSURANCE

- A. Compatibility of Options: If Contractor is given option of selecting between two or more products for use on Project, select product compatible with products previously selected, even if previously selected products were also options.

#### 1.5 PRODUCT DELIVERY, STORAGE, AND HANDLING

- A. Deliver, store, and handle products using means and methods that will prevent damage, deterioration, and loss, including theft and vandalism. Comply with manufacturer's written instructions.

- B. Delivery and Handling:

- 1. Schedule delivery to minimize long-term storage at Project site and to prevent overcrowding of construction spaces.
- 2. Coordinate delivery with installation time to ensure minimum holding time for items that are flammable, hazardous, easily damaged, or sensitive to deterioration, theft, and other losses.
- 3. Deliver products to Project site in an undamaged condition in manufacturer's original sealed container or other packaging system, complete with labels and instructions for handling, storing, unpacking, protecting, and installing.
- 4. Inspect products on delivery to determine compliance with the Contract Documents and to determine that products are undamaged and properly protected.

- C. Storage:

- 1. Store products to allow for inspection and measurement of quantity or counting of units.
- 2. Store materials in a manner that will not endanger Project structure.
- 3. Store products that are subject to damage by the elements, under cover in a weathertight enclosure above ground, with ventilation adequate to prevent condensation.
- 4. Store foam plastic from exposure to sunlight, except to extent necessary for period of installation and concealment.
- 5. Comply with product manufacturer's written instructions for temperature, humidity, ventilation, and weather-protection requirements for storage.
- 6. Protect stored products from damage and liquids from freezing.

## 1.6 PRODUCT WARRANTIES

- A. Warranties specified in other Sections shall be in addition to, and run concurrent with, other warranties required by the Contract Documents. Manufacturer's disclaimers and limitations on product warranties do not relieve Contractor of obligations under requirements of the Contract Documents.
1. Manufacturer's Warranty: Written warranty furnished by individual manufacturer for a particular product and specifically endorsed by manufacturer to Owner.
  2. Special Warranty: Written warranty required by the Contract Documents to provide specific rights for Owner.
- B. Special Warranties: Prepare a written document that contains appropriate terms and identification, ready for execution.
1. Manufacturer's Standard Form: Modified to include Project-specific information and properly executed.
  2. Specified Form: When specified forms are included with the Specifications, prepare a written document using indicated form properly executed.
  3. Refer to Divisions 02 through 49. Sections for specific content requirements and particular requirements for submitting special warranties.
- C. Submittal Time: Comply with requirements in Division 01 Section "Closeout Procedures."

## PART 2 - PRODUCTS

### 2.1 PRODUCT SELECTION PROCEDURES

- A. General Product Requirements: Provide products that comply with the Contract Documents, are undamaged and, unless otherwise indicated, are new at time of installation.
1. Provide products complete with accessories, trim, finish, fasteners, and other items needed for a complete installation and indicated use and effect.
  2. Standard Products: If available, and unless custom products or nonstandard options are specified, provide standard products of types that have been produced and used successfully in similar situations on other projects.
  3. Owner reserves the right to limit selection to products with warranties not in conflict with requirements of the Contract Documents.
  4. Where products are accompanied by the term "as selected," Architect will make selection.
  5. Descriptive, performance, and reference standard requirements in the Specifications establish salient characteristics of products.
- B. Product Selection Procedures:
1. Product: Where Specifications name a single manufacturer and product, provide the named product that complies with requirements. Comparable products or substitutions for Contractor's convenience will not be considered.

2. Manufacturer/Source: Where Specifications name a single manufacturer or source, provide a product by the named manufacturer or source that complies with requirements. Comparable products or substitutions for Contractor's convenience will not be considered.
  3. Products:
    - a. Restricted List: Where Specifications include a list of names of both manufacturers and products, provide one of the products listed that complies with requirements. Comparable products or substitutions for Contractor's convenience will not be considered.
    - b. Nonrestricted List: Where Specifications include a list of names of both available manufacturers and products, provide one of the products listed, or an unnamed product, that complies with requirements. Comply with requirements in "Comparable Products" Article for consideration of an unnamed product.
  4. Manufacturers:
    - a. Restricted List: Where Specifications include a list of manufacturers' names, provide a product by one of the manufacturers listed that complies with requirements. Comparable products or substitutions for Contractor's convenience will not be considered.
    - b. Nonrestricted List: Where Specifications include a list of available manufacturers, provide a product by one of the manufacturers listed, or a product by an unnamed manufacturer, that complies with requirements. Comply with requirements in "Comparable Products" Article for consideration of an unnamed manufacturer's product.
  5. Basis-of-Design Product: Where Specifications name a product, or refer to a product indicated on Drawings, and include a list of manufacturers, provide the specified or indicated product or a comparable product by one of the other named manufacturers. Drawings and Specifications indicate sizes, profiles, dimensions, and other characteristics that are based on the product named. Comply with requirements in "Comparable Products" Article for consideration of an unnamed product by one of the other named manufacturers.
- C. Visual Matching Specification: Where Specifications require "match Architect's sample", provide a product that complies with requirements and matches Architect's sample. Architect's decision will be final on whether a proposed product matches.
1. If no product available within specified category matches and complies with other specified requirements, comply with requirements in Division 01 Section "Substitution Procedures" for proposal of product.
- D. Visual Selection Specification: Where Specifications include the phrase "as selected by Architect from manufacturer's full range" or similar phrase, select a product that complies with requirements. Architect will select color, gloss, pattern, density, or texture from manufacturer's product line that includes both standard and premium items.

## 2.2 COMPARABLE PRODUCTS

- A. Conditions for Consideration: Architect will consider Contractor's request for comparable product when the following conditions are satisfied. If the following conditions are not satisfied, Architect may return requests without action, except to record noncompliance with these requirements:
1. Evidence that the proposed product does not require revisions to the Contract Documents, that it is consistent with the Contract Documents and will produce the indicated results, and that it is compatible with other portions of the Work.
  2. Detailed comparison of significant qualities of proposed product with those named in the Specifications. Significant qualities include attributes such as performance, weight, size, durability, visual effect, and specific features and requirements indicated.
  3. Evidence that proposed product provides specified warranty.
  4. List of similar installations for completed projects with project names and addresses and names and addresses of architects and owners, if requested.
  5. Samples, if requested.

## PART 3 - EXECUTION (Not Used)

END OF SECTION 016000

BLANK PAGE

## SECTION 017300 - EXECUTION

### PART 1 - GENERAL

#### 1.1 SUMMARY

- A. Section includes general administrative and procedural requirements governing execution of the Work including, but not limited to, the following:

1. Construction layout.
2. Field engineering and surveying.
3. Installation of the Work.
4. Cutting and patching.
5. Progress cleaning.
6. Starting and adjusting.
7. Protection of installed construction.
8. Correction of the Work.

- B. Related Sections:

1. Division 01 Section "Closeout Procedures" for submitting final property survey with Project Record Documents, recording of Owner-accepted deviations from indicated lines and levels, and final cleaning.

#### 1.2 INFORMATIONAL SUBMITTALS

- A. Landfill Receipts: Submit copy of receipts issued by a landfill facility, licensed to accept hazardous materials, for hazardous waste disposal.

#### 1.3 QUALITY ASSURANCE

- A. Cutting and Patching: Comply with requirements for and limitations on cutting and patching of construction elements.

1. Structural Elements: When cutting and patching structural elements, notify Architect of locations and details of cutting and await directions from the Architect before proceeding. Shore, brace, and support structural element during cutting and patching. Do not cut and patch structural elements in a manner that could change their load-carrying capacity or increase deflection
2. Operational Elements: Do not cut and patch operating elements and related components in a manner that results in reducing their capacity to perform as intended or that results in increased maintenance or decreased operational life or safety.
3. Other Construction Elements: Do not cut and patch other construction elements or components in a manner that could change their load-carrying capacity, that results in

reducing their capacity to perform as intended, or that results in increased maintenance or decreased operational life or safety.

4. Visual Elements: Do not cut and patch construction in a manner that results in visual evidence of cutting and patching. Do not cut and patch exposed construction in a manner that would, in Architect's opinion, reduce the building's aesthetic qualities. Remove and replace construction that has been cut and patched in a visually unsatisfactory manner.

#### 1.4 WARRANTY

- A. Existing Warranties: Remove, replace, patch, and repair materials and surfaces cut or damaged during installation or cutting and patching operations, by methods and with materials so as not to void existing warranties.

### PART 2 - PRODUCTS

#### 2.1 MATERIALS

- A. General: Comply with requirements specified in other Sections.
- B. In-Place Materials: Use materials for patching identical to in-place materials. For exposed surfaces, use materials that visually match in-place adjacent surfaces to the fullest extent possible.
  1. If identical materials are unavailable or cannot be used, use materials that, when installed, will provide a match acceptable to the Architect for the visual and functional performance of in-place materials.

### PART 3 - EXECUTION

#### 3.1 EXAMINATION

- A. Existing Conditions: The existence and location of underground and other utilities and construction indicated as existing are not guaranteed. Before beginning sitework, investigate and verify the existence and location of underground utilities, mechanical and electrical systems, and other construction affecting the Work.
  1. Before construction, verify the location and invert elevation at points of connection of sanitary sewer, storm sewer, and water-service piping; underground electrical services, and other utilities.
  2. Furnish location data for work related to Project that must be performed by public utilities serving Project site.
- B. Examination and Acceptance of Conditions: Before proceeding with each component of the Work, examine substrates, areas, and conditions, with Installer or Applicator present where

indicated, for compliance with requirements for installation tolerances and other conditions affecting performance. Record observations.

1. Verify compatibility with and suitability of substrates, including compatibility with existing finishes or primers.
2. Examine roughing-in for mechanical and electrical systems to verify actual locations of connections before equipment and fixture installation.
3. Examine walls, floors, and roofs for suitable conditions where products and systems are to be installed.
4. Proceed with installation only after unsatisfactory conditions have been corrected. Proceeding with the Work indicates acceptance of surfaces and conditions.

### 3.2 PREPARATION

- A. Existing Utility Information: Furnish information to Owner that is necessary to adjust, move, or relocate existing utility structures, utility poles, lines, services, or other utility appurtenances located in or affected by construction. Coordinate with authorities having jurisdiction.
- B. Field Measurements: Take field measurements as required to fit the Work properly. Recheck measurements before installing each product. Where portions of the Work are indicated to fit to other construction, verify dimensions of other construction by field measurements before fabrication. Coordinate fabrication schedule with construction progress to avoid delaying the Work.
- C. Space Requirements: Verify space requirements and dimensions of items shown diagrammatically on Drawings.
- D. Review of Contract Documents and Field Conditions: Immediately on discovery of the need for clarification of the Contract Documents caused by differing field conditions outside the control of the Contractor, submit a request for information to Architect according to requirements in Division 01 Section "Project Management and Coordination."

### 3.3 CONSTRUCTION LAYOUT

- A. Verification: Before proceeding to lay out the Work, verify layout information shown on Drawings, in relation to the property survey and existing benchmarks. If discrepancies are discovered, notify Architect promptly.

### 3.4 INSTALLATION

- A. General: Locate the Work and components of the Work accurately, in correct alignment and elevation, as indicated.
  1. Make vertical work plumb and make horizontal work level.
  2. Where space is limited, install components to maximize space available for maintenance and ease of removal for replacement.
  3. Conceal pipes, ducts, and wiring in finished areas, unless otherwise indicated.

- B. Comply with manufacturer's written instructions and recommendations for installing products in applications indicated.
- C. Install products at the time and under conditions that will ensure the best possible results. Maintain conditions required for product performance until Substantial Completion.
- D. Conduct construction operations so no part of the Work is subjected to damaging operations or loading in excess of that expected during normal conditions of occupancy.
- E. Tools and Equipment: Do not use tools or equipment that produce harmful noise levels.
- F. Templates: Obtain and distribute to the parties involved templates for work specified to be factory prepared and field installed. Check Shop Drawings of other work to confirm that adequate provisions are made for locating and installing products to comply with indicated requirements.
- G. Attachment: Provide blocking and attachment plates and anchors and fasteners of adequate size and number to securely anchor each component in place, accurately located and aligned with other portions of the Work. Where size and type of attachments are not indicated, verify size and type required for load conditions.
  - 1. Mounting Heights: Where mounting heights are not indicated, mount components at heights directed by Architect.
  - 2. Allow for building movement, including thermal expansion and contraction.
  - 3. Coordinate installation of anchorages. Furnish setting drawings, templates, and directions for installing anchorages, including sleeves, concrete inserts, anchor bolts, and items with integral anchors, that are to be embedded in concrete or masonry. Deliver such items to Project site in time for installation.
- H. Joints: Make joints of uniform width. Where joint locations in exposed work are not indicated, arrange joints for the best visual effect. Fit exposed connections together to form hairline joints.
- I. Hazardous Materials: Use products, cleaners, and installation materials that are not considered hazardous.

### 3.5 CUTTING AND PATCHING

- A. Cutting and Patching, General: Employ skilled workers to perform cutting and patching. Proceed with cutting and patching at the earliest feasible time, and complete without delay.
  - 1. Cut in-place construction to provide for installation of other components or performance of other construction, and subsequently patch as required to restore surfaces to their original condition.
- B. Temporary Support: Provide temporary support of work to be cut.
- C. Protection: Protect in-place construction during cutting and patching to prevent damage. Provide protection from adverse weather conditions for portions of Project that might be exposed during cutting and patching operations.

- D. Adjacent Occupied Areas: Avoid interference with use of adjoining areas or interruption of free passage to adjoining areas.
- E. Existing Utility Services and Mechanical/Electrical Systems: Where existing services/systems are required to be removed, relocated, or abandoned, bypass such services/systems before cutting to prevent interruption to occupied areas.
- F. Cutting: Cut in-place construction by sawing, drilling, breaking, chipping, grinding, and similar operations, including excavation, using methods least likely to damage elements retained or adjoining construction. If possible, review proposed procedures with original Installer; comply with original Installer's written recommendations.
  - 1. In general, use hand or small power tools designed for sawing and grinding, not hammering and chopping. Cut holes and slots neatly to minimum size required, and with minimum disturbance of adjacent surfaces. Temporarily cover openings when not in use.
  - 2. Finished Surfaces: Cut or drill from the exposed or finished side into concealed surfaces.
  - 3. Mechanical and Electrical Services: Cut off pipe or conduit in walls or partitions to be removed. Cap, valve, or plug and seal remaining portion of pipe or conduit to prevent entrance of moisture or other foreign matter after cutting.
  - 4. Proceed with patching after construction operations requiring cutting are complete.
- G. Patching: Patch construction by filling, repairing, refinishing, closing up, and similar operations following performance of other work. Patch with durable seams that are as invisible as practicable. Provide materials and comply with installation requirements specified in other Sections, where applicable.
  - 1. Inspection: Where feasible, test and inspect patched areas after completion to demonstrate physical integrity of installation.
  - 2. Exposed Finishes: Restore exposed finishes of patched areas and extend finish restoration into retained adjoining construction in a manner that will minimize evidence of patching and refinishing.
  - 3. Exterior Building Enclosure: Patch components in a manner that restores enclosure to a weathertight condition.
- H. Cleaning: Clean areas and spaces where cutting and patching are performed. Remove paint, mortar, oils, putty, and similar materials from adjacent finished surfaces.

### 3.6 PROGRESS CLEANING

- A. General: Clean Project site and work areas daily, including common areas. Enforce requirements strictly. Dispose of materials lawfully.
  - 1. Comply with requirements in NFPA 241 for removal of combustible waste materials and debris.
  - 2. Do not hold waste materials more than seven days during normal weather or three days if the temperature is expected to rise above 80 deg F.
  - 3. Containerize hazardous and unsanitary waste materials separately from other waste. Mark containers appropriately and dispose of legally, according to regulations.
- B. Site: Maintain Project site free of waste materials and debris.

- C. Work Areas: Clean areas where work is in progress to the level of cleanliness necessary for proper execution of the Work.
  - 1. Remove liquid spills promptly.
  - 2. Where dust would impair proper execution of the Work, broom-clean or vacuum the entire work area, as appropriate.
- D. Installed Work: Keep installed work clean. Clean installed surfaces according to written instructions of manufacturer or fabricator of product installed, using only cleaning materials specifically recommended. If specific cleaning materials are not recommended, use cleaning materials that are not hazardous to health or property and that will not damage exposed surfaces.
- E. Concealed Spaces: Remove debris from concealed spaces before enclosing the space.
- F. Exposed Surfaces in Finished Areas: Clean exposed surfaces and protect as necessary to ensure freedom from damage and deterioration at time of Substantial Completion.
- G. Waste Disposal: Do not bury or burn waste materials on-site. Do not wash waste materials down sewers or into waterways.
- H. During handling and installation, clean and protect construction in progress and adjoining materials already in place. Apply protective covering where required to ensure protection from damage or deterioration at Substantial Completion.
- I. Clean and provide maintenance on completed construction as frequently as necessary through the remainder of the construction period. Adjust and lubricate operable components to ensure operability without damaging effects.
- J. Limiting Exposures: Supervise construction operations to assure that no part of the construction, completed or in progress, is subject to harmful, dangerous, damaging, or otherwise deleterious exposure during the construction period.

### 3.7 PROTECTION OF INSTALLED CONSTRUCTION

- A. Provide final protection and maintain conditions that ensure installed Work is without damage or deterioration at time of Substantial Completion.
- B. Comply with manufacturer's written instructions for temperature and relative humidity.

### 3.8 CORRECTION OF THE WORK

- A. Repair or remove and replace defective construction. Restore damaged substrates and finishes.
  - 1. Repairing includes replacing defective parts, refinishing damaged surfaces, touching up with matching materials, and properly adjusting operating equipment.
- B. Restore permanent facilities used during construction to their specified condition.

- C. Remove and replace damaged surfaces that are exposed to view if surfaces cannot be repaired without visible evidence of repair.
- D. Repair components that do not operate properly. Remove and replace operating components that cannot be repaired.

END OF SECTION 017300

BLANK PAGE

## SECTION 017419 - CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL

### PART 1 - GENERAL

#### 1.1 SUMMARY

- A. Section includes administrative and procedural requirements for the following:
  - 1. Disposing of nonhazardous demolition and construction waste.
  - 2. Disposing of hazardous demolition and construction waste.
- B. Related Sections:
  - 1. Division 07 Section "Preparation for Reroofing" for disposition of waste resulting from demolition of roofing, and for disposition of hazardous waste.

#### 1.2 DEFINITIONS

- A. Construction Waste: Building and site improvement materials and other solid waste resulting from construction, remodeling, renovation, or repair operations. Construction waste includes packaging.
- B. Demolition Waste: Building and site improvement materials resulting from demolition or selective demolition operations.
- C. Disposal: Removal off-site of demolition and construction waste and subsequent sale, recycling, reuse, or deposit in landfill or incinerator acceptable to authorities having jurisdiction.

#### 1.3 ACTION SUBMITTALS

- A. Waste Management Plan: Submit plan within 7 days of date established for the Notice of Award.

#### 1.4 INFORMATIONAL SUBMITTALS

- A. Waste Reduction Progress Reports: Concurrent with each Application for Payment, submit report. Include the following information:
  - 1. Material category.
  - 2. Generation point of waste.
  - 3. Total quantity of waste in tons.
- B. Landfill and Incinerator Disposal Records: Indicate receipt and acceptance of waste by landfills and incinerator facilities licensed to accept them. Include manifests, weight tickets, receipts, and invoices.

- C. Qualification Data: For waste management coordinator.

#### 1.5 QUALITY ASSURANCE

- A. Waste Management Conference: Conduct conference at Project site to comply with requirements in Division 01 Section "Project Management and Coordination."

#### 1.6 WASTE MANAGEMENT PLAN

- A. General: Develop a waste management plan according to ASTM E 1609 and requirements of this Section. Plan shall consist of waste identification, waste reduction work plan, and cost/revenue analysis. Distinguish between demolition and construction waste. Indicate quantities by weight or volume, but use same units of measure throughout waste management plan.
- B. Waste Identification: Indicate anticipated types and quantities of demolition and construction waste generated by the Work. Include estimated quantities and assumptions for estimates.

#### PART 2 - PRODUCTS (Not Used)

#### PART 3 - EXECUTION

##### 3.1 PLAN IMPLEMENTATION

- A. General: Implement approved waste management plan. Provide handling, containers, storage, signage, transportation, and other items as required to implement waste management plan during the entire duration of the Contract.
- B. Training: Train workers, subcontractors, and suppliers on proper waste management procedures, as appropriate for the Work occurring at Project site.
  - 1. Distribute waste management plan to everyone concerned within three days of submittal return.
  - 2. Distribute waste management plan to entities when they first begin work on-site. Review plan procedures and locations established for salvage, recycling, and disposal.
- C. Site Access and Temporary Controls: Conduct waste management operations to ensure minimum interference with roads, streets, walks, walkways, and other adjacent occupied and used facilities.
  - 1. Designate and label specific areas on Project site necessary for separating materials that are to be salvaged, recycled, reused, donated, and sold.
  - 2. Comply with Division 01 Section "Temporary Facilities and Controls" for controlling dust and dirt, environmental protection, and noise control.

3.2 DISPOSAL OF WASTE

- A. General: Remove waste materials from Project site and legally dispose of them in a landfill or incinerator acceptable to authorities having jurisdiction.
  - 1. Except as otherwise specified, do not allow waste materials that are to be disposed of accumulate on-site.
  - 2. Remove and transport debris in a manner that will prevent spillage on adjacent surfaces and areas.
- B. Burning: Do not burn waste materials.
- C. Disposal: Transport waste materials off Owner's property and legally dispose of them.

END OF SECTION 017419

BLANK PAGE

## SECTION 017700 - CLOSEOUT PROCEDURES

### PART 1 - GENERAL

#### 1.1 SUMMARY

- A. Section includes administrative and procedural requirements for contract closeout, including, but not limited to, the following:
1. Substantial Completion procedures.
  2. Final completion procedures.
  3. Warranties.
  4. Final cleaning.
- B. Related Sections:
1. Division 01 Section "Project Record Documents" for submitting Record Drawings, Record Specifications, and Record Product Data.
  2. Division 01 Section "Demonstration and Training" for requirements for instructing Owner's personnel.
  3. Divisions 02 through 49 Sections for specific closeout and special cleaning requirements for the Work in those Sections.

#### 1.2 SUBSTANTIAL COMPLETION

- A. Preliminary Procedures: Before requesting inspection for determining date of Substantial Completion, complete the following. List items below that are incomplete with request.
1. Prepare a list of items to be completed and corrected (punch list), the value of items on the list, and reasons why the Work is not complete.
  2. Advise Owner of pending insurance changeover requirements.
  3. Submit specific warranties, workmanship bonds, maintenance service agreements, final certifications, and similar documents.
  4. Obtain and submit releases permitting Owner unrestricted use of the Work and access to services and utilities. Include occupancy permits, operating certificates, and similar releases.
  5. Prepare and submit Project Record Documents, operation and maintenance manuals, final completion construction photographic documentation, damage or settlement surveys, property surveys, and similar final record information.
  6. Deliver tools, spare parts, extra materials, and similar items to location designated by Owner. Label with manufacturer's name and model number where applicable.
  7. Make final changeover of permanent locks and deliver keys to Owner. Advise Owner's personnel of changeover in security provisions.
  8. Complete startup testing of systems.
  9. Submit test/adjust/balance records.
  10. Terminate and remove temporary facilities from Project site, along with mockups, construction tools, and similar elements.
  11. Advise Owner of changeover in heat and other utilities.

12. Submit changeover information related to Owner's occupancy, use, operation, and maintenance.
  13. Complete final cleaning requirements, including touchup painting.
  14. Touch up and otherwise repair and restore marred exposed finishes to eliminate visual defects.
- B. Inspection: Submit a written request for inspection for Substantial Completion. On receipt of request, Architect will either proceed with inspection or notify Contractor of unfulfilled requirements. Architect will prepare the Certificate of Substantial Completion after inspection or will notify Contractor of items, either on Contractor's list or additional items identified by Architect, that must be completed or corrected before certificate will be issued.
1. Reinspection: Request reinspection when the Work identified in previous inspections as incomplete is completed or corrected.
  2. Results of completed inspection will form the basis of requirements for final completion.

### 1.3 FINAL COMPLETION

- A. Preliminary Procedures: Before requesting final inspection for determining final completion, complete the following:
1. Submit a final Application for Payment according to Division 01 Section "Payment Procedures."
  2. Submit certified copy of Architect's Substantial Completion inspection list of items to be completed or corrected (punch list), endorsed and dated by Architect. The certified copy of the list shall state that each item has been completed or otherwise resolved for acceptance.
  3. Submit evidence of final, continuing insurance coverage complying with insurance requirements.
  4. Submit pest-control final inspection report and warranty.
  5. Instruct Owner's personnel in operation, adjustment, and maintenance of products, equipment, and systems.
- B. Inspection: Submit a written request for final inspection for acceptance. On receipt of request, Architect will either proceed with inspection or notify Contractor of unfulfilled requirements. Architect will prepare a final Certificate for Payment after inspection or will notify Contractor of construction that must be completed or corrected before certificate will be issued.
1. Reinspection: Request reinspection when the Work identified in previous inspections as incomplete is completed or corrected.

### 1.4 LIST OF INCOMPLETE ITEMS (PUNCH LIST)

- A. Organization of List: Include name and identification of each space and area affected by construction operations for incomplete items and items needing correction including, if necessary, areas disturbed by Contractor that are outside the limits of construction.
1. Organize list of spaces in sequential order.

2. Organize items applying to each space by major element, including categories for ceiling, individual walls, floors, equipment, and building systems.
3. Submit list of incomplete items in the following format:
  - a. PDF electronic file.
  - b. Three paper copies, unless otherwise indicated. Architect will return two copies.

#### 1.5 WARRANTIES

- A. Submittal Time: Submit written warranties on request of Architect for designated portions of the Work where commencement of warranties other than date of Substantial Completion is indicated.
- B. Organize warranty documents into an orderly sequence based on the table of contents of the Project Manual.
  1. Bind warranties and bonds in heavy-duty, 3-ring, vinyl-covered, loose-leaf binders, thickness as necessary to accommodate contents, and sized to receive 8-1/2-by-11-inch paper.
  2. Provide heavy paper dividers with plastic-covered tabs for each separate warranty. Mark tab to identify the product or installation. Provide a typed description of the product or installation, including the name of the product and the name, address, and telephone number of Installer.
  3. Identify each binder on the front and spine with the typed or printed title "WARRANTIES," Project name, and name of Contractor.
  4. Scan warranties and bonds and assemble complete warranty and bond submittal package into a single indexed electronic PDF file with links enabling navigation to each item. Provide table of contents at beginning of document.
- C. Provide additional copies of each warranty to include in operation and maintenance manuals.

### PART 2 - PRODUCTS

#### 2.1 MATERIALS

- A. Cleaning Agents: Use cleaning materials and agents recommended by manufacturer or fabricator of the surface to be cleaned. Do not use cleaning agents that are potentially hazardous to health or property or that might damage finished surfaces.

### PART 3 - EXECUTION

#### 3.1 FINAL CLEANING

- A. General: Perform final cleaning. Conduct cleaning and waste-removal operations to comply with local laws and ordinances and Federal and local environmental and antipollution regulations.

- B. Cleaning: Employ experienced workers or professional cleaners for final cleaning. Clean each surface or unit to condition expected in an average commercial building cleaning and maintenance program. Comply with manufacturer's written instructions.
1. Complete the following cleaning operations before requesting inspection for certification of Substantial Completion for entire Project or for a portion of Project:
    - a. Clean Project site, yard, and grounds, in areas disturbed by construction activities, including landscape development areas, of rubbish, waste material, litter, and other foreign substances.
    - b. Sweep paved areas broom clean. Remove petrochemical spills, stains, and other foreign deposits.
    - c. Rake grounds that are neither planted nor paved to a smooth, even-textured surface.
    - d. Remove tools, construction equipment, machinery, and surplus material from Project site.
    - e. Clean exposed exterior and interior hard-surfaced finishes to a dirt-free condition, free of stains, films, and similar foreign substances. Avoid disturbing natural weathering of exterior surfaces. Restore reflective surfaces to their original condition.
    - f. Remove debris and surface dust from limited access spaces, including roofs, plenums, shafts, trenches, equipment vaults, manholes, attics, and similar spaces.
    - g. Touch up and otherwise repair and restore marred, exposed finishes and surfaces. Replace finishes and surfaces that cannot be satisfactorily repaired or restored or that already show evidence of repair or restoration.
    - h. Leave Project clean and ready for occupancy.

END OF SECTION 017700

## SECTION 017839 - PROJECT RECORD DOCUMENTS

### PART 1 - GENERAL

#### 1.1 SUMMARY

- A. Section includes administrative and procedural requirements for project record documents, including the following:
  - 1. Record Drawings.
  - 2. Record Specifications.
  - 3. Record Product Data.
- B. Related Sections:
  - 1. Divisions 02 through 49 Sections for specific requirements for project record documents of the Work in those Sections.

#### 1.2 CLOSEOUT SUBMITTALS

- A. Record Drawings: Comply with the following:
  - 1. Number of Copies: Submit one set(s) of marked-up record prints.
- B. Record Specifications: Submit one paper copy of Project's Specifications, including addenda and contract modifications.
- C. Record Product Data: Submit one paper copy of each submittal.

### PART 2 - PRODUCTS

#### 2.1 RECORD DRAWINGS

- A. Record Prints: Maintain one set of marked-up paper copies of the Contract Drawings and Shop Drawings.
  - 1. Preparation: Mark record prints to show the actual installation where installation varies from that shown originally. Require individual or entity who obtained record data, whether individual or entity is Installer, subcontractor, or similar entity, to provide information for preparation of corresponding marked-up record prints.
    - a. Give particular attention to information on concealed elements that would be difficult to identify or measure and record later.
    - b. Record data as soon as possible after obtaining it.
    - c. Record and check the markup before enclosing concealed installations.

2. Mark the Contract Drawings and Shop Drawings completely and accurately. Utilize personnel proficient at recording graphic information in production of marked-up record prints.
  3. Mark record sets with erasable, red-colored pencil. Use other colors to distinguish between changes for different categories of the Work at same location.
  4. Note Construction Change Directive numbers, alternate numbers, Change Order numbers, and similar identification, where applicable.
- B. Format: Identify and date each record Drawing; include the designation "PROJECT RECORD DRAWING" in a prominent location.
1. Record Prints: Organize record prints and newly prepared record Drawings into manageable sets. Bind each set with durable paper cover sheets. Include identification on cover sheets.
  2. Format: Annotated PDF electronic file with comment function enabled.
  3. Identification: As follows:
    - a. Project name.
    - b. Date.
    - c. Designation "PROJECT RECORD DRAWINGS."
    - d. Name of Architect.
    - e. Name of Contractor.

## 2.2 RECORD SPECIFICATIONS

- A. Preparation: Mark Specifications to indicate the actual product installation where installation varies from that indicated in Specifications, addenda, and contract modifications.
1. Give particular attention to information on concealed products and installations that cannot be readily identified and recorded later.
  2. Mark copy with the proprietary name and model number of products, materials, and equipment furnished, including substitutions and product options selected.
  3. Record the name of manufacturer, supplier, installer, and other information necessary to provide a record of selections made.
  4. Note related Change Orders, record Product Data, and record Drawings where applicable.
- B. Format: Submit record Specifications as paper copy.

## 2.3 RECORD PRODUCT DATA

- A. Preparation: Mark Product Data to indicate the actual product installation where installation varies substantially from that indicated in Product Data submittal.
1. Give particular attention to information on concealed products and installations that cannot be readily identified and recorded later.
  2. Include significant changes in the product delivered to Project site and changes in manufacturer's written instructions for installation.
  3. Note related Change Orders, record Specifications, and record Drawings where applicable.

- B. Format: Submit record Product Data as paper copy.

#### 2.4 MISCELLANEOUS RECORD SUBMITTALS

- A. Assemble miscellaneous records required by other Specification Sections for miscellaneous record keeping and submittal in connection with actual performance of the Work. Bind or file miscellaneous records and identify each, ready for continued use and reference.
- B. Format: Submit miscellaneous record submittals as paper copy.

### PART 3 - EXECUTION

#### 3.1 RECORDING AND MAINTENANCE

- A. Recording: Maintain one copy of each submittal during the construction period for project record document purposes. Post changes and modifications to project record documents as they occur; do not wait until the end of Project.
- B. Maintenance of Record Documents and Samples: Store record documents and Samples in the field office apart from the Contract Documents used for construction. Do not use project record documents for construction purposes. Maintain record documents in good order and in a clean, dry, legible condition, protected from deterioration and loss. Provide access to project record documents for Architect's reference during normal working hours.

END OF SECTION 017839

BLANK PAGE

# **SOUTHERN UTAH UNIVERSITY TECHNOLOGY BUILDING RE-ROOF**



State of Utah—Department of Administrative Services

**DIVISION OF FACILITIES CONSTRUCTION  
AND MANAGEMENT**

4110 State Office Building/Salt Lake City, Utah 84114/656-3018

**DFCM Project #09257730  
Southern Utah University; Cedar City, Utah**

**DIVISION 2  
EXISTING CONDITIONS**



NOT APPLICABLE

# **SOUTHERN UTAH UNIVERSITY TECHNOLOGY BUILDING RE-ROOF**




State of Utah—Department of Administrative Services

**DIVISION OF FACILITIES CONSTRUCTION  
AND MANAGEMENT**

4110 State Office Building/Salt Lake City, Utah 84114/638-3018

**DFCM Project #09257730  
Southern Utah University; Cedar City, Utah**

**DIVISION 3  
CONCRETE**

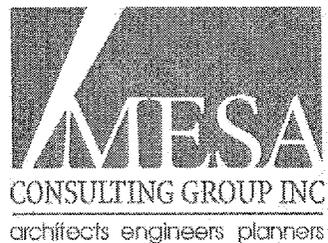

NOT APPLICABLE

# **SOUTHERN UTAH UNIVERSITY TECHNOLOGY BUILDING RE-ROOF**




State of Utah—Department of Administrative Services.

**DIVISION OF FACILITIES CONSTRUCTION  
AND MANAGEMENT**

4110 State Office Building/Salt Lake City, Utah 84114/588-3018

**DFCM Project #09257730  
Southern Utah University; Cedar City, Utah**

**DIVISION 4  
MASONRY**

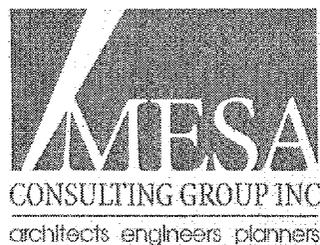

NOT APPLICABLE

# **SOUTHERN UTAH UNIVERSITY TECHNOLOGY BUILDING RE-ROOF**



State of Utah—Department of Administrative Services

**DIVISION OF FACILITIES CONSTRUCTION  
AND MANAGEMENT**

4110 State Office Building/Salt Lake City, Utah 84114/538-3018

**DFCM Project #09257730  
Southern Utah University; Cedar City, Utah**

**DIVISION 5  
METALS**



BLANK PAGE

## SECTION 055213 - PIPE AND TUBE RAILINGS

### PART 1 - GENERAL

#### 1.1 SUMMARY

A. Section Includes:

1. Steel pipe railings.

#### 1.2 PERFORMANCE REQUIREMENTS

A. Structural Performance: Railings shall withstand the effects of gravity loads and the following loads and stresses within limits and under conditions indicated:

1. Handrails and Top Rails of Guards:

- a. Uniform load of 50 lbf/ ft. applied in any direction.
- b. Concentrated load of 200 lbf applied in any direction.
- c. Uniform and concentrated loads need not be assumed to act concurrently.

2. Infill of Guards:

- a. Concentrated load of 50 lbf applied horizontally on an area of 1 sq. ft..
- b. Infill load and other loads need not be assumed to act concurrently.

B. Control of Corrosion: Prevent galvanic action and other forms of corrosion by insulating metals and other materials from direct contact with incompatible materials.

#### 1.3 SUBMITTALS

A. Shop Drawings: Include plans, elevations, sections, details, and attachments to other work.

B. Samples: For each type of exposed finish required.

### PART 2 - PRODUCTS

#### 2.1 METALS, GENERAL

A. Brackets, Flanges, and Anchors: Cast or formed metal of same type of material and finish as supported rails unless otherwise indicated.

## 2.2 STEEL AND IRON

- A. Pipe: ASTM A 53/A 53M, Type F or Type S, Grade A, Standard Weight (Schedule 40), unless another grade and weight are required by structural loads.
- B. Plates, Shapes, and Bars: ASTM A 36/A 36M.

## 2.3 MISCELLANEOUS MATERIALS

- A. Fasteners: Provide the following:
  - 1. Hot-Dip Galvanized Railings: Type 304 stainless-steel or hot-dip zinc-coated steel fasteners complying with ASTM A 153/A 153M or ASTM F 2329 for zinc coating.
- B. Post-Installed Anchors: Torque-controlled expansion anchors capable of sustaining, without failure, a load equal to six times the load imposed when installed in unit masonry and four times the load imposed when installed in concrete, as determined by testing according to ASTM E 488, conducted by a qualified independent testing agency.
- C. Etching Cleaner for Galvanized Metal: Complying with MPI#25.
- D. Galvanizing Repair Paint: High-zinc-dust-content paint complying with SSPC-Paint 20 and compatible with paints specified to be used over it.

## 2.4 FABRICATION

- A. Cut, drill, and punch metals cleanly and accurately. Remove burrs and ease edges to a radius of approximately 1/32 inch unless otherwise indicated. Remove sharp or rough areas on exposed surfaces.
- B. Form work true to line and level with accurate angles and surfaces.
- C. Welded Connections: Cope components at connections to provide close fit, or use fittings designed for this purpose. Weld all around at connections, including at fittings.
  - 1. Use materials and methods that minimize distortion and develop strength and corrosion resistance of base metals.
  - 2. Obtain fusion without undercut or overlap.
  - 3. Remove flux immediately.
  - 4. At exposed connections, finish exposed surfaces smooth and blended so no roughness shows after finishing and welded surface matches contours of adjoining surfaces.
- D. Form changes in direction by bending.
- E. Bend members in jigs to produce uniform curvature without buckling or otherwise deforming exposed surfaces.
- F. Close exposed ends of railing members with prefabricated end fittings.
- G. Provide wall returns at ends of wall-mounted handrails unless otherwise indicated.

- H. Brackets, Flanges, Fittings, and Anchors: Provide wall brackets, flanges, miscellaneous fittings, and anchors to interconnect railing members to other work unless otherwise indicated.
  - 1. At brackets and fittings fastened to plaster or gypsum board partitions, provide crush-resistant fillers to transfer loads through wall finishes.

## 2.5 STEEL AND IRON FINISHES

### A. Galvanized Railings:

- 1. Hot-dip galvanize exterior steel and iron railings, including hardware, after fabrication.
- 2. Comply with ASTM A 123/A 123M for hot-dip galvanized railings.
- 3. Comply with ASTM A 153/A 153M for hot-dip galvanized hardware.

## PART 3 - EXECUTION

### 3.1 INSTALLATION

- A. Set railings accurately in location, alignment, and elevation; measured from established lines and levels and free of rack.
  - 1. Do not weld, cut, or abrade surfaces of railing components that have been coated or finished after fabrication and that are intended for field connection by mechanical or other means without further cutting or fitting.
  - 2. Set posts plumb within a tolerance of 1/16 inch in 3 feet.
  - 3. Align rails so variations from level for horizontal members and variations from parallel with rake of steps and ramps for sloping members do not exceed 1/4 inch in 12 feet.
- B. Anchor posts in CMU by inserting into preset metal pipe sleeves formed or core-drilled holes.
- C. Secure wall brackets to building construction as follows:
  - 1. For concrete and solid masonry anchorage, use drilled-in expansion shields and hanger or lag bolts.
  - 2. For hollow masonry anchorage, use toggle bolts.

### 3.2 ADJUSTING AND CLEANING

- A. Galvanized Surfaces: Clean field welds, bolted connections, and abraded areas and repair galvanizing to comply with ASTM A 780.

END OF SECTION 055213

BLANK PAGE

# **SOUTHERN UTAH UNIVERSITY TECHNOLOGY BUILDING RE-ROOF**




State of Utah—Department of Administrative Services

**DIVISION OF FACILITIES CONSTRUCTION  
AND MANAGEMENT**

4110 State Office Building/Salt Lake City, Utah 84114/538-3018

**DFCM Project #09257730  
Southern Utah University; Cedar City, Utah**

**DIVISION 6  
WOOD, PLASTICS, AND COMPOSITES**

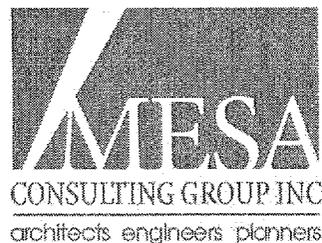

BLANK PAGE

## SECTION 061053 - MISCELLANEOUS ROUGH CARPENTRY

### PART 1 - GENERAL

#### 1.1 SUMMARY

- A. Section Includes:
1. Rooftop equipment bases and support curbs.
  2. Wood blocking, cants, and nailers.

#### 1.2 ACTION SUBMITTALS

- A. Product Data: For each type of process and factory-fabricated product. Indicate component materials and dimensions and include construction and application details.

#### 1.3 INFORMATIONAL SUBMITTALS

- A. Evaluation Reports: For the following, from ICC-ES:
1. Preservative-treated wood.
  2. Power-driven fasteners.

### PART 2 - PRODUCTS

#### 2.1 WOOD PRODUCTS, GENERAL

- A. Lumber: DOC PS 20 and applicable rules of grading agencies indicated. If no grading agency is indicated, provide lumber that complies with the applicable rules of any rules-writing agency certified by the ALSC Board of Review. Provide lumber graded by an agency certified by the ALSC Board of Review to inspect and grade lumber under the rules indicated.
1. Factory mark each piece of lumber with grade stamp of grading agency.
  2. Provide dressed lumber, S4S, unless otherwise indicated.
- B. Maximum Moisture Content of Lumber: 15 percent unless otherwise indicated.

#### 2.2 WOOD-PRESERVATIVE-TREATED MATERIALS

- A. Preservative Treatment by Pressure Process: AWPA U1; Use Category UC2, Use Category UC3b for exterior construction not in contact with the ground.
1. Preservative Chemicals: Acceptable to authorities having jurisdiction and containing no arsenic or chromium. Do not use inorganic boron (SBX) for sill plates.

- B. Kiln-dry lumber after treatment to a maximum moisture content of 19 percent. Do not use material that is warped or does not comply with requirements for untreated material.
- C. Mark lumber with treatment quality mark of an inspection agency approved by the ALSC Board of Review.
- D. Application: Treat all miscellaneous carpentry unless otherwise indicated.

### 2.3 MISCELLANEOUS LUMBER

- A. General: Provide miscellaneous lumber indicated and lumber for support or attachment of other construction, including the following:
  - 1. Blocking.
  - 2. Nailers.
  - 3. Rooftop equipment bases and support curbs.
  - 4. Cants.
  - 5. Furring.
  - 6. Grounds.
- B. For items of dimension lumber size, provide Construction or No. 2 grade lumber of any species.
- C. For concealed boards, provide lumber with 15 percent maximum moisture content and the following species and grades:
  - 1. Western woods, Construction or No. 2 Common grade; WCLIB or WWPA.

### 2.4 FASTENERS

- A. General: Provide fasteners of size and type indicated that comply with requirements specified in this article for material and manufacture.
  - 1. Where carpentry is exposed to weather, in ground contact, pressure-preservative treated, or in area of high relative humidity, provide fasteners with hot-dip zinc coating complying with ASTM A 153/A 153M of Type 304 stainless steel.
- B. Power-Driven Fasteners: NES NER-272.

### 2.5 MISCELLANEOUS MATERIALS

- A. Flexible Flashing: Self-adhesive butyl rubber or rubberized-asphalt compound, bonded to a high-density polyethylene film, aluminum foil, or spunbonded polyolefin to produce an overall thickness of not less than 0.025 inch.

PART 3 - EXECUTION

3.1 INSTALLATION, GENERAL

- A. Set carpentry to required levels and lines, with members plumb, true to line, cut, and fitted. Fit carpentry to other construction; scribe and cope as needed for accurate fit.
- B. Where wood-preserved-treated lumber is installed adjacent to metal decking, install continuous flexible flashing separator between wood and metal decking.
- C. Framing Standard: Comply with AF&PA's WCD 1, "Details for Conventional Wood Frame Construction," unless otherwise indicated.
- D. Do not splice structural members between supports unless otherwise indicated.
- E. Comply with AWPAM4 for applying field treatment to cut surfaces of preservative-treated lumber.
- F. Securely attach carpentry work to substrate by anchoring and fastening as indicated, complying with the following:
  - 1. NES NER-272 for power-driven fasteners.
  - 2. Table 2304.9.1, "Fastening Schedule," in ICC's International Building Code.

3.2 PROTECTION

- A. Protect wood that has been treated with inorganic boron (SBX) from weather. If, despite protection, inorganic boron-treated wood becomes wet, apply EPA-registered borate treatment. Apply borate solution by spraying to comply with EPA-registered label.

END OF SECTION 061053

BLANK PAGE

# **SOUTHERN UTAH UNIVERSITY TECHNOLOGY BUILDING RE-ROOF**




State of Utah—Department of Administrative Services

**DIVISION OF FACILITIES CONSTRUCTION  
AND MANAGEMENT**

4150 State Office Building/Salt Lake City, Utah 84114/588-3016

**DFCM Project #09257730  
Southern Utah University; Cedar City, Utah**

**DIVISION 7  
THERMAL & MOISTURE PROTECTION**

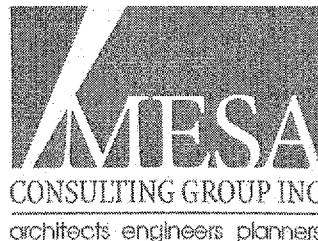

BLANK PAGE

SECTION 070150 - PREPARATION FOR RE-ROOFING

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
1. Roof tear-off.
  2. Roof re-cover preparation.
  3. Removal of base flashings.

1.2 SUBMITTALS

- A. Product Data: For each type of product indicated.
- B. Temporary Roofing: Include Product Data and description of temporary roofing system. If temporary roof will remain in place, submit surface preparation requirements needed to receive permanent roof, and submit a letter from roofing membrane manufacturer stating acceptance of the temporary membrane and that its inclusion will not adversely affect the roofing system's resistance to fire and wind or its FM Global rating.
- C. Photographs or Videotape: Show existing conditions of adjoining construction and site improvements, including exterior and interior finish surfaces, that might be misconstrued as having been damaged by reroofing operations. Submit before Work begins.

1.3 QUALITY ASSURANCE

- A. Installer Qualifications: Installer of new membrane roofing system.
- B. Reroofing Conference: Conduct conference at Project site.

1.4 PROJECT CONDITIONS

- A. Owner will occupy building below reroofing area. Conduct reroofing so Owner's operations will not be disrupted. Provide Owner with not less than 72 hours' notice of activities that may affect Owner's operations.
1. Coordinate work activities daily with Owner so Owner can place protective dust or water leakage covers over sensitive equipment or furnishings, shut down HVAC and fire-alarm or -detection equipment if needed, and evacuate occupants from below the work area.
  2. Before working over structurally impaired areas of deck, notify Owner to evacuate occupants from below the affected area. Verify that occupants below the work area have been evacuated before proceeding with work over the impaired deck area.

- B. Protect building to be reroofed, adjacent buildings, walkways, site improvements, exterior plantings, and landscaping from damage or soiling from reroofing operations.
- C. Limit construction loads on roof to 300 lbs. rooftop equipment wheel loads and 20 lbs/sq.ft. for uniformly distributed loads.
- D. Weather Limitations: Proceed with reroofing preparation only when existing and forecasted weather conditions permit Work to proceed without water entering existing roofing system or building.

## PART 2 - PRODUCTS

### 2.1 AUXILIARY REROOFING MATERIALS

- A. General: Auxiliary reroofing preparation materials recommended by roofing system manufacturer for intended use and compatible with components of existing and new membrane roofing system.
- B. Base Sheet Fasteners: Capped head, factory-coated steel fasteners, listed in FM Approval's "Approval Guide."

## PART 3 - EXECUTION

### 3.1 PREPARATION

- A. Coordinate with Owner to shut down air-intake equipment in the vicinity of the Work. Cover air-intake louvers before proceeding with reroofing work that could affect indoor air quality or activate smoke detectors in the ductwork.
- B. Maintain roof drains in functioning condition to ensure roof drainage at end of each workday. Prevent debris from entering or blocking roof drains and conductors. Use roof-drain plugs specifically designed for this purpose. Remove roof-drain plugs at end of each workday, when no work is taking place, or when rain is forecast.
- C. Verify that rooftop utilities and service piping have been shut off before beginning the Work.
- D. All work require to remove and reinstall rooftop utilities and equipment shall be performed by corresponding licensed contractors.

### 3.2 ROOF TEAR-OFF

- A. General: Notify Owner each day of extent of roof tear-off proposed for that day and obtain authorization to proceed.
- B. Roof Tear-Off: Remove existing roofing membrane and other membrane roofing system components down to the deck.
  - 1. Remove fasteners from deck.

### 3.3 DECK PREPARATION

- A. Inspect deck after tear-off of membrane roofing system.
- B. Verify that wood substrate is visibly dry and free of moisture. Test for capillary moisture by plastic sheet method according to ASTM D 4263. Do not proceed with roofing work if moisture condenses under the plastic sheet.
- C. If broken or loose fasteners that secure deck panels to one another or to structure are observed or if deck appears or feels inadequately attached, immediately notify Architect. Do not proceed with installation until directed by Architect.
- D. If deck surface is not suitable for receiving new roofing or if structural integrity of deck is suspect, immediately notify Architect. Do not proceed with installation until directed by Architect.

### 3.4 TEMPORARY ROOFING MEMBRANE

- A. Install approved temporary roofing membrane over area to be reroofed.
- B. Remove temporary roofing membrane before installing new roofing membrane.

### 3.5 ROOF RE-COVER PREPARATION

- A. Remove blisters, ridges, buckles, and other substrate irregularities from existing roofing membrane that inhibit new recover boards from conforming to substrate.
  - 1. Verify that existing substrate is dry before proceeding with installation. Spot check substrates with an electrical capacitance moisture-detection meter.
  - 2. Remove materials that are wet or damp.

### 3.6 EXISTING BASE FLASHINGS

- A. Remove existing base flashings around parapets, curbs, walls, and penetrations.
  - 1. Clean substrates of contaminants such as asphalt, sheet materials, dirt, and debris.
- B. Do not damage metal counterflashings that are to remain. Replace metal counterflashings damaged during removal with counterflashings of same metal, weight or thickness, and finish.
- C. Remove existing parapet sheathing and replace with new pressure-preservative-treated plywood sheathing, 19/32 inch thick. If parapet framing has deteriorated, immediately notify Architect.

### 3.7 DISPOSAL

- A. Collect and place demolished materials in containers. Promptly dispose of demolished materials. Do not allow demolished materials to accumulate on-site.
- B. Transport and legally dispose of demolished materials off Owner's property.

END OF SECTION 070150

SECTION 075419 - POLYVINYL-CHLORIDE (PVC) ROOFING

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
1. Mechanically fastened PVC membrane roofing system.

1.2 PERFORMANCE REQUIREMENTS

- A. General Performance: Installed membrane roofing and base flashings shall withstand specified uplift pressures, thermally induced movement, and exposure to weather without failure due to defective manufacture, fabrication, installation, or other defects in construction. Membrane roofing and base flashings shall remain watertight.
- B. Material Compatibility: Provide roofing materials that are compatible with one another under conditions of service and application required, as demonstrated by membrane roofing manufacturer based on testing and field experience.
- C. Roofing System Design: Provide membrane roofing system that is identical to systems that have been successfully tested by a qualified testing and inspecting agency to resist uplift pressure calculated according to ASCE/SEI 7.
1. Design wind speed: 90 m.p.h.
- D. FM Approvals Listing: Provide membrane roofing, base flashings, and component materials that comply with requirements in FM Approvals 4450 and FM Approvals 4470 as part of a membrane roofing system, and that are listed in FM Approvals' "RoofNav" for Class 1 or noncombustible construction, as applicable. Identify materials with FM Approvals markings.
1. Fire/Windstorm Classification: Class 1A-90.
  2. Hail Resistance: MH.
- E. Energy Performance: Provide roofing system that is listed on the DOE's ENERGY STAR "Roof Products Qualified Product List" for low-slope roof products.

1.3 SUBMITTALS

- A. Product Data: For each type of product indicated.
- B. Shop Drawings: For roofing system. Include plans, elevations, sections, details, and attachments to other work.
- C. Samples for Verification: For the following products:
1. Sheet roofing, of color specified.

D. Manufacturer Certificates: Signed by roofing manufacturer certifying that roofing system complies with requirements specified in "Performance Requirements" Article.

1. Submit evidence of compliance with performance requirements.

E. Research/evaluation reports.

F. Field quality-control reports.

G. Maintenance data.

#### 1.4 QUALITY ASSURANCE

A. Installer Qualifications: A qualified firm that is approved, authorized, or licensed by membrane roofing system manufacturer to install manufacturer's product.

B. Source Limitations: Obtain components including roof insulation fasteners for membrane roofing system from same manufacturer as membrane roofing.

C. Exterior Fire-Test Exposure: ASTM E 108, Class A; for application and roof slopes indicated, as determined by testing identical membrane roofing materials by a qualified testing agency. Materials shall be identified with appropriate markings of applicable testing agency.

D. Preinstallation Roofing Conference: Conduct conference at Project site.

#### 1.5 WARRANTY

A. Special Warranty: DFCM Roofing Warranty Form, without monetary limitation, in which manufacturer agrees to repair or replace components of membrane roofing system that fail in materials or workmanship within specified warranty period.

1. Manufacturer's Warranty Period: 20 years from date of Substantial Completion.

2. Contractor workmanship warranty period: 5 years from date of substantial completion on DFCM contractor warranty.

3. A DFCM history record is required on roofing system.

### PART 2 - PRODUCTS

#### 2.1 PVC MEMBRANE ROOFING

A. PVC Sheet: ASTM D 4434, Type III, fabric reinforced and fabric backed.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. Carlisle SynTec, Incorporated.

- b. Cooley Engineered Membranes; Div. of Cooley Group.
  - c. Custom Seal Roofing.
  - d. Duro-Last Roofing, Inc.
  - e. Flex Membranes International, Inc.
  - f. GAF Materials Corporation.
  - g. GenFlex Roofing Systems.
  - h. Johns Manville.
  - i. Mule-Hide Products Co., Inc.
  - j. Sarnafil Inc.
  - k. Stevens Roofing Systems.
  - l. Versico Incorporated.
2. Thickness: 60 mils, nominal.
  3. Exposed Face Color: White.

## 2.2 AUXILIARY MEMBRANE ROOFING MATERIALS

- A. General: Auxiliary membrane roofing materials recommended by roofing system manufacturer for intended use, and compatible with membrane roofing.
  1. Pre-manufactured accessories are required for all pipe flashings, inside and outside corners and any other location pre-manufactured accessories are available.
- B. Sheet Flashing: Manufacturer's standard sheet flashing of same material, type, reinforcement, thickness, and color as PVC sheet membrane.
- C. Metal Termination Bars: Manufacturer's standard, predrilled stainless-steel or aluminum bars, approximately 1 by 1/8 inch thick; with anchors.
- D. Fasteners: Factory-coated steel fasteners and metal or plastic plates complying with corrosion-resistance provisions in FM Approvals 4470, designed for fastening membrane to substrate, and acceptable to membrane roofing system manufacturer.
- E. Miscellaneous Accessories: Provide pourable sealers, preformed cone and vent sheet flashings, preformed inside and outside corner sheet flashings, T-joint covers, lap sealants, termination reglets, and other accessories.

## 2.3 ROOF INSULATION

- A. Polyisocyanurate Board Insulation: ASTM C 1289, Type II, Class 1, Grade 2, felt or glass-fiber mat facer on both major surfaces.
- B. Tapered Insulation: Provide factory-tapered insulation boards fabricated to slope of 1/4 inch per 12 inches unless otherwise indicated.
- C. Provide preformed saddles, crickets, tapered edge strips, and other insulation shapes where indicated for sloping to drain. Fabricate to slopes indicated.

## 2.4 INSULATION ACCESSORIES

- A. Fasteners: Factory-coated steel fasteners and metal or plastic plates complying with corrosion-resistance provisions in FM Approvals 4470, designed for fastening roof insulation and cover boards to substrate, and acceptable to roofing system manufacturer.
- B. Cover Board: ASTM C 1177/C 1177M, glass-mat, water-resistant gypsum substrate, 1/4 inch thick, factory primed.

## 2.5 WALKWAYS

- A. Flexible Walkways: Factory-formed, nonporous, heavy-duty, slip-resisting, surface-textured walkway pads or rolls, approximately 3/16 inch thick, and acceptable to membrane roofing system manufacturer.

## PART 3 - EXECUTION

### 3.1 INSULATION INSTALLATION

- A. Coordinate installing membrane roofing system components so insulation is not exposed to precipitation or left exposed at the end of the workday.
- B. Comply with membrane roofing system and insulation manufacturer's written instructions for installing roof insulation.
- C. Install tapered insulation under area of roofing to conform to slopes indicated.
- D. Install insulation under area of roofing to achieve required thickness. Where overall insulation thickness is 1-1/2 inches or greater, install two or more layers with joints of each succeeding layer staggered from joints of previous layer a minimum of 6 inches in each direction.
- E. Mechanically Fastened Insulation: Install each layer of insulation and secure to deck using mechanical fasteners specifically designed and sized for fastening specified board-type roof insulation to deck type.
  - 1. Fasten insulation to resist uplift pressure at corners, perimeter, and field of roof.
- F. Install cover boards over insulation with long joints in continuous straight lines with end joints staggered between rows. Offset joints of insulation below a minimum of 6 inches in each direction. Loosely butt cover boards together.
  - 1. Fasten cover boards to resist uplift pressure at corners, perimeter, and field of roof.

### 3.2 MECHANICALLY FASTENED MEMBRANE ROOFING INSTALLATION

- A. Mechanically fasten membrane roofing over area to receive roofing and install according to roofing system manufacturer's written instructions.

1. Install sheet according to ASTM D 5082.
- B. Accurately align membrane roofing and maintain uniform side and end laps of minimum dimensions required by manufacturer. Stagger end laps.
- C. Mechanically fasten or adhere membrane roofing securely at terminations, penetrations, and perimeter of roofing.
- D. Apply membrane roofing with side laps shingled with slope of roof deck where possible.
- E. In-Seam Attachment: Secure one edge of PVC sheet using fastening plates or metal battens centered within membrane seam and mechanically fasten PVC sheet to roof deck.
- F. Seams: Clean seam areas, overlap membrane roofing, and hot-air weld side and end laps of membrane roofing and sheet flashings according to manufacturer's written instructions to ensure a watertight seam installation.
  1. Test lap edges with probe to verify seam weld continuity. Apply lap sealant to seal cut edges of sheet membrane.
  2. Verify field strength of seams a minimum of twice daily and repair seam sample areas.
  3. Repair tears, voids, and lapped seams in roofing that does not comply with requirements.

### 3.3 BASE FLASHING INSTALLATION

- A. Install sheet flashings and preformed flashing accessories and adhere to substrates according to membrane roofing system manufacturer's written instructions.
- B. Apply bonding adhesive to substrate and underside of sheet flashing at required rate and allow to partially dry. Do not apply to seam area of flashing.
- C. Flash penetrations and field-formed inside and outside corners with cured or uncured sheet flashing.
- D. Clean seam areas, overlap, and firmly roll sheet flashings into the adhesive. Hot-air weld side and end laps to ensure a watertight seam installation.
- E. Terminate and seal top of sheet flashings and mechanically anchor to substrate through termination bars.

### 3.4 WALKWAY INSTALLATION

- A. Flexible Walkways: Install walkway products in locations indicated. Heat weld to substrate or adhere walkway products to substrate with compatible adhesive according to roofing system manufacturer's written instructions.

### 3.5 FIELD QUALITY CONTROL

- A. Testing Agency: Owner will engage a qualified testing agency to perform tests and inspections.

- B. Final Roof Inspection: Arrange for roofing system manufacturer's technical personnel to inspect roofing installation on completion.
- C. Repair or remove and replace components of membrane roofing system where inspections indicate that they do not comply with specified requirements.

END OF SECTION 075419

## SECTION 076200 - SHEET METAL FLASHING AND TRIM

### PART 1 - GENERAL

#### 1.1 SUMMARY

- A. Section Includes:
  - 1. Formed roof drainage sheet metal fabrications.
  - 2. Formed low-slope roof sheet metal fabrications.

#### 1.2 SUBMITTALS

- A. Product Data: For each type of product indicated.
- B. Shop Drawings: Show installation layouts of sheet metal flashing and trim, including plans, elevations, expansion-joint locations, and keyed details. Distinguish between shop- and field-assembled work.
  - 1. Include details for forming, joining, supporting, and securing sheet metal flashing and trim, including pattern of seams, termination points, fixed points, expansion joints, expansion-joint covers, edge conditions, special conditions, and connections to adjoining work.
- C. Samples: For each exposed product and for each finish specified.
- D. Maintenance data.
- E. Warranty: Sample of special warranty.

#### 1.3 QUALITY ASSURANCE

- A. Sheet Metal Flashing and Trim Standard: Comply with SMACNA's "Architectural Sheet Metal Manual" unless more stringent requirements are specified or shown on Drawings.
- B. Mockups: Build mockups to verify selections made under sample submittals and to demonstrate aesthetic effects and set quality standards for fabrication and installation.
  - 1. Build mockup of typical roof eave, including built-in gutter fascia fascia trim apron flashing, approximately 10 feet long, including supporting construction cleats, seams, attachments, underlayment, and accessories.
- C. Preinstallation Conference: Conduct conference at Project site.

#### 1.4 WARRANTY

- A. Special Warranty on Finishes: Manufacturer's standard form in which manufacturer agrees to repair finish or replace sheet metal flashing and trim that shows evidence of deterioration of factory-applied finishes within 20 years from date of Substantial Completion.

### PART 2 - PRODUCTS

#### 2.1 SHEET METALS

- A. General: Protect mechanical and other finishes on exposed surfaces from damage by applying a strippable, temporary protective film before shipping.
- B. Metallic-Coated Steel Sheet: Restricted flatness steel sheet, metallic coated by the hot-dip process and prepainted by the coil-coating process to comply with ASTM A 755/A 755M.
  - 1. Zinc-Coated (Galvanized) Steel Sheet: ASTM A 653/A 653M, G90 coating designation; structural quality.
  - 2. Surface: Manufacturer's standard clear acrylic coating on both sides.
  - 3. Exposed Coil-Coated Finish:
    - a. Three-Coat Fluoropolymer: AAMA 621. Fluoropolymer finish containing not less than 70 percent PVDF resin by weight in both color coat and clear topcoat.
  - 4. Color: As selected by Architect from manufacturer's full range.

#### 2.2 UNDERLAYMENT MATERIALS

- A. Self-Adhering, High-Temperature Sheet: Minimum 30 to 40 mils thick, consisting of slip-resisting polyethylene-film top surface laminated to layer of butyl or SBS-modified asphalt adhesive, with release-paper backing; cold applied. Provide primer when recommended by underlayment manufacturer.
  - 1. Thermal Stability: ASTM D 1970; stable after testing at 240 deg F.
  - 2. Low-Temperature Flexibility: ASTM D 1970; passes after testing at minus 20 deg F.

#### 2.3 MISCELLANEOUS MATERIALS

- A. General: Provide materials and types of fasteners, solder, welding rods, protective coatings, separators, sealants, and other miscellaneous items as required for complete sheet metal flashing and trim installation and recommended by manufacturer of primary sheet metal or manufactured item unless otherwise indicated.
- B. Fasteners: Wood screws, annular threaded nails, self-tapping screws, self-locking rivets and bolts, and other suitable fasteners designed to withstand design loads and recommended by manufacturer of primary sheet metal or manufactured item.
  - 1. General: Blind fasteners or self-drilling screws, gasketed, with hex-washer head.

- a. Blind Fasteners: High-strength aluminum or stainless-steel rivets suitable for metal being fastened.
  2. Fasteners for Zinc-Coated (Galvanized) Steel Sheet: Hot-dip galvanized steel according to ASTM A 153/A 153M or ASTM F 2329 or Series 300 stainless steel.
- C. Solder:
1. For Zinc-Coated (Galvanized) Steel: ASTM B 32, Grade Sn50, 50 percent tin and 50 percent lead or Grade Sn60, 60 percent tin and 40 percent lead.
- D. Sealant Tape: Pressure-sensitive, 100 percent solids, gray polyisobutylene compound sealant tape with release-paper backing. Provide permanently elastic, nonsag, nontoxic, nonstaining tape 1/2 inch wide and 1/8 inch thick.
- E. Elastomeric Sealant: ASTM C 920, elastomeric polymer sealant; low modulus; of type, grade, class, and use classifications required to seal joints in sheet metal flashing and trim and remain watertight.

#### 2.4 FABRICATION, GENERAL

- A. General: Custom fabricate sheet metal flashing and trim to comply with recommendations in SMACNA's "Architectural Sheet Metal Manual" that apply to design, dimensions, geometry, metal thickness, and other characteristics of item indicated. Fabricate items at the shop to greatest extent possible.
1. Obtain field measurements for accurate fit before shop fabrication.
  2. Form sheet metal flashing and trim without excessive oil canning, buckling, and tool marks and true to line and levels indicated, with exposed edges folded back to form hems.
  3. Conceal fasteners and expansion provisions where possible. Exposed fasteners are not allowed on faces exposed to view.
- B. Sealed Joints: Form nonexpansion but movable joints in metal to accommodate elastomeric sealant.
- C. Expansion Provisions: Where lapped expansion provisions cannot be used, form expansion joints of intermeshing hooked flanges, not less than 1 inch deep, filled with butyl sealant concealed within joints.
- D. Fabricate cleats and attachment devices from same material as accessory being anchored or from compatible, noncorrosive metal.
- E. Seams: Fabricate nonmoving seams with flat-lock seams. Tin edges to be seamed, form seams, and solder.

#### 2.5 ROOF DRAINAGE SHEET METAL FABRICATIONS

- A. Parapet Scuppers: Fabricate scuppers of dimensions required with closure flange trim to exterior, 4-inch- wide wall flanges to interior, and base extending 4 inches beyond cant or

tapered strip into field of roof. Fasten gravel guard angles to base of scupper. Fabricate from the following materials:

1. Galvanized Steel: 0.028 inch thick.

B. Conductor Heads: Fabricate conductor heads with flanged back and stiffened top edge and of dimensions and shape indicated complete with outlet tubes , exterior flange trim, and built-in overflows. Fabricate from the following materials:

1. Galvanized Steel: 24 GA thick.

## 2.6 LOW-SLOPE ROOF SHEET METAL FABRICATIONS

A. Roof-Edge Flashing (Gravel Stop) and Fascia Cap: Fabricate in minimum 96-inch- long, but not exceeding 10-foot- long, sections. Furnish with 6-inch- wide, joint cover plates. Fabricate from the following materials:

1. Galvanized Steel: 0.028 inch thick.

B. Copings: Fabricate in minimum 96-inch- long, but not exceeding 10-foot- long, sections. Fabricate joint plates of same thickness as copings. Furnish with continuous cleats to support edge of external leg and drill elongated holes for fasteners on interior leg. Miter corners, seal, and solder or weld watertight. Fabricate from the following materials:

1. Galvanized Steel: 0.040 inch thick.

C. Base Flashing: Fabricate from the following materials:

1. Galvanized Steel: 0.028 inch thick.

D. Counterflashing and Flashing Receivers: Fabricate from the following materials:

1. Galvanized Steel: 0.028 inch thick.

E. Roof-Penetration Flashing: Fabricate from the following materials:

1. Galvanized Steel: 0.028 inch thick.

F. Roof-Drain Flashing: Fabricate from the following materials:

1. Copper: 12 oz./sq. ft..

## PART 3 - EXECUTION

### 3.1 UNDERLAYMENT INSTALLATION

A. Self-Adhering Sheet Underlayment: Install self-adhering sheet underlayment, wrinkle free. Comply with temperature restrictions of underlayment manufacturer for installation; use primer rather than nails for installing underlayment at low temperatures. Apply in shingle fashion to shed water, with end laps of not less than 6 inches staggered 24 inches between courses. Overlap side edges not less than 3-1/2 inches. Roll laps with roller. Cover underlayment within 14 days.

### 3.2 INSTALLATION, GENERAL

- A. General: Anchor sheet metal flashing and trim and other components of the Work securely in place, with provisions for thermal and structural movement so that completed sheet metal flashing and trim shall not rattle, leak, or loosen, and shall remain watertight. Use fasteners, solder, welding rods, protective coatings, separators, sealants, and other miscellaneous items as required to complete sheet metal flashing and trim system.
1. Install sheet metal flashing and trim true to line and levels indicated. Provide uniform, neat seams with minimum exposure of solder, welds, and sealant.
  2. Install sheet metal flashing and trim to fit substrates and to result in watertight performance. Verify shapes and dimensions of surfaces to be covered before fabricating sheet metal.
  3. Space cleats not more than 12 inches apart. Anchor each cleat with two fasteners. Bend tabs over fasteners.
  4. Install exposed sheet metal flashing and trim without excessive oil canning, buckling, and tool marks.
  5. Install sealant tape where indicated.
  6. Torch cutting of sheet metal flashing and trim is not permitted.
- B. Metal Protection: Where dissimilar metals will contact each other or corrosive substrates, protect against galvanic action by painting contact surfaces with bituminous coating or by other permanent separation as recommended by SMACNA.
1. Underlayment: Where installing metal flashing directly on cementitious or wood substrates, install a course of felt underlayment and cover with a slip sheet or install a course of polyethylene sheet.
- C. Expansion Provisions: Provide for thermal expansion of exposed flashing and trim. Space movement joints at a maximum of 10 feet with no joints allowed within 24 inches of corner or intersection. Where lapped expansion provisions cannot be used or would not be sufficiently watertight, form expansion joints of intermeshing hooked flanges, not less than 1 inch deep, filled with sealant concealed within joints.
- D. Fastener Sizes: Use fasteners of sizes that will penetrate wood sheathing not less than 1-1/4 inches for nails and not less than 3/4 inch for wood screws.
- E. Seal joints as shown and as required for watertight construction.
- F. Soldered Joints: Clean surfaces to be soldered, removing oils and foreign matter. Pre-tin edges of sheets to be soldered to a width of 1-1/2 inches, except reduce pre-tinning where pre-tinned surface would show in completed Work.
1. Do not use torches for soldering. Heat surfaces to receive solder and flow solder into joint. Fill joint completely. Completely remove flux and spatter from exposed surfaces.
- G. Rivets: Rivet joints in uncoated aluminum where indicated and where necessary for strength.

### 3.3 ROOF FLASHING INSTALLATION

- A. General: Install sheet metal flashing and trim to comply with performance requirements, sheet metal manufacturer's written installation instructions, and SMACNA's "Architectural Sheet

Metal Manual." Provide concealed fasteners where possible, set units true to line, and level as indicated. Install work with laps, joints, and seams that will be permanently watertight and weather resistant.

- B. Roof Edge Flashing: Anchor to resist uplift and outward forces according to recommendations in SMACNA's "Architectural Sheet Metal Manual" and as indicated. Interlock bottom edge of roof edge flashing with continuous cleat anchored to substrate at staggered 3-inch centers.
- C. Copings: Anchor to resist uplift and outward forces according to recommendations in SMACNA's "Architectural Sheet Metal Manual" and as indicated.
  - 1. Interlock exterior bottom edge of coping with continuous cleat anchored to substrate at 16-inch centers.
  - 2. Anchor interior leg of coping with washers and screw fasteners through slotted holes at 24-inch centers.
- D. Pipe or Post Counterflashing: Install counterflashing umbrella with close-fitting collar with top edge flared for elastomeric sealant, extending a minimum of 4 inches over base flashing. Install stainless-steel draw band and tighten.
- E. Counterflashing: Coordinate installation of counterflashing with installation of base flashing. Insert counterflashing in reglets or receivers and fit tightly to base flashing. Extend counterflashing 4 inches over base flashing. Lap counterflashing joints a minimum of 4 inches and bed with sealant.
- F. Roof-Penetration Flashing: Coordinate installation of roof-penetration flashing with installation of roofing and other items penetrating roof. Seal with elastomeric sealant and clamp flashing to pipes that penetrate roof.

#### 3.4 CLEANING AND PROTECTION

- A. Clean exposed metal surfaces of substances that interfere with uniform oxidation and weathering.
- B. Clean and neutralize flux materials. Clean off excess solder and sealants.
- C. Remove temporary protective coverings and strippable films as sheet metal flashing and trim are installed unless otherwise indicated in manufacturer's written installation instructions.

END OF SECTION 076200

SECTION 079200 - JOINT SEALANTS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Silicone joint sealants.

1.2 SUBMITTALS

- A. Product Data: For each joint-sealant product indicated.
- B. Samples: For each kind and color of joint sealant required.
- C. Product test reports.
- D. Preconstruction compatibility and adhesion test reports.
- E. Preconstruction field-adhesion test reports.
- F. Warranties.

1.3 QUALITY ASSURANCE

- A. Testing Agency Qualifications: Qualified according to ASTM C 1021 to conduct the testing indicated.
- B. Preinstallation Conference: Conduct conference at Project site.

1.4 WARRANTY

- A. Special Installer's Warranty: Manufacturer's standard form in which Installer agrees to repair or replace joint sealants that do not comply with performance and other requirements specified in this Section within specified warranty period.
  1. Warranty Period: Two years from date of Substantial Completion.

## PART 2 - PRODUCTS

### 2.1 MATERIALS, GENERAL

- A. VOC Content of Interior Sealants: Provide sealants and sealant primers for use inside the weatherproofing system that comply with the following limits for VOC content when calculated according to 40 CFR 59, Part 59, Subpart D (EPA Method 24):
1. Architectural Sealants: 250 g/L.
  2. Sealant Primers for Nonporous Substrates: 250 g/L.
  3. Sealant Primers for Porous Substrates: 775 g/L.
- B. Liquid-Applied Joint Sealants: Comply with ASTM C 920 and other requirements indicated for each liquid-applied joint sealant specified, including those referencing ASTM C 920 classifications for type, grade, class, and uses related to exposure and joint substrates.
1. Suitability for Immersion in Liquids. Where sealants are indicated for Use I for joints that will be continuously immersed in liquids, provide products that have undergone testing according to ASTM C 1247. Liquid used for testing sealants is deionized water, unless otherwise indicated.
- C. Stain-Test-Response Characteristics: Where sealants are specified to be nonstaining to porous substrates, provide products that have undergone testing according to ASTM C 1248 and have not stained porous joint substrates indicated for Project.
- D. Suitability for Contact with Food: Where sealants are indicated for joints that will come in repeated contact with food, provide products that comply with 21 CFR 177.2600.

### 2.2 SILICONE JOINT SEALANTS

- A. Neutral-Curing Silicone Joint Sealant: ASTM C 920.
1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
    - a. BASF Building Systems.
    - b. Dow Corning Corporation.
    - c. GE Advanced Materials - Silicones.
    - d. May National Associates, Inc.
    - e. Pecora Corporation.
    - f. Polymeric Systems, Inc.
    - g. Schnee-Morehead, Inc.
    - h. Sika Corporation; Construction Products Division.
    - i. Tremco Incorporated.
  2. Type: Single component (S).
  3. Grade: Pourable (P) or nonsag (NS).
  4. Class: 100/50.
  5. Uses Related to Exposure: Nontraffic (NT).

### 2.3 JOINT SEALANT BACKING

- A. Cylindrical Sealant Backings: ASTM C 1330, Type C (closed-cell material with a surface skin), and of size and density to control sealant depth and otherwise contribute to producing optimum sealant performance.
- B. Bond-Breaker Tape: Polyethylene tape or other plastic tape recommended by sealant manufacturer.

### 2.4 MISCELLANEOUS MATERIALS

- A. Primer: Material recommended by joint-sealant manufacturer where required for adhesion of sealant to joint substrates indicated, as determined from preconstruction joint-sealant-substrate tests and field tests.
- B. Cleaners for Nonporous Surfaces: Chemical cleaners acceptable to manufacturers of sealants and sealant backing materials.
- C. Masking Tape: Nonstaining, nonabsorbent material compatible with joint sealants and surfaces adjacent to joints.

## PART 3 - EXECUTION

### 3.1 PREPARATION

- A. Surface Cleaning of Joints: Clean out joints immediately before installing joint sealants to comply with joint-sealant manufacturer's written instructions.
  - 1. Remove laitance and form-release agents from concrete.
  - 2. Clean nonporous joint substrate surfaces with chemical cleaners or other means that do not stain, harm substrates, or leave residues capable of interfering with adhesion of joint sealants.
- B. Masking Tape: Use masking tape where required to prevent contact of sealant or primer with adjoining surfaces that otherwise would be permanently stained or damaged by such contact or by cleaning methods required to remove sealant smears. Remove tape immediately after tooling without disturbing joint seal.

### 3.2 INSTALLATION

- A. Sealant Installation Standard: Comply with recommendations in ASTM C 1193 for use of joint sealants as applicable to materials, applications, and conditions indicated.
- B. Install sealant backings of kind indicated to support sealants during application and at position required to produce cross-sectional shapes and depths of installed sealants relative to joint widths that allow optimum sealant movement capability.
  - 1. Do not leave gaps between ends of sealant backings.

2. Do not stretch, twist, puncture, or tear sealant backings.
  3. Remove absorbent sealant backings that have become wet before sealant application and replace them with dry materials.
- C. Install bond-breaker tape behind sealants where sealant backings are not used between sealants and backs of joints.
- D. Install sealants using proven techniques that comply with the following and at the same time backings are installed:
1. Place sealants so they directly contact and fully wet joint substrates.
  2. Completely fill recesses in each joint configuration.
  3. Produce uniform, cross-sectional shapes and depths relative to joint widths that allow optimum sealant movement capability.
- E. Tooling of Nonsag Sealants: Immediately after sealant application and before skinning or curing begins, tool sealants according to requirements specified in subparagraphs below to form smooth, uniform beads of configuration indicated; to eliminate air pockets; and to ensure contact and adhesion of sealant with sides of joint.
1. Remove excess sealant from surfaces adjacent to joints.
  2. Use tooling agents that are approved in writing by sealant manufacturer and that do not discolor sealants or adjacent surfaces.
  3. Provide concave joint profile per Figure 8A in ASTM C 1193, unless otherwise indicated.
- F. Clean off excess sealant or sealant smears adjacent to joints as the Work progresses by methods and with cleaning materials approved in writing by manufacturers of joint sealants and of products in which joints occur.

END OF SECTION 079200

# **SOUTHERN UTAH UNIVERSITY TECHNOLOGY BUILDING RE-ROOF**




State of Utah—Department of Administrative Services

**DIVISION OF FACILITIES CONSTRUCTION  
AND MANAGEMENT**

4110 State Office Building/Salt Lake City, Utah 84114/598-3018

**DFCM Project #09257730  
Southern Utah University; Cedar City, Utah**

**DIVISION 8  
OPENINGS**

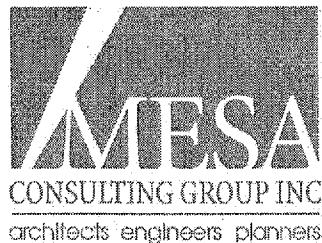

NOT APPLICABLE

# **SOUTHERN UTAH UNIVERSITY TECHNOLOGY BUILDING RE-ROOF**




State of Utah—Department of Administrative Services

**DIVISION OF FACILITIES CONSTRUCTION  
AND MANAGEMENT**

410 State Office Building/Salt Lake City, Utah 84114/538-3018

**DFCM Project #09257730  
Southern Utah University; Cedar City, Utah**

**DIVISION 9  
FINISHES**

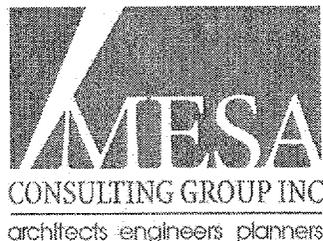

NOT APPLICABLE

# **SOUTHERN UTAH UNIVERSITY TECHNOLOGY BUILDING RE-ROOF**




State of Utah—Department of Administrative Services.

**DIVISION OF FACILITIES CONSTRUCTION  
AND MANAGEMENT**

410 State Office Building/Salt Lake City, Utah 84114/588-3018

**DFCM Project #09257730  
Southern Utah University; Cedar City, Utah**

**DIVISION 10  
SPECIALTIES**

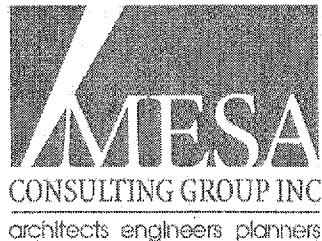

NOT APPLICABLE

# **SOUTHERN UTAH UNIVERSITY TECHNOLOGY BUILDING RE-ROOF**



State of Utah—Department of Administrative Services

**DIVISION OF FACILITIES CONSTRUCTION  
AND MANAGEMENT**

4110 State Office Building/Salt Lake City, Utah 84114/538-3018

**DFCM Project #09257730  
Southern Utah University; Cedar City, Utah**

**DIVISION 11  
EQUIPMENT**



NOT APPLICABLE

# **SOUTHERN UTAH UNIVERSITY TECHNOLOGY BUILDING RE-ROOF**




State of Utah—Department of Administrative Services

**DIVISION OF FACILITIES CONSTRUCTION  
AND MANAGEMENT**

410 State Office Building/Salt Lake City, Utah 84114/538-3018

**DFCM Project #09257730  
Southern Utah University; Cedar City, Utah**

**DIVISION 12  
FURNISHINGS**

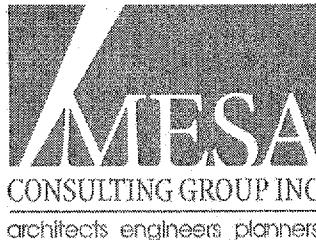

NOT APPLICABLE

# **SOUTHERN UTAH UNIVERSITY TECHNOLOGY BUILDING RE-ROOF**




State of Utah-Department of Administrative Services

**DIVISION OF FACILITIES CONSTRUCTION  
AND MANAGEMENT**

410 State Office Building/Salt Lake City, Utah 84114/588-3018

**DFCM Project #09257730  
Southern Utah University; Cedar City, Utah**

**DIVISION 13  
SPECIAL CONSTRUCTION**

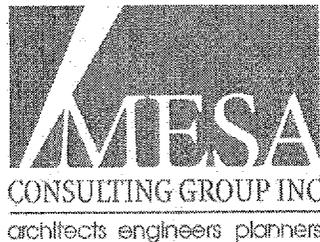

NOT APPLICABLE

# **SOUTHERN UTAH UNIVERSITY TECHNOLOGY BUILDING RE-ROOF**




State of Utah—Department of Administrative Services

**DIVISION OF FACILITIES CONSTRUCTION  
AND MANAGEMENT**

410 State Office Building/Salt Lake City, Utah 84114/508-3018

**DFCM Project #09257730  
Southern Utah University; Cedar City, Utah**

**DIVISION 14  
CONVEYING SYSTEMS**

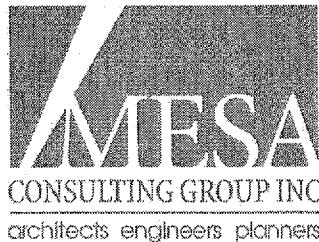

NOT APPLICABLE

# **SOUTHERN UTAH UNIVERSITY TECHNOLOGY BUILDING RE-ROOF**




State of Utah—Department of Administrative Services

**DIVISION OF FACILITIES CONSTRUCTION  
AND MANAGEMENT**

410 State Office Building/Salt Lake City, Utah 84114/538-3018

**DFCM Project #09257730  
Southern Utah University; Cedar City, Utah**

**DIVISION 21  
FIRE SUPPRESSION**

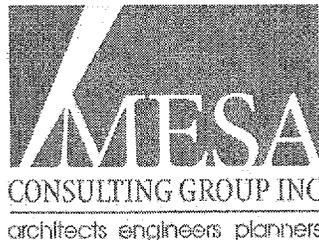

NOT APPLICABLE

# **SOUTHERN UTAH UNIVERSITY TECHNOLOGY BUILDING RE-ROOF**




State of Utah—Department of Administrative Services.

**DIVISION OF FACILITIES CONSTRUCTION  
AND MANAGEMENT**

410 State Office Building/Salt Lake City, Utah 84114/508-3018

**DFCM Project #09257730  
Southern Utah University; Cedar City, Utah**

**DIVISION 22  
PLUMBING**

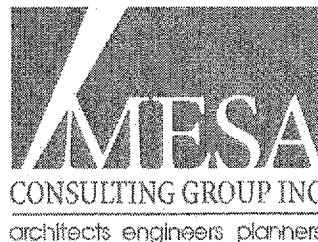

BLANK PAGE

**SECTION 220548 - VIBRATION AND SEISMIC CONTROLS FOR HVAC PIPING AND EQUIPMENT**

**PART 1 - GENERAL**

**1.1 RELATED DOCUMENTS**

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

**1.2 SUMMARY**

- A. This Section includes the following:
  - 1. Isolation pads.
  - 2. Isolation mounts.
  - 3. Restrained elastomeric isolation mounts.
  - 4. Freestanding and restrained spring isolators.
  - 5. Housed spring mounts.
  - 6. Elastomeric hangers.
  - 7. Spring hangers.
  - 8. Spring hangers with vertical-limit stops.
  - 9. Pipe riser resilient supports.
  - 10. Resilient pipe guides.
  - 11. Freestanding and restrained air-mounting system.
  - 12. Restrained vibration isolation roof-curb rails.
  - 13. Seismic snubbers.
  - 14. Restraining braces and cables.
  - 15. Steel and inertia, vibration isolation equipment bases.

**1.3 DEFINITIONS**

- A. IBC: International Building Code.
- B. ICC-ES: ICC-Evaluation Service.

**1.4 PERFORMANCE REQUIREMENTS**

- A. Wind-Restraint Loading:
  - 1. Basic Wind Speed: Per owner's design standards.
  - 2. Building Classification Category: As defined in the IBC.
  - 3. Minimum 10 lb/sq. ft. multiplied by the maximum area of the HVAC component projected on a vertical plane that is normal to the wind direction, and 45 degrees either side of normal.

- B. Seismic-Restraint Loading:
1. Site Class: As defined in the IBC.
  2. Assigned Seismic Use Group or Building Category: As defined in the IBC.
    - a. Component Importance Factor: 1.0.

## 1.5 SUBMITTALS

- A. Product Data: For the following:
1. Include rated load, rated deflection, and overload capacity for each vibration isolation device.
  2. Illustrate and indicate style, material, strength, fastening provision, and finish for each type and size of seismic-restraint component used.
    - a. Tabulate types and sizes of seismic restraints, complete with report numbers and rated strength in tension and shear as evaluated by an evaluation service member of ICC-ES or an agency acceptable to authorities having jurisdiction.
    - b. Annotate to indicate application of each product submitted and compliance with requirements.
  3. Interlocking Snubbers: Include ratings for horizontal, vertical, and combined loads.
- B. Delegated-Design Submittal: For vibration isolation and seismic-restraint details indicated to comply with performance requirements and design criteria, including analysis data signed and sealed by the qualified professional engineer responsible for their preparation.
1. Design Calculations: Calculate static and dynamic loading due to equipment weight and operation, seismic and wind forces required to select vibration isolators, seismic and wind restraints, and for designing vibration isolation bases.
    - a. Coordinate design calculations with wind load calculations required for equipment mounted outdoors. Comply with requirements in other Division 15 Sections for equipment mounted outdoors.
  2. Riser Supports: Include riser diagrams and calculations showing anticipated expansion and contraction at each support point, initial and final loads on building structure, spring deflection changes, and seismic loads. Include certification that riser system has been examined for excessive stress and that none will exist.
  3. Vibration Isolation Base Details: Detail overall dimensions, including anchorages and attachments to structure and to supported equipment. Include auxiliary motor slides and rails, base weights, equipment static loads, power transmission, component misalignment, and cantilever loads.
  4. Seismic- and Wind-Restraint Details:

- a. Design Analysis: To support selection and arrangement of seismic and wind restraints. Include calculations of combined tensile and shear loads.
  - b. Details: Indicate fabrication and arrangement. Detail attachments of restraints to the restrained items and to the structure. Show attachment locations, methods, and spacings. Identify components, list their strengths, and indicate directions and values of forces transmitted to the structure during seismic events. Indicate association with vibration isolation devices.
  - c. Coordinate seismic-restraint and vibration isolation details with wind-restraint details required for equipment mounted outdoors. Comply with requirements in other Division 15 Sections for equipment mounted outdoors.
  - d. Preapproval and Evaluation Documentation: By an evaluation service member of ICC-ES or an agency acceptable to authorities having jurisdiction, showing maximum ratings of restraint items and the basis for approval (tests or calculations).
- C. Coordination Drawings: Show coordination of seismic bracing for HVAC piping and equipment with other systems and equipment in the vicinity, including other supports and seismic restraints.
- D. Welding certificates.
- E. Qualification Data: For professional engineer and testing agency.
- F. Field quality-control test reports.

#### 1.6 QUALITY ASSURANCE

- A. Testing Agency Qualifications: An independent agency, with the experience and capability to conduct the testing indicated, that is a nationally recognized testing laboratory (NRTL) as defined by OSHA in 29 CFR 1910.7, and that is acceptable to authorities having jurisdiction.
- B. Comply with seismic-restraint requirements in the IBC unless requirements in this Section are more stringent.
- C. Welding: Qualify procedures and personnel according to AWS D1.1/D1.1M, "Structural Welding Code - Steel."
- D. Seismic-restraint devices shall have horizontal and vertical load testing and analysis and shall bear anchorage preapproval OPA number from OSHPD, preapproval by ICC-ES, or preapproval by another agency acceptable to authorities having jurisdiction, showing maximum seismic-restraint ratings. Ratings based on independent testing are preferred to ratings based on calculations. If preapproved ratings are not available, submittals based on independent testing are preferred. Calculations (including combining shear and tensile loads) to support seismic-restraint designs must be signed and sealed by a qualified professional engineer.

## PART 2 - PRODUCTS

### 2.1 VIBRATION ISOLATORS

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
1. Amber/Booth Company, Inc.
  2. Kinetics Noise Control.
  3. ISAT
  4. Mason Industries.
  5. Vibration Eliminator Co., Inc.
  6. Prior approved equal.
- B. Pads: Arranged in single or multiple layers of sufficient stiffness for uniform loading over pad area, molded with a nonslip pattern and galvanized-steel baseplates, and factory cut to sizes that match requirements of supported equipment.
1. Resilient Material: Oil- and water-resistant neoprene or rubber.
- C. Mounts: Double-deflection type, with molded, oil-resistant rubber, hermetically sealed compressed fiberglass, or neoprene isolator elements with factory-drilled, encapsulated top plate for bolting to equipment and with baseplate for bolting to structure. Color-code or otherwise identify to indicate capacity range.
1. Materials: Cast-ductile-iron or welded steel housing containing two separate and opposing, oil-resistant rubber or neoprene elements that prevent central threaded element and attachment hardware from contacting the housing during normal operation.
  2. Neoprene: Shock-absorbing materials compounded according to the standard for bridge-bearing neoprene as defined by AASHTO.
- D. Restrained Mounts: All-directional mountings with seismic restraint.
1. Materials: Cast-ductile-iron or welded steel housing containing two separate and opposing, oil-resistant rubber or neoprene elements that prevent central threaded element and attachment hardware from contacting the housing during normal operation.
  2. Neoprene: Shock-absorbing materials compounded according to the standard for bridge-bearing neoprene as defined by AASHTO.
- E. Spring Isolators: Freestanding, laterally stable, open-spring isolators.
1. Outside Spring Diameter: Not less than 80 percent of the compressed height of the spring at rated load.
  2. Minimum Additional Travel: 50 percent of the required deflection at rated load.
  3. Lateral Stiffness: More than 80 percent of rated vertical stiffness.
  4. Overload Capacity: Support 200 percent of rated load, fully compressed, without deformation or failure.

5. Baseplates: Factory drilled for bolting to structure and bonded to 1/4-inch- thick, rubber isolator pad attached to baseplate underside. Baseplates shall limit floor load to 500 psig.
  6. Top Plate and Adjustment Bolt: Threaded top plate with adjustment bolt and cap screw to fasten and level equipment.
- F. Restrained Spring Isolators: Freestanding, steel, open-spring isolators with seismic or limit-stop restraint.
1. Housing: Steel with resilient vertical-limit stops to prevent spring extension due to weight being removed; factory-drilled baseplate bonded to 1/4-inch- thick, neoprene or rubber isolator pad attached to baseplate underside; and adjustable equipment mounting and leveling bolt that acts as blocking during installation.
  2. Restraint: Seismic or limit stop as required for equipment and authorities having jurisdiction.
  3. Outside Spring Diameter: Not less than 80 percent of the compressed height of the spring at rated load.
  4. Minimum Additional Travel: 50 percent of the required deflection at rated load.
  5. Lateral Stiffness: More than 80 percent of rated vertical stiffness.
  6. Overload Capacity: Support 200 percent of rated load, fully compressed, without deformation or failure.
- G. Housed Spring Mounts: Housed spring isolator with integral seismic snubbers.
1. Housing: Ductile-iron or steel housing to provide all-directional seismic restraint.
  2. Base: Factory drilled for bolting to structure.
  3. Snubbers: Vertically adjustable to allow a maximum of 1/4-inch travel up or down before contacting a resilient collar.
- H. Elastomeric Hangers: Single or double-deflection type, fitted with molded, oil-resistant elastomeric isolator elements bonded to steel housings with threaded connections for hanger rods. Color-code or otherwise identify to indicate capacity range.
- I. Spring Hangers: Combination coil-spring and elastomeric-insert hanger with spring and insert in compression.
1. Frame: Steel, fabricated for connection to threaded hanger rods and to allow for a maximum of 30 degrees of angular hanger-rod misalignment without binding or reducing isolation efficiency.
  2. Outside Spring Diameter: Not less than 80 percent of the compressed height of the spring at rated load.
  3. Minimum Additional Travel: 50 percent of the required deflection at rated load.
  4. Lateral Stiffness: More than 80 percent of rated vertical stiffness.
  5. Overload Capacity: Support 200 percent of rated load, fully compressed, without deformation or failure.
  6. Elastomeric Element: Molded, oil-resistant rubber or neoprene. Steel-washer-reinforced cup to support spring and bushing projecting through bottom of frame.
  7. Self-centering hanger rod cap to ensure concentricity between hanger rod and support spring coil.

- J. Spring Hangers with Vertical-Limit Stop: Combination coil-spring and elastomeric-insert hanger with spring and insert in compression and with a vertical-limit stop.
1. Frame: Steel, fabricated for connection to threaded hanger rods and to allow for a maximum of 30 degrees of angular hanger-rod misalignment without binding or reducing isolation efficiency.
  2. Outside Spring Diameter: Not less than 80 percent of the compressed height of the spring at rated load.
  3. Minimum Additional Travel: 50 percent of the required deflection at rated load.
  4. Lateral Stiffness: More than 80 percent of rated vertical stiffness.
  5. Overload Capacity: Support 200 percent of rated load, fully compressed, without deformation or failure.
  6. Elastomeric Element: Molded, oil-resistant rubber or neoprene.
  7. Adjustable Vertical Stop: Steel washer with neoprene washer "up-stop" on lower threaded rod.
  8. Self-centering hanger rod cap to ensure concentricity between hanger rod and support spring coil.
- K. Pipe Riser Resilient Support: All-directional, acoustical pipe anchor consisting of 2 steel tubes separated by a minimum of 1/2-inch- thick neoprene. Include steel and neoprene vertical-limit stops arranged to prevent vertical travel in both directions. Design support for a maximum load on the isolation material of 500 psig and for equal resistance in all directions.
- L. Resilient Pipe Guides: Telescopic arrangement of 2 steel tubes or post and sleeve arrangement separated by a minimum of 1/2-inch- thick neoprene. Where clearances are not readily visible, a factory-set guide height with a shear pin to allow vertical motion due to pipe expansion and contraction shall be fitted. Shear pin shall be removable and reinsertable to allow for selection of pipe movement. Guides shall be capable of motion to meet location requirements.

## 2.2 RESTRAINED VIBRATION ISOLATION ROOF-CURB RAILS

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
1. Amber/Booth Company, Inc.
  2. Kinetics Noise Control.
  3. ISAT
  4. Mason Industries.
  5. Vibration Eliminator Co., Inc.
  6. Prior approved equal.
- B. General Requirements for Restrained Vibration Isolation Roof-Curb Rails: Factory-assembled, fully enclosed, insulated, air- and watertight curb rail designed to resiliently support equipment and to withstand seismic and wind forces.
- C. Lower Support Assembly: Formed sheet-metal section containing adjustable and removable steel springs that support upper frame. Upper frame shall provide continuous support for equipment and shall be captive to resiliently resist seismic and

wind forces. Lower support assembly shall have a means for attaching to building structure and a wood nailer for attaching roof materials, and shall be insulated with a minimum of 2 inches of rigid, glass-fiber insulation on inside of assembly.

- D. Spring Isolators: Adjustable, restrained spring isolators shall be mounted on 1/4-inch-thick, elastomeric vibration isolation pads and shall have access ports, for level adjustment, with removable waterproof covers at all isolator locations. Isolators shall be located so they are accessible for adjustment at any time during the life of the installation without interfering with the integrity of the roof.
1. Restrained Spring Isolators: Freestanding, steel, open-spring isolators with seismic and wind restraint.
    - a. Housing: Steel with resilient vertical-limit stops and adjustable equipment mounting and leveling bolt.
    - b. Outside Spring Diameter: Not less than 80 percent of the compressed height of the spring at rated load.
    - c. Minimum Additional Travel: 50 percent of the required deflection at rated load.
    - d. Lateral Stiffness: More than 80 percent of rated vertical stiffness.
    - e. Overload Capacity: Support 200 percent of rated load, fully compressed, without deformation or failure.
  2. Pads: Arranged in single or multiple layers of sufficient stiffness for uniform loading over pad area, molded with a nonslip pattern and galvanized-steel baseplates, and factory cut to sizes that match requirements of supported equipment.
    - a. Resilient Material: Oil- and water-resistant standard neoprene or natural rubber.
- E. Snubber Bushings: All-directional, elastomeric snubber bushings at least 1/4 inch thick.
- F. Water Seal: Galvanized sheet metal with EPDM seals at corners, attached to upper support frame, extending down past wood nailer of lower support assembly, and counterflashed over roof materials.

### 2.3 VIBRATION ISOLATION EQUIPMENT BASES

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
1. Amber/Booth Company, Inc.
  2. Kinetics Noise Control.
  3. ISAT
  4. Mason Industries.
  5. Vibration Eliminator Co., Inc.
  6. Prior approved equal.

- B. Steel Base: Factory-fabricated, welded, structural-steel bases and rails.
  - 1. Design Requirements: Lowest possible mounting height with not less than 1-inch clearance above the floor. Include equipment anchor bolts and auxiliary motor slide bases or rails.
    - a. Include supports for suction and discharge elbows for pumps.
  - 2. Structural Steel: Steel shapes, plates, and bars complying with ASTM A 36/A 36M. Bases shall have shape to accommodate supported equipment.
  - 3. Support Brackets: Factory-welded steel brackets on frame for outrigger isolation mountings and to provide for anchor bolts and equipment support.
- C. Inertia Base: Factory-fabricated, welded, structural-steel bases and rails ready for placement of cast-in-place concrete.
  - 1. Design Requirements: Lowest possible mounting height with not less than 1-inch clearance above the floor. Include equipment anchor bolts and auxiliary motor slide bases or rails.
    - a. Include supports for suction and discharge elbows for pumps.
  - 2. Structural Steel: Steel shapes, plates, and bars complying with ASTM A 36/A 36M. Bases shall have shape to accommodate supported equipment.
  - 3. Support Brackets: Factory-welded steel brackets on frame for outrigger isolation mountings and to provide for anchor bolts and equipment support.
  - 4. Fabrication: Fabricate steel templates to hold equipment anchor-bolt sleeves and anchors in place during placement of concrete. Obtain anchor-bolt templates from supported equipment manufacturer.

## 2.4 SEISMIC-RESTRAINT DEVICES

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
  - 1. Amber/Booth Company, Inc.
  - 2. Hilti, Inc.
  - 3. ISAT
  - 4. Kinetics Noise Control.
  - 5. Mason Industries.
  - 6. Unistrut; Tyco International, Ltd.
  - 7. Prior approved equal.
- B. General Requirements for Restraint Components: Rated strengths, features, and applications shall be as defined in reports by an evaluation service member of ICC-ES or an agency acceptable to authorities having jurisdiction.

1. Structural Safety Factor: Allowable strength in tension, shear, and pullout force of components shall be at least four times the maximum seismic forces to which they will be subjected.
- C. Snubbers: Factory fabricated using welded structural-steel shapes and plates, anchor bolts, and replaceable resilient isolation washers and bushings.
  1. Anchor bolts for attaching to concrete shall be seismic-rated, drill-in, and stud-wedge or female-wedge type.
  2. Resilient Isolation Washers and Bushings: Oil- and water-resistant neoprene.
  3. Maximum 1/4-inch air gap, and minimum 1/4-inch- thick resilient cushion.
- D. Channel Support System: MFMA-3, shop- or field-fabricated support assembly made of slotted steel channels with accessories for attachment to braced component at one end and to building structure at the other end and other matching components and with corrosion-resistant coating; and rated in tension, compression, and torsion forces.
- E. Restraint Cables: -steel cables with end connections made of steel assemblies with thimbles, brackets, swivel, and bolts designed for restraining cable service; and with a minimum of two clamping bolts for cable engagement.
- F. Hanger Rod Stiffener: Steel tube or steel slotted-support-system sleeve with internally bolted connections or Reinforcing steel angle clamped to hanger rod.
- G. Bushings for Floor-Mounted Equipment Anchor Bolts: Neoprene bushings designed for rigid equipment mountings, and matched to type and size of anchor bolts and studs.
- H. Bushing Assemblies for Wall-Mounted Equipment Anchorage: Assemblies of neoprene elements and steel sleeves designed for rigid equipment mountings, and matched to type and size of attachment devices used.
- I. Resilient Isolation Washers and Bushings: One-piece, molded, oil- and water-resistant neoprene, with a flat washer face.
- J. Mechanical Anchor Bolts: Drilled-in and stud-wedge or female-wedge type in zinc-coated steel for interior applications and stainless steel for exterior applications. Select anchor bolts with strength required for anchor and as tested according to ASTM E 488. Minimum length of eight times diameter.
- K. Adhesive Anchor Bolts: Drilled-in and capsule anchor system containing polyvinyl or urethane methacrylate-based resin and accelerator, or injected polymer or hybrid mortar adhesive. Provide anchor bolts and hardware with zinc-coated steel for interior applications and stainless steel for exterior applications. Select anchor bolts with strength required for anchor and as tested according to ASTM E 488.

## 2.5 FACTORY FINISHES

- A. Finish: Manufacturer's standard paint applied to factory-assembled and -tested equipment before shipping.

1. Powder coating on springs and housings.
2. All hardware shall be galvanized. Hot-dip galvanize metal components for exterior use.
3. Baked enamel or powder coat for metal components on isolators for interior use.
4. Color-code or otherwise mark vibration isolation and seismic- and wind-control devices to indicate capacity range.

### **PART 3 - EXECUTION**

#### **3.1 EXAMINATION**

- A. Examine areas and equipment to receive vibration isolation and seismic- and wind-control devices for compliance with requirements for installation tolerances and other conditions affecting performance.
- B. Examine roughing-in of reinforcement and cast-in-place anchors to verify actual locations before installation.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.

#### **3.2 APPLICATIONS**

- A. Multiple Pipe Supports: Secure pipes to trapeze member with clamps approved for application by an evaluation service member of ICC-ES or an agency acceptable to authorities having jurisdiction.
- B. Hanger Rod Stiffeners: Install hanger rod stiffeners where indicated or scheduled on Drawings to receive them and where required to prevent buckling of hanger rods due to seismic forces.
- C. Strength of Support and Seismic-Restraint Assemblies: Where not indicated, select sizes of components so strength will be adequate to carry present and future static and seismic loads within specified loading limits.

#### **3.3 VIBRATION-CONTROL AND SEISMIC-RESTRAINT DEVICE INSTALLATION**

- A. Comply with requirements in Division 7 Section "Roof Accessories" for installation of roof curbs, equipment supports, and roof penetrations.
- B. Equipment Restraints:
  1. Install seismic snubbers on HVAC equipment mounted on vibration isolators. Locate snubbers as close as possible to vibration isolators and bolt to equipment base and supporting structure.
  2. Install resilient bolt isolation washers on equipment anchor bolts where clearance between anchor and adjacent surface exceeds 0.125 inch.

3. Install seismic-restraint devices using methods approved by an evaluation service member of ICC-ES or an agency acceptable to authorities having jurisdiction providing required submittals for component.

C. Piping Restraints:

1. Comply with requirements in MSS SP-127.
2. Space lateral supports a maximum of 40 feet o.c., and longitudinal supports a maximum of 80 feet o.c.
3. Brace a change of direction longer than 12 feet.

D. Install cables so they do not bend across edges of adjacent equipment or building structure.

E. Install seismic-restraint devices using methods approved by an evaluation service member of ICC-ES or an agency acceptable to authorities having jurisdiction providing required submittals for component.

F. Install bushing assemblies for anchor bolts for floor-mounted equipment, arranged to provide resilient media between anchor bolt and mounting hole in concrete base.

G. Install bushing assemblies for mounting bolts for wall-mounted equipment, arranged to provide resilient media where equipment or equipment-mounting channels are attached to wall.

H. Attachment to Structure: If specific attachment is not indicated, anchor bracing to structure at flanges of beams, at upper truss chords of bar joists, or at concrete members.

I. Drilled-in Anchors:

1. Identify position of reinforcing steel and other embedded items prior to drilling holes for anchors. Do not damage existing reinforcing or embedded items during coring or drilling. Notify the structural engineer if reinforcing steel or other embedded items are encountered during drilling. Locate and avoid prestressed tendons, electrical and telecommunications conduit, and gas lines.
2. Do not drill holes in concrete or masonry until concrete, mortar, or grout has achieved full design strength.
3. Wedge Anchors: Protect threads from damage during anchor installation. Heavy-duty sleeve anchors shall be installed with sleeve fully engaged in the structural element to which anchor is to be fastened.
4. Adhesive Anchors: Clean holes to remove loose material and drilling dust prior to installation of adhesive. Place adhesive in holes proceeding from the bottom of the hole and progressing toward the surface in such a manner as to avoid introduction of air pockets in the adhesive.
5. Set anchors to manufacturer's recommended torque, using a torque wrench.
6. Install zinc-coated steel anchors for interior and stainless-steel anchors for exterior applications.

### **3.4 ACCOMMODATION OF DIFFERENTIAL SEISMIC MOTION**

- A. Install flexible connections in piping where they cross seismic joints, where adjacent sections or branches are supported by different structural elements, and where the connections terminate with connection to equipment that is anchored to a different structural element from the one supporting the connections as they approach equipment. Comply with requirements in Division 15 Section "Hydronic Piping" for piping flexible connections.

### **3.5 FIELD QUALITY CONTROL**

- A. Testing Agency: Leave a qualified testing agency to perform tests and inspections.
- B. Perform tests and inspections.
- C. Tests and Inspections:
  - 1. Provide evidence of recent calibration of test equipment by a testing agency acceptable to authorities having jurisdiction.
  - 2. Schedule test with Owner, through Architect, before connecting anchorage device to restrained component (unless postconnection testing has been approved), and with at least seven days' advance notice.
  - 3. Obtain Architect's approval before transmitting test loads to structure. Provide temporary load-spreading members.
  - 4. Test at least four of each type and size of installed anchors and fasteners selected by Architect.
  - 5. Test to 90 percent of rated proof load of device.
  - 6. Measure isolator restraint clearance.
  - 7. Measure isolator deflection.
  - 8. Verify snubber minimum clearances.
  - 9. If a device fails test, modify all installations of same type and retest until satisfactory results are achieved.
- D. Remove and replace malfunctioning units and retest as specified above.
- E. Prepare test and inspection reports.

### **3.6 ADJUSTING**

- A. Adjust isolators after piping system is at operating weight.
- B. Adjust limit stops on restrained spring isolators to mount equipment at normal operating height. After equipment installation is complete, adjust limit stops so they are out of contact during normal operation.
- C. Adjust air-spring leveling mechanism.
- D. Adjust active height of spring isolators.

- E. Adjust restraints to permit free movement of equipment within normal mode of operation.

**3.7 DEMONSTRATION**

- A. Engage a factory-authorized service representative to train Owner's maintenance personnel to adjust, operate, and maintain air-mounting systems. Refer to Division 1 Section "Demonstration and Training."

END OF SECTION 220548

BLANK PAGE

## SECTION 221413 - FACILITY STORM DRAINAGE PIPING

### PART 1 - GENERAL

#### 1.1 SUMMARY

##### A. Section Includes:

1. Pipe, tube, and fittings.
2. Specialty pipe fittings.

#### 1.2 PERFORMANCE REQUIREMENTS

- ##### A. Seismic Performance:
- Storm drainage piping and support and installation shall withstand the effects of earthquake motions determined according to ASCE/SEI 7.

#### 1.3 SUBMITTALS

- ##### A. Product Data:
- For each type of product indicated.
- ##### B. Seismic Qualification Certificates:
- For storm drainage piping, accessories, and components, from manufacturer.
- ##### C. Field quality-control reports.

#### 1.4 QUALITY ASSURANCE

- ##### A. Piping materials shall bear label, stamp, or other markings of specified testing agency.
- ##### B. Comply with NSF/ANSI 14, "Plastics Piping System Components and Related Materials," for plastic piping components. Include marking with "NSF-drain" for plastic drain piping and "NSF-sewer" for plastic sewer piping.

### PART 2 - PRODUCTS

#### 2.1 PIPING MATERIALS

- ##### A. Comply with requirements in "Piping Schedule" Article for applications of pipe, tube, fitting materials, and joining methods for specific services, service locations, and pipe sizes.

#### 2.2 PVC PIPE AND FITTINGS

- ##### A. Solid-Wall PVC Pipe: ASTM D 2665, drain, waste, and vent.

- B. PVC Socket Fittings: ASTM D 2665, made to ASTM D 3311, drain, waste, and vent patterns and to fit Schedule 40 pipe.
- C. Adhesive Primer: ASTM F 656.
  - 1. Use adhesive primer that has a VOC content of 550 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).
- D. Solvent Cement: ASTM D 2564.
  - 1. Use PVC solvent cement that has a VOC content of 510 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).

### 2.3 SPECIALTY PIPE FITTINGS

#### A. Transition Couplings:

- 1. General Requirements: Fitting or device for joining piping with small differences in OD's or of different materials. Include end connections same size as and compatible with pipes to be joined.
- 2. Fitting-Type Transition Couplings: Manufactured piping coupling or specified-piping-system fitting.
- 3. Unshielded, Nonpressure Transition Couplings:
  - a. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
    - 1) Dallas Specialty & Mfg. Co.
    - 2) Fernco Inc.
    - 3) Mission Rubber Company; a division of MCP Industries, Inc.
    - 4) Plastic Oddities; a division of Diverse Corporate Technologies, Inc.
  - b. Standard: ASTM C 1173.
  - c. Description: Elastomeric, sleeve-type, reducing or transition pattern. Include shear ring and corrosion-resistant-metal tension band and tightening mechanism on each end.
  - d. Sleeve Materials:
    - 1) For Plastic Pipes: ASTM F 477, elastomeric seal or ASTM D 5926, PVC.
    - 2) For Dissimilar Pipes: ASTM D 5926, PVC or other material compatible with pipe materials being joined.
- 4. Shielded, Nonpressure Transition Couplings:
  - a. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
    - 1) Cascade Waterworks Mfg. Co.
    - 2) Mission Rubber Company; a division of MCP Industries, Inc.

- b. Standard: ASTM C 1460.
- c. Description: Elastomeric or rubber sleeve with full-length, corrosion-resistant outer shield and corrosion-resistant-metal tension band and tightening mechanism on each end.

### PART 3 - EXECUTION

#### 3.1 PIPING INSTALLATION

- A. Drawing plans, schematics, and diagrams indicate general location and arrangement of piping systems. Indicated locations and arrangements were used to size pipe and calculate friction loss, expansion, pump sizing, and other design considerations. Install piping as indicated unless deviations from layout are approved on coordination drawings.
- B. Install piping in concealed locations unless otherwise indicated and except in equipment rooms and service areas.
- C. Install piping indicated to be exposed and piping in equipment rooms and service areas at right angles or parallel to building walls. Diagonal runs are prohibited unless specifically indicated otherwise.
- D. Install piping above accessible ceilings to allow sufficient space for ceiling panel removal.
- E. Install piping at indicated slopes.
- F. Install piping free of sags and bends.
- G. Install fittings for changes in direction and branch connections.
- H. Install seismic restraints on piping. Comply with requirements for seismic-restraint devices specified in Division 22 Section "Vibration and Seismic Controls for Plumbing Piping and Equipment."
- I. Make changes in direction for storm drainage piping using appropriate branches, bends, and long-sweep bends. Do not change direction of flow more than 90 degrees. Use proper size of standard increasers and reducers if pipes of different sizes are connected. Reducing size of drainage piping in direction of flow is prohibited.
- J. Lay buried building storm drainage piping beginning at low point of each system. Install true to grades and alignment indicated, with unbroken continuity of invert. Place hub ends of piping upstream. Install required gaskets according to manufacturer's written instructions for use of lubricants, cements, and other installation requirements. Maintain swab in piping and pull past each joint as completed.
- K. Install storm drainage piping at the following minimum slopes unless otherwise indicated:
  - 1. Horizontal Storm-Drainage Piping: 2 percent downward in direction of flow.
- L. Install aboveground PVC piping according to ASTM D 2665.

- M. Install underground ABS and PVC piping according to ASTM D 2321.
- N. Do not enclose, cover, or put piping into operation until it is inspected and approved by authorities having jurisdiction.
- O. Install sleeves for piping penetrations of walls, ceilings, and floors. Retain first paragraph below for piping that penetrates an exterior concrete wall or concrete slab.

### 3.2 JOINT CONSTRUCTION

- A. Plastic, Nonpressure-Piping, Solvent-Cemented Joints: Clean and dry joining surfaces. Join pipe and fittings according to the following:
  - 1. Comply with ASTM F 402 for safe-handling practice of cleaners, primers, and solvent cements.
  - 2. PVC Piping: Join according to ASTM D 2855 and ASTM D 2665 Appendixes.

### 3.3 SPECIALTY PIPE FITTING INSTALLATION

- A. Transition Couplings:
  - 1. Install transition couplings at joints of piping with small differences in OD's.
  - 2. In Drainage Piping: Unshielded, nonpressure transition couplings.

### 3.4 HANGER AND SUPPORT INSTALLATION

- A. Comply with requirements for seismic-restraint devices.
- B. Comply with requirements for pipe hanger and support devices.
  - 1. Install carbon-steel pipe hangers for horizontal piping in noncorrosive environments.
  - 2. Vertical Piping: MSS Type 8 or Type 42, clamps.
  - 3. Individual, Straight, Horizontal Piping Runs:
    - a. 100 Feet and Less: MSS Type 1, adjustable, steel clevis hangers.
    - b. Longer Than 100 Feet: MSS Type 43, adjustable roller hangers.
    - c. Longer Than 100 Feet if Indicated: MSS Type 49, spring cushion rolls.
  - 4. Multiple, Straight, Horizontal Piping Runs 100 Feet or Longer: MSS Type 44, pipe rolls. Support pipe rolls on trapeze.
  - 5. Base of Vertical Piping: MSS Type 52, spring hangers.
- C. Support horizontal piping and tubing within 12 inches of each fitting, valve, and coupling.
- D. Support vertical piping and tubing at base and at each floor.
- E. Rod diameter may be reduced one size for double-rod hangers, with 3/8-inch minimum rods.
- F. Install hangers for PVC piping with the following maximum horizontal spacing and minimum rod diameters:

1. NPS 3: 48 inches with 1/2-inch rod.
2. NPS 4 and NPS 5: 48 inches with 5/8-inch rod.

- G. Install supports for vertical PVC piping every 48 inches.
- H. Support piping and tubing not listed above according to MSS SP-69 and manufacturer's written instructions.

### 3.5 CONNECTIONS

- A. Drawings indicate general arrangement of piping, fittings, and specialties.
- B. Connect interior storm drainage piping to exterior storm drainage piping. Use transition fitting to join dissimilar piping materials.
- C. Connect storm drainage piping to roof drains and storm drainage specialties.
1. Install test tees (wall cleanouts) in conductors near floor, and floor cleanouts with cover flush with floor.
- D. Where installing piping adjacent to equipment, allow space for service and maintenance of equipment.

### 3.6 IDENTIFICATION

- A. Identify exposed storm drainage piping. Comply with requirements for identification.

### 3.7 FIELD QUALITY CONTROL

- A. During installation, notify authorities having jurisdiction at least 24 hours before inspection must be made. Perform tests specified below in presence of authorities having jurisdiction.
1. Roughing-in Inspection: Arrange for inspection of piping before concealing or closing-in after roughing-in.
  2. Final Inspection: Arrange for final inspection by authorities having jurisdiction to observe tests specified below and to ensure compliance with requirements.
- B. Reinspection: If authorities having jurisdiction find that piping will not pass test or inspection, make required corrections and arrange for reinspection.
- C. Reports: Prepare inspection reports and have them signed by authorities having jurisdiction.
- D. Test storm drainage piping according to procedures of authorities having jurisdiction or, in absence of published procedures, as follows:
1. Test for leaks and defects in new piping and parts of existing piping that have been altered, extended, or repaired. If testing is performed in segments, submit separate report for each test, complete with diagram of portion of piping tested.

2. Leave uncovered and unconcealed new, altered, extended, or replaced storm drainage piping until it has been tested and approved. Expose work that was covered or concealed before it was tested.
3. Test Procedure: Test storm drainage piping, except outside leaders, on completion of roughing-in. Close openings in piping system and fill with water to point of overflow, but not less than 10-foot head of water. From 15 minutes before inspection starts until completion of inspection, water level must not drop. Inspect joints for leaks.
4. Repair leaks and defects with new materials and retest piping, or portion thereof, until satisfactory results are obtained.
5. Prepare reports for tests and required corrective action.

### 3.8 CLEANING

- A. Clean interior of piping. Remove dirt and debris as work progresses.
- B. Protect drains during remainder of construction period to avoid clogging with dirt and debris and to prevent damage from traffic and construction work.
- C. Place plugs in ends of uncompleted piping at end of day and when work stops.

### 3.9 PIPING SCHEDULE

- A. Flanges and unions may be used on aboveground pressure piping unless otherwise indicated.
- B. Aboveground storm drainage piping NPS 6 and smaller shall be the following:
  1. Solid-wall PVC pipe, PVC socket fittings, and solvent-cemented joints.
  2. Dissimilar Pipe-Material Couplings: Unshielded, nonpressure transition couplings.

END OF SECTION 221413

## SECTION 221423 - STORM DRAINAGE PIPING SPECIALTIES

### PART 1 - GENERAL

#### 1.1 SUMMARY

- A. Section Includes:
1. Roof drains.
  2. Miscellaneous storm drainage piping specialties.
  3. Flashing materials.

#### 1.2 SUBMITTALS

- A. Product Data: For each type of product indicated.

#### 1.3 QUALITY ASSURANCE

- A. Drainage piping specialties shall bear label, stamp, or other markings of specified testing agency.

### PART 2 - PRODUCTS

#### 2.1 METAL ROOF DRAINS

- A. Basis-of-Design Product: Subject to compliance with requirements, provide items from the following or a comparable product:
- B. RD-1 Roof Drain: Smith #1010-C-R duco cast iron body with combined flashing collar and gravel stop, with underdeck clamp and with low profile cast iron dome. Size shown on drawings.
- C. RDO-1 Overflow Roof Drain: Smith #1080-C-R duco cast iron body with combined flashing collar and gravel stop, with underdeck clamp and with low profile cast iron dome. Complete with 2" dam.

#### 2.2 MISCELLANEOUS STORM DRAINAGE PIPING SPECIALTIES

- A. Conductor Nozzles:
1. Description: Bronze body with threaded inlet and bronze wall flange with mounting holes.
  2. Size: Same as connected conductor.

### PART 3 - EXECUTION

#### 3.1 INSTALLATION

- A. Install roof drains at low points of roof areas according to roof membrane manufacturer's written installation instructions. Roofing materials are specified in Division 07 Sections.
  - 1. Install flashing collar or flange of roof drain to prevent leakage between drain and adjoining roofing. Maintain integrity of waterproof membranes where penetrated.
  - 2. Install expansion joints, if indicated, in roof drain outlets.
  - 3. Position roof drains for easy access and maintenance.
- B. Install downspout adapters on outlet of back-outlet parapet roof drains and connect to sheet metal downspouts.
- C. Install conductor nozzles at exposed bottom of conductors where they spill onto grade.

#### 3.2 CONNECTIONS

- A. Comply with requirements for piping specified in Division 22 Sections. Drawings indicate general arrangement of piping, fittings, and specialties.

#### 3.3 FLASHING INSTALLATION

- A. Fabricate flashing from single piece of metal unless large pans, sumps, or other drainage shapes are required. Join flashing according to the following if required:
  - 1. Lead Sheets: Burn joints of 6.0-lb/sq. ft. lead sheets, 0.0938-inch thickness or thicker. Solder joints of 4.0-lb/sq. ft. lead sheets, 0.0625-inch thickness or thinner.
  - 2. Copper Sheets: Solder joints of copper sheets.
- B. Install sheet flashing on pipes, sleeves, and specialties passing through or embedded in floors and roofs with waterproof membrane.
  - 1. Pipe Flashing: Sleeve type, matching the pipe size, with a minimum length of 10 inches and with skirt or flange extending at least 8 inches around pipe.
  - 2. Sleeve Flashing: Flat sheet, with skirt or flange extending at least 8 inches around sleeve.
  - 3. Embedded Specialty Flashing: Flat sheet, with skirt or flange extending at least 8 inches around specialty.
- C. Set flashing on floors and roofs in solid coating of bituminous cement.
- D. Secure flashing into sleeve and specialty clamping ring or device.
- E. Fabricate and install flashing and pans, sumps, and other drainage shapes.

3.4 PROTECTION

- A. Protect drains during remainder of construction period to avoid clogging with dirt or debris and to prevent damage from traffic or construction work.
- B. Place plugs in ends of uncompleted piping at end of each day or when work stops.

END OF SECTION 221423

BLANK PAGE

# **SOUTHERN UTAH UNIVERSITY TECHNOLOGY BUILDING RE-ROOF**




State of Utah—Department of Administrative Services

**DIVISION OF FACILITIES CONSTRUCTION  
AND MANAGEMENT**

4110 State Office Building/Salt Lake City, Utah 84114/538-3018

**DFCM Project #09257730  
Southern Utah University; Cedar City, Utah**

**DIVISION 23  
HEATING, VENTILATING AND  
AIR CONDITIONING**

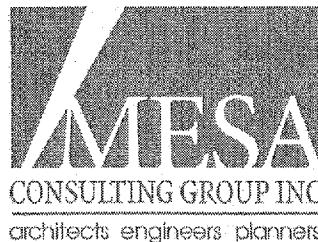

NOT APPLICABLE

# **SOUTHERN UTAH UNIVERSITY TECHNOLOGY BUILDING RE-ROOF**




State of Utah—Department of Administrative Services

**DIVISION OF FACILITIES CONSTRUCTION  
AND MANAGEMENT**

410 State Office Building/Salt Lake City, Utah 84114/530-3018

**DFCM Project #09257730  
Southern Utah University; Cedar City, Utah**

**DIVISION 26  
ELECTRICAL**

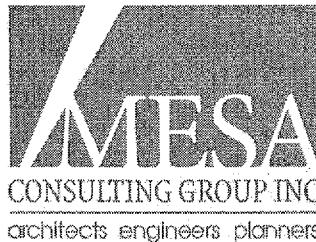

NOT APPLICABLE

SECTION 261000 – ELECTRICAL GENERAL PROVISIONS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS:

- A. Drawings and general provisions of Contract, including General and Supplementary Conditions and Division – 1 Specification sections, apply to work of this section.
- B. Architectural and other applicable documents are considered a part of the electrical documents insofar as they apply as if referred to in full.

1.2 DESCRIPTION OF WORK:

- A. The extent of electrical work is indicated on drawings and/or specified in Division 260000 sections of the specification. Provide all labor, materials, equipment, supervision and service necessary for a complete electrical system. Work includes, but is not necessarily limited to, the following items.
  - 1. Electrical General Provisions
  - 2. Electrical Connections for Equipment
  - 3. Electrical Seismic Control
  - 4. Demolition
  - 5. Conduit Raceways
- B. Use of standard industry symbols together with the special symbols, notes, and instructions indicated on the drawings describe the work, materials, apparatus and systems required as a portion of this work.
- C. Visit the site during the bidding period to determine existing conditions affecting electrical and other work. All costs arising from site conditions and/or preparation shall be included in the base bid. No additional charges will be allowed due to inadequate site inspection.

1.3 DEFINITION OF TERMS:

- A. The following terms used in Division 26 documents are defined as follows:
  - 1)“Provide”: Means furnish, install and connect unless otherwise indicated.
  - 2)“Furnish”: Means purchase and deliver to project site.
  - 3)“Install”: Means to physically install the items in place.
  - 4)“Connect”: Means make final electrical connections for a complete operating piece of equipment.

1.4 RELATED SECTIONS:

- A. Consult all other sections, determine the extent and character of related work and properly coordinate work specified herein with that specified elsewhere to produce a complete installation.

- B. General and Supplementary Conditions: Drawings and general provisions of contract and Division 1 of the Specifications, apply to all Division 26 sections.
- C. Miscellaneous Metal Work:
  - 1. Provide fittings, brackets, backing, supports, rods, welding and pipe as required for support and bracing of raceways, lighting fixtures, etc. See division 5, Metal for material and installation requirements.
- D. Miscellaneous Lumber and framing Work:
  - 1. Provide wood grounds, nailers, blocking, fasteners, and anchorage for support of electrical materials and equipment.
- E. Moisture Protection:
  - 1. Provide membrane clamps, sheet metal flashing, counter flashing, caulking and sealants as required for waterproofing of conduit penetrations and sealing penetrations in or through fire walls, floors and ceiling slabs and foundation walls. All penetrations through vapor barriers at slabs on grade shall be taped and made vaportight. See Division 7, Thermal and Moisture Protection for material and installation requirements.

1.5 INTERPRETATION OF DRAWINGS AND SPECIFICATIONS:

- A. Before bidding, Contractor shall familiarize himself with the drawings, specifications and project site. Submit requests for clarification to Architect/Engineer in writing prior to issuance of final addendum. After signing the contract, the Contractor shall meet the intent, purpose, and function of the Contract Documents. Any costs of materials, labor and equipment arising therefrom, to make each system complete and operable, is the responsibility of the Contractor.

1.6 QUALITY ASSURANCE:

- A. Reference to codes, standards, specifications and recommendations of technical societies, trade organizations and governmental agencies refers to the latest edition of such publications adopted and published prior to submittal of the bid proposed, unless noted otherwise herein. Such codes or standards are considered a part of this specification as through fully repeated herein.
- B. When codes, standards, regulations, etc. allow work of lesser quality or extent than is specified under this Division, nothing in said codes shall be construed or inferred as reducing the quality, requirements or extent of the Drawings and Specifications. Perform work in accordance with applicable requirements of all governing codes, rules and regulations including the following minimum standards, whether statutory or not:
  - 1. National Electric Code (NEC).
  - 2. International Building Code (IBC).
  - 3. International Fire Code (IFC).
  - 4. International Mechanical Code (IMC).
- C. Standards: Comply with the following standards where applicable for equipment and materials specified under this division.
  - 1. UL Underwriters' Laboratories
  - 2. ASTM American Society for Testing materials
  - 3. CBN Certified Ballast Manufacturers

- |          |  |
|----------|--|
| 4. IPCEA | Insulated Power Cable Engineers Association    |
| 5. NEMA  | National Electrical manufacturer's Association |
| 6. ANSI  | American National Standards Institute          |
| 7. ETL   | Electrical Testing laboratories.               |

- D. All electrical apparatus furnished under this Section shall conform to (NEMA) standards and the NEC and bear the Underwriters' Laboratories (UL), label where such label is applicable.
- E. Comply with requirements of State and Local Ordinances. If a conflict occurs between these requirements and the Contract Documents, the most stringent requirements shall govern. The Contractor accepts this responsibility upon submitting his bid, and no extra charge will be allowed after the contract is awarded. This shall not be construed as relieving the Contractor from comply with any requirements of the Contract Documents which may be in excess of the aforementioned requirements, and not contrary to same.
- F. Obtain all permits, inspections, etc. required by authority having jurisdiction. Include all fees in bid. Furnish a certificate of approval to the Owner's Representative from the Inspection Authority at completion of the work.
- G. Employ only qualified craftsmen with at least three years of experience. Workmanship shall be neat, have a good mechanical appearance and conform to best electrical construction practices. Provide a competent superintendent to direct the work at all times. Any person found incompetent shall be discharged from the project and replaced by satisfactory personnel.
- H. Contractor shall have a current state contracting license applicable to type of work to be performed under this contract.

### PART 3 EXECUTION

#### 3.1 INSTALLATION:

- A. Layout electrical work in advance of construction to eliminate unnecessary cutting, drilling, channeling, etc. Where such cutting, drilling or channeling becomes necessary for proper installation; perform with care. Use skilled mechanics of the trades involved. Repair damage to building and equipment at no additional cost to the contract. Cutting work of other Contractors shall be done only with the consent of that Contractor. Cutting structural members shall not be permitted.
- B. Since the drawings of roof installation are made at small scale; outlets, devices, equipment, etc., are indicated only in their approximate location unless dimensioned. Locate outlets and apparatus symmetrically on floors, walls and ceilings where not dimensioned, and coordinate such locations with work of other trades to prevent interferences. Verify all dimensions on the job. Do not scale the electrical drawings, but refer to the architectural and mechanical shop drawings and project drawings for dimensions as applicable.
- C. Perform for other trades, the electrical wiring and connection for all devices, equipment or apparatus. Consult Architectural, Mechanical, and other applicable drawings, and all applicable shop drawings to avoid switches, outlets, and other equipment from being hidden behind doors, cabinets, counters, heating equipment, etc., or from being located in

chalkboards, tackboards, glass panels, etc. Relocate buried electrical devices and/or connections as directed at no additional cost.

- D. Coordinate the location of outlets, devices, connections, and equipment with the supplier of the systems furniture prior to rough-in.

### 3.2 CLEAN:

- A. Clean up all equipment, conduit, fittings, packing cartons and other debris that is a direct result of the installation of the work of this division.
- B. Clean fixtures, interiors and exteriors of all equipment, and raceways. Replace all filters in electrical equipment upon request for Substantial Completion.

### 3.3 POWER OUTAGES:

- A. All power outages required for execution of this work shall occur during non-standard working hours and at the convenience of the Owner. Include all costs for overtime work in bid.
- B. Submit written request at least 7 days in advance of scheduled outage and proceed with outage only after receiving authorization from the Owner's Representative.
- C. Keep all outages to an absolute minimum.

### 3.4 ROOF PENETRATIONS:

- A. Where raceways penetrate roofing or similar structural area, provide appropriate roof jack coordinate with the roofing contractor and the Architect in order to match the vent with the roof construction. The jack shall be sized to fit tightly to raceway for weather-tight seal, and with flange extending a minimum of 9" under roofing in all sides or as required by the roof type of construction. Completely seal opening between inside diameter of roof flashing and outside diameter of penetrating raceways. Coordinate all work with work required under roofing section of specifications.

### 3.5 FIRE PENETRATION SEALS:

- A. Seal all penetrations for work of this section through fire rated floors, walls and ceilings to prevent the spread of smoke, fire, toxic gas or water through the penetration either before, during or after fire. The fire rating of the penetration seal shall be at least that of the floor, wall or ceiling into which it is installed, so that the original fire rating of the floor or wall is maintained as required by Article 300-21 of the National Electrical Code. Where applicable, provide OZ Type CFSE/I and CAFSE/I fire seal fittings for conduit and cable penetrations through concrete and masonry walls, floors, slabs, and similar structures. Where applicable, provide 3M fire barrier sealing penetration system, and/or IPC Flame Safe Fire Stop System, and/or chase Foam fire stop system, including wall wrap, partitions, caps, and other accessories as required. All materials to comply with UL 1479 (ASTM E-814). Comply with manufacturer's instructions and recommendations for installation of sealing fittings and barrier sealing systems.

### 3.6 FINAL REVIEW:

- A. At the time of final review, the project foreman shall accompany the reviewing party, and remove coverplates, panel covers and other access panels as requested, to allow review of the entire electrical system.

END OF SECTION 261000

BLANK PAGE

## SECTION 261070 – ELECTRICAL CONNECTIONS FOR EQUIPMENT

### PART 1 - GENERAL

#### 1.1 RELATED DOCUMENTS:

- A. Drawings and general provisions of Contract, including General and Supplementary conditions and division – 1 specification sections, apply to work of this section.
- B. This section is a Division 26 Basic materials and methods section, and is part of each Division 26 section making reference to electrical connections.

#### 1.2 DESCRIPTION OF WORK:

- A. Extent of electrical connection for equipment includes final electrical connection of all equipment having electrical requirements. Make final connections for all owner furnished equipment. See other applicable portions of specification for building temperature control wiring requirements.
- B. Refer to sections of other Divisions for specific individual equipment power requirements.

#### 1.3 QUALITY ASSURANCE:

- A. NEC COMPLIANCE: Comply with applicable portions of NEC as to type products used and installation of electrical power connections.
- B. UL Labels: Provide electrical connection products and materials which have been UL-listed and labeled.

### PART 2 - PRODUCTS

#### 2.1 GENERAL:

- A. For each electrical connection, provide complete assembly of materials, including but not necessarily limited to, raceways, conductors, cords, cord caps, wiring devices, pressure connectors, terminals (lugs), electrical insulating tape, heat-shrinkable insulating tubing, cable ties, solderless wire nuts, and other items and accessories as needed to complete splices, terminations, and reconnections and connections as required. Crimp on or slip on type splicing materials (insulation displacement type) designed to be used without wiring stripping are not acceptable.
  - 1. Permanently installed fixed equipment – flexible seal-tite conduit from branch circuit terminal equipment, or raceway; to equipment, control cabinet, terminal junction box or wiring terminals. Totally enclose all wiring in raceway.

2. Other methods as required by the National Electrical Code and/or as required by special equipment or field conditions.

### PART 3 - EXECUTION

#### 3.1 INSTALLATION OF ELECTRICAL CONNECTIONS

- A. Make electrical connections in accordance with connector manufacturer's written instructions and with recognized industry practices, and complying with requirements of NEC and NECA's "Standard of Installation" to ensure that products fulfill requirements.
- B. Connect electrical power supply conductors to equipment conductors in accordance with equipment manufacturer's written instructions and wiring diagrams.
- C. Coordinate reinstallation of electrical connections for equipment with roofing installation work.
- D. Verify all electrical loads (voltage, phase, full load amperes, number and point of connections, minimum circuit ampacity, etc.) for existing equipment. Report any variances from electrical characteristics noted on the equipment electrical drawings to Architect before proceeding with rough-work.
- E. Review the existing equipment installation diagrams to determine particular final connection requirements before disconnecting and/or reconnecting each equipment item.

END OF SECTION 261070

## SECTION 261080 – DEMOLITION

### PART 1 - GENERAL

#### 1.1 RELATED DOCUMENTS:

- A. Drawings and general provisions of Contract, including General and Supplementary conditions and Division 1 and Division 2 specification sections, apply to work of this section.
- B. This section is a Division 26 Basic materials and methods section, and is part of each Division 26 section making reference to demolition.

#### 1.2 DESCRIPTION OF WORK:

- A. Extent of major items of demolition work is indicated by drawings. Other demolition work shall be performed as required to maintain system operation.
- B. The intent of the drawings is to indicate major items affected and not to show every device, outlet, fixture, etc. affected by demolition work.
- C. The drawings do not necessarily reflect as-built conditions. The contractor shall visit the jobsite prior to bidding to determine the overall scope of demolition work.
- D. Refer to sections of other Divisions for applicable requirements affecting demolition work.
- E. Refer to Section 261000 for requirements with regard to power outages affecting the operation of existing electrical systems.

#### 1.3 QUALITY ASSURANCE:

- A. NEC COMPLIANCE: Comply with applicable portions of NEC 2008 as to methods for demolition work.

### PART 2 - PRODUCTS

#### 2.1 GENERAL:

- A. Demolition work shall be laid out in advance to eliminate unnecessary cutting, drilling, channeling, etc. Where such cutting, drilling, or channeling becomes necessary, perform with care, use skilled mechanics of the trades involved. Repair damage to building and equipment. Cutting work of other contractors shall be done only with the consent of that contractor. Cutting of structural members shall not be permitted.

## 2.2 PATCHING AND REPAIR

- A. The Contractor is responsible for all demolition, patching and repair of all finished interior surfaces pertaining to the installation of this particular phase of work. All surfaces shall be finished (painted, etc.) to match the adjacent materials, finishes and colors.
- B. Hard surfaces: Whenever demolition is required for the installation of the electrical system, it shall be the responsibility of this contractor to make repairs and/or replacements of hard finish surfaces such as concrete, asphalt, roofing, etc.
- C. The method of patching and repair shall follow good construction practices and all finished surfaces shall match materials and finish wherein the demolition occurred.

## 2.3 EXISTING EQUIPMENT

- A. The following is a part of this project and all costs pertaining thereto shall be included in the base bid.
- B. The new electrical equipment and apparatus shall be coordinated and connected into the existing system as required. Auxiliary systems shall comply, unless otherwise specified.
- C. The existing electrical devices, conduit and/or equipment that for any reason obstructs construction shall be relocated. Provide conduit, wiring, junction boxes, etc. as required to extend existing circuits and systems to relocated devices or equipment.
- D. All existing electrical equipment and systems in portions of the building not being remodeled shall be kept operational, in service and in working condition throughout the entire construction period. Restore any circuits and systems interrupted. Provide temporary panels, temporary wiring and conduit, etc. as required.
- E. Maintain circuit integrity and continuity of all existing circuits and systems that interfere with or are interrupted by remodel work unless those circuits are to be abandoned completely. Maintain all circuits and systems in operation during construction. Provide temporary panels, temporary wiring and conduit, etc. as required.
- F. Existing raceways may be used where possible in place, except as noted. All circuits, conduit and wire that are not used in the remodeled area shall be removed back to the panelboard, where it shall be labeled a spare with circuit number indicated. Re-used raceway shall meet all requirements for new installations.
- G. All existing light fixture that remain or relocate shall be thoroughly cleaned and have new lamps installed. This applies for all interior and exterior light fixtures. Any light fixture not functioning after new lamp replacement must have the ballast replaced and existing circuiting tested and repaired. Replace all broken lenses and/or diffusers.
- H. Obtain permission from the architect and owner's representative before penetrating any ceiling, floor, and wall surfaces.

- I. Any and all equipment having electrical connections that require disconnecting and reconnection at the same or another location throughout the course of construction shall be included as part of this contract.

END OF SECTION 261080

BLANK PAGE

## SECTION 261100 – CONDUIT RACEWAYS

### PART 1 - GENERAL

#### 1.1 RELATED DOCUMENTS:

- A. Drawings and general provisions of Contract, including General and Supplementary conditions and division – 1 specification sections, apply to work of this section.
- B. This section is a Division 26 Basic materials and methods section, and is part of each Division 26 section making reference to electrical raceways and specified herein.

#### 1.2 DESCRIPTION OF WORK:

- A. Extent of raceways is indicated by drawings.
- B. Types of raceways in this section include the following:
  - 1. Electrical Metallic Tubing
  - 2. Intermediate metal Conduit
  - 3. Liquid-tight Flexible Metal conduit
  - 4. Rigid metal Conduit

#### 1.3 QUALITY ASSURANCE:

- A. **MANUFACTURERS:** Firms regularly engaged in manufacture of raceway systems of types and sizes required, whose products have been in satisfactory use in similar service for not less than three (3) years.
- B. **STANDARDS:** Comply with applicable portions of NEMA standards pertaining to raceways. Comply with applicable portions of UL safety standards pertaining to electrical raceway systems; and provide products and components which have been UL-listed and labeled. Comply with NEC requirements as applicable to construction and installation of raceway systems.
- C. **SUBMITTALS:** not required.

### PART 2 - PRODUCTS

#### 2.1 METAL CONDUIT AND TUBING:

- A. Provide metal conduit, tubing and fittings of types, grades, sizes and weights (wall thicknesses) as required with minimum trade size of 3/4".
- B. **RIGID METAL CONDUIT (RMC):** FS WW-C-0581 and ANSI C80.1.

- C. INTERMEDIATE STEEL CONDUIT (IMC): FS WW-C-581.
- D. ALUMINUM CONDUIT: Not acceptable.
- E. MC CABLE: Not acceptable.
- F. RIGID AND INTERMEDIATE STEEL CONDUIT FITTINGS:
  - 1. Provide fully threaded malleable steel couplings; raintight where required by application. Provide double lockouts and metal bushings at all conduit terminations. Install OZ Type B bushings on conduits 1-1/4" and larger.
- G. LIQUID TIGHT FLEXIBLE METAL CONDUIT:
  - 1. Provide liquid-tight, flexible metal conduit; constructed of single strip, flexible continuous, interlocked, and double-wrapped steel; galvanized inside and outside; coated with liquid-tight jacket of flexible polyvinyl chloride (PVC).
- H. LIQUID-TIGHT FLEXIBLE METAL CONDUIT FITTINGS: FS W-F-406, Type 1, Class 3, Style G.
- I. EXPANSION FITTINGS: OZ TYPE AX, or equivalent to suit application.

## 2.2 CONDUIT; TUBING; AND DUCT ACCESSORIES:

- A. Provide conduit, tubing and duct accessories of types and sizes, and materials, complying with manufacturer's published product information, which mate and match conduit and tubing. Provide manufactured spacers in all duct bank runs.

## 2.3 SEALING BUSHINGS:

- A. Provide OZ Type FSK, WSK, or CSMI as required by application. Provide OZ type CSB internal sealing bushings.

## 2.4 CABLE SUPPORTS:

- A. Provide OZ cable supports for vertical risers, type as required by application.

## PART 3 - EXECUTION

### 3.1 INSTALLATION OF ELECTRICAL RACEWAYS

- A. Install electrical raceways where indicated; in accordance with manufacturer's written instructions, applicable requirements of NEC and NECA "Standard of Installation", and in accordance with the following:
  - 1. FEEDERS UNDER 600 VOLTS:

- a. Install interior feeders to panels and motor control centers and individual equipment feeders rated 100 amps and greater, in EMT.
2. BRANCH CIRCUITS, SIGNAL AND CONTROL CIRCUITS, AND INDIVIDUAL EQUIPMENT CIRCUITS RATED LESS THAN 100 AMPS:
  - a. Install in electric metallic tubing (EMT); except in poured walls, with one side in contact with grade, below concrete slab-on-grade or in earth fill, install in non-metallic plastic duct. In areas exposed to weather, moisture, or physical damage, install in GRC or IMC. In suspended slabs, install in EMT. Encase non-metallic duct 1-1/4" and larger in concrete. See duct banks.
- B. Coordinate with other work including metal and roofing deck work, as necessary to interface installation of electrical raceways and the disconnection and reconnection components.
- C. Install raceway in accordance with the following:
  1. Provide a minimum of 12" clearance measured from outside of insulation from flues, steam and hot water piping, etc. Avoid installing raceways in immediate vicinity of boilers and similar heat emitting equipment. Conceal raceways in finished walls, ceilings and floor (other than slab-on-grade) where possible, except in mechanical, electrical and/or communication rooms, conceal all conduit and connections to meters, equipment, and surface mounted cabinets unless exposed work is indicated on the drawings. Run concealed conduits in as direct a line as possible with gradual bends. Where conduit is exposed in mechanical spaces, etc., install parallel with or at right angles to building or room structural lines. Do not install lighting raceway until piping and duct work locations have been determined in order to avoid fixtures being obstructed by overhead equipment.
  2. Where cutting raceway is necessary, remove all inside and outside burrs; make cuts smooth and square with raceway. Paint all field threads (or portions of raceway where corrosion protection has been damaged) with primer and enamel finish coat to match adjacent raceway surface.
  3. Provide a minimum of 1-1/2" from nearest surface of the roof decking to raceway.
- D. Comply with NEC for requirements for installation of pull boxes in long runs.
- E. Cap open ends of conduits and protect other raceways as required against accumulation of dirt and debris. Pull a mandrel and swab through hall conduit before installing conductors. Install a 200 lb. nylon pull cord in each empty conduit run.
- F. Replace all crushed, wrinkled or deformed raceway before installing conductors.
- G. Install liquid-tight flexible conduit for connection of motors, transformers, and other electrical equipment where subject to movement and vibration.
- H. Provide OZ expansion fittings on all conduits crossing building expansion joints, both in slab and suspended.
- I. Provide OZ cable supports in all vertical risers in accordance with NEC 300-19; type as required by application.

- J. Complete installation of electrical raceways before starting installation of cables/conductors within raceways.

END OF SECTION 261100

# **SOUTHERN UTAH UNIVERSITY TECHNOLOGY BUILDING RE-ROOF**



State of Utah—Department of Administrative Services

**DIVISION OF FACILITIES CONSTRUCTION  
AND MANAGEMENT**

4110 State Office Building/Salt Lake City, Utah 84114/530-3010

**DFCM Project #09257730  
Southern Utah University; Cedar City, Utah**

**DIVISION 27  
COMMUNICATIONS**



NOT APPLICABLE

# **SOUTHERN UTAH UNIVERSITY TECHNOLOGY BUILDING RE-ROOF**




State of Utah—Department of Administrative Services

**DIVISION OF FACILITIES CONSTRUCTION  
AND MANAGEMENT**

4110 State Office Building/Salt Lake City, Utah 84114/698-8018

**DFCM Project #09257730  
Southern Utah University; Cedar City, Utah**

**DIVISION 28  
ELECTRONIC SAFETY AND SECURITY**

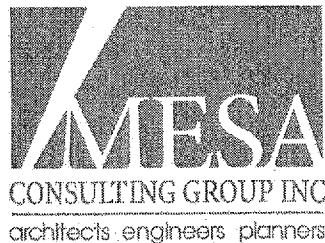

NOT APPLICABLE

# **SOUTHERN UTAH UNIVERSITY TECHNOLOGY BUILDING RE-ROOF**




State of Utah—Department of Administrative Services

**DIVISION OF FACILITIES CONSTRUCTION  
AND MANAGEMENT**

4110 State Office Building/Salt Lake City, Utah 84114/638-3018

**DFCM Project #09257730  
Southern Utah University; Cedar City, Utah**

**DIVISION 31  
EARTHWORK**

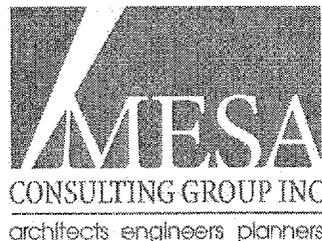

NOT APPLICABLE

# **SOUTHERN UTAH UNIVERSITY TECHNOLOGY BUILDING RE-ROOF**




State of Utah—Department of Administrative Services

**DIVISION OF FACILITIES CONSTRUCTION  
AND MANAGEMENT**

4110 State Office Building/Salt Lake City, Utah 84114/588-3018

**DFCM Project #09257730  
Southern Utah University; Cedar City, Utah**

**DIVISION 32  
EXTERIOR IMPROVEMENTS**

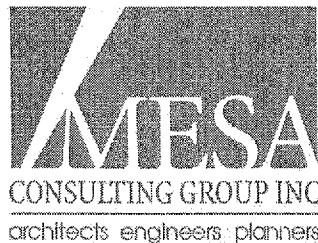

NOT APPLICABLE

# **SOUTHERN UTAH UNIVERSITY TECHNOLOGY BUILDING RE-ROOF**




State of Utah—Department of Administrative Services

**DIVISION OF FACILITIES CONSTRUCTION  
AND MANAGEMENT**

410 State Office Building/Salt Lake City, Utah 84114/538-3018

**DFCM Project #09257730  
Southern Utah University; Cedar City, Utah**

**DIVISION 33  
UTILITIES**

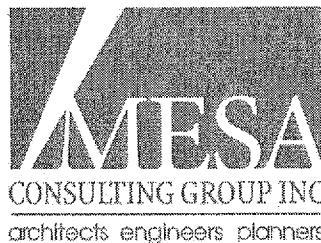

NOT APPLICABLE