



133 North 1330 West
Orem, Utah - 84057
Phone (801) 225-5711

3662 West 2100 South
Salt Lake City, Utah - 84120
Phone (801) 808-9310

1596 W. 2650 S. #108
Ogden, Utah - 84401
Phone (801) 399-9516

**GEOTECHNICAL STUDY
DUCHESNE COURT ADDITION
21554 WEST 9000 SOUTH
DUCHESNE, UTAH**

Project No. 140400

May 22, 2014

Prepared For:

Attention: Mr. Brian Bales
State of Utah – DFCM
4110 State Office Building
Salt Lake City, UT 84114

Prepared By:

EARTHTEC ENGINEERING
Orem Office

Earthtec Engineering

Professional Engineering Services ~ Geotechnical Engineering ~ Geologic Studies ~ Code Inspections ~ Special Inspection / Testing ~ Non-Destructive Examination ~ Failure Analysis

TABLE OF CONTENTS

1.0	EXECUTIVE SUMMARY	1
2.0	INTRODUCTION.....	2
3.0	PROPOSED CONSTRUCTION	2
4.0	GENERAL SITE DESCRIPTION.....	3
5.0	SUBSURFACE EXPLORATION	3
5.1	Soil Exploration	3
5.2	Percolation Testing.....	4
6.0	LABORATORY TESTING.....	4
7.0	SUBSURFACE CONDITIONS.....	5
7.1	Soil Types	5
7.2	Groundwater Conditions.....	5
8.0	SITE GRADING.....	6
8.1	General Site Grading	6
8.2	Temporary Excavations	6
8.3	Fill Material Composition	6
8.4	Fill Placement and Compaction.....	8
8.5	Stabilization Recommendations.....	9
9.0	SEISMIC AND GEOLOGIC CONSIDERATIONS.....	10
9.1	Seismic Design	10
9.2	Faulting.....	10
9.3	Liquefaction Potential.....	11
9.4	Geologic Setting.....	11
10.0	FOUNDATIONS	11
10.1	General.....	11
10.2	Strip/Spread Footings	12
10.3	Estimated Settlements	13
10.4	Lateral Earth Pressures	13
11.0	FLOOR SLABS AND FLATWORK.....	15
12.0	DRAINAGE	15
12.1	Surface Drainage.....	15
13.0	PAVEMENT RECOMMENDATIONS.....	16
14.0	GENERAL CONDITIONS.....	17

TABLE OF CONTENTS (CONTINUED)

TABLES

Table 1: Percolation Test Results	4
Table 2: Laboratory Test Results	5
Table 3: Structural Fill Recommendations	7
Table 4: Free-Draining Fill Recommendations.....	7
Table 5: Design Accelerations	10
Table 6: Lateral Earth Pressures (Static and Dynamic)	14
Table 7: Pavement Section Recommendations.....	16

ATTACHED FIGURES

No. 1	VICINITY MAP
No. 2	SITE PLAN SHOWING LOCATION OF TEST HOLES
Nos. 3 – 13	TEST HOLE LOG
No. 14	LEGEND
No. 15	GRAIN SIZE DISTRIBUTION

1.0 EXECUTIVE SUMMARY

This report presents the results of our geotechnical study for an addition to an existing court building located in Duchesne, Utah. We understand the proposed addition, as currently planned, will consist of a one to two-story structure with the possibility of a basement and include parking and drive areas.

Our field exploration included the drilling a total of eleven (11) test holes to depths of 4 to 8 feet below the existing ground surface. Groundwater was not encountered within the borings at the depths explored. The subsurface soils encountered generally consisted of topsoil overlying very dense native sand soils. Asphalt and fill material was encountered at the surface of the site in the vicinity of Test Hole 3 (TH-3) through Test Hole 8 (TH-8). Any asphalt, undocumented fill material, and topsoil should be removed beneath the entire building footprint, beneath exterior flatwork, and pavement areas.

Based on the results of our field exploration, laboratory testing, and engineering analyses, it is our opinion that the subject site is suitable for the proposed development, provided the recommendations presented herein are followed and implemented during design and construction. Conventional strip and spread footings may be used to support the structure, with foundations placed entirely on uniform native sand soils or entirely on a minimum 18 inches of properly placed and compacted structural fill extending to native soils.

This executive summary provides a general synopsis of our recommendations. Details of our findings, conclusions and recommendations are provided within the body of this report. Failure to consult with Earthtec Engineering (Earthtec) regarding any changes made during design and/or construction of the project from those discussed herein relieves Earthtec from any liability arising from changed conditions at the site. We also strongly recommend that Earthtec observes the building excavations to verify the adequacy of our recommendations presented herein, and that Earthtec performs materials testing and special inspections for this project to provide continuity during construction.

2.0 INTRODUCTION

The project site is located at 21554 West 9000 South in Duchesne, Utah. The general location of the site is shown on Figure No. 1, *Vicinity Map*, at the end of this report.

The purposes of this study were to

- Evaluate the subsurface soil conditions at the site,
- Assess the engineering characteristics of the subsurface soils, and
- Provide geotechnical recommendations for general site grading and the design and construction of foundations, concrete floor slabs, miscellaneous concrete flatwork, and asphalt paved parking and drive areas.

The scope of work completed for this study included field reconnaissance, subsurface exploration, field and laboratory soil testing, geotechnical engineering analysis, and the preparation of this report.

3.0 PROPOSED CONSTRUCTION

We understand that the proposed project consists of constructing a one to two-story addition to an existing building at the subject site. It is our understanding that the proposed addition will be a steel, concrete, and masonry structure. The structure will likely be founded on spread footings with the possibility of a basement. We have based our recommendations in this report on the assumption that foundation loads for the proposed structures will not exceed 5,000 pounds per linear foot for bearing walls, 40,000 pounds for column loads, and 200 pounds per square foot for floor slabs. If structural loads will be greater Earthtec should be notified so that we may review our recommendations and make modifications, if necessary.

In addition to the construction described above, we anticipate that

- Utilities will be installed to service the proposed buildings,
- Exterior concrete flatwork will be placed in the form of curb, gutter, and sidewalks,
- And asphalt paved parking and drive areas will be constructed.

4.0 GENERAL SITE DESCRIPTION

At the time of our subsurface exploration the site was a developed parcel with existing buildings, outbuildings, paved parking and drive areas, and landscaped areas. The ground surface appeared to be relatively flat, thus we anticipate less than 3 feet of cut and fill may be required for site grading. The lot was bounded on the north and east by undeveloped properties, on the south by 9000 South Street, and on the west by 21000 West Street.

5.0 SUBSURFACE EXPLORATION

5.1 Soil Exploration

Under the direction of a qualified member of our geotechnical staff, subsurface explorations were conducted at the site on April 30, 2014 by drilling eleven (11) exploratory test holes to depths of about 4 to 8 feet below the existing ground surface using a truck-mounted hydraulic drill rig. The approximate locations of the test holes are shown on Figure No. 2, *Site Plan Showing Location of Test Holes*. Graphical representations and detailed descriptions of the soils encountered are shown on Figure Nos. 3 through 13, *Test Hole Log* at the end of this report. The stratification lines shown on the logs represent the approximate boundary between soil units; the actual transition may be gradual. Due to potential natural variations inherent in soil deposits, care should be taken in interpolating between and extrapolating beyond exploration points. A key to the symbols and terms on the logs is presented on Figure No. 14, *Legend*.

Samples of the subsurface soils were collected in the test holes at depth intervals of approximately 2½ to 5 feet. Disturbed samples were collected with a 1¾ inch inside diameter split spoon sampler. The split spoon sampler was driven 18 inches into undisturbed soil with a 140 pound hammer free-falling through a distance of 30 inches. The blows required to drive the sampler through the final 12 inches of penetration is called the "N-value" or "blow count," and is recorded as "blows per foot" on the attached test hole logs at the respective sample depths. The blows for each 6 inch interval (or less) are noted on the logs when more than 50 blows per 6 inches (or less) of sampler driving were achieved. The blow count provides a reasonable indication of the in-place relative density of sandy soils, but provides only a limited indication of the relative stiffness of cohesive (clayey)

materials, since the penetration resistance for these soils is a function of the moisture content.

The soil samples collected were classified by visual examination in the field following the guidelines of the Unified Soil Classification System (USCS). The samples were transported to our Orem, Utah laboratory where they will be retained for 30 days following the date of this report and then discarded, unless a written request for additional holding time is received prior to the 30 day limit.

5.2 Percolation Testing

A percolation test was conducted in Test Hole 11 (TH-11). The test was performed at the specified depth by filling the hole with water and measuring the water loss with time. The test was performed several times and the final measured rate is shown in the table below.

Table 1: Percolation Test Results

Test Pit No.	Depth (ft.)	Percolation Rate (min/in)	Soil Type
TH-11	5	16	SM

6.0 LABORATORY TESTING

Representative soil samples collected during our field exploration were tested in the laboratory to assess pertinent engineering properties and to aid in refining field classifications, if needed. Tests performed included natural moisture content, liquid and plastic limits determinations, and mechanical (partial) gradation analyses. The table below summarizes the laboratory test results, which are also included on the attached *Test Hole Logs* at the respective sample depths, and on Figure No. 15, *Grain Size Distribution*.

Table 2: Laboratory Test Results

Test Hole No.	Depth (ft.)	Natural Moisture (%)	Natural Dry Density (pcf)	Atterberg Limits		Grain Size Distribution (%)			Soil Type
				Liquid Limit	Plasticity Index	Gravel (+ #4)	Sand	Silt/Clay (- #200)	
TH-1	4½	3	---	19	NP	11	61	28	SM
TH-3	2½	11	---	---	---	24	55	21	SM
TH-4	6	2	---	24	9	2	67	31	SC
TH-5	2½	7	---	---	---	19	52	29	SM
TH-7	2½	8	---	---	---	7	59	34	SM
TH-8	3	5	---	25	10	4	55	41	SC
TH-10	3½	4	---	23	9	0	64	36	SC

* NP = Non-Plastic

7.0 SUBSURFACE CONDITIONS

7.1 Soil Types

On the surface of the site, we encountered asphalt, fill material, and topsoil which is estimated to extend about 1 to 3½ feet in depth at the test hole locations. Below the fill and topsoil we encountered layers of Clayey Sand (SC), Silty Sand (SM), and Silty Sand with gravel (SM) extending about 4 to 8 feet below the existing ground surface. Based on the blow counts obtained during field exploration, the sand soils had a relative density of very dense.

It should be considered that small diameter soil borings were used during the course of our subsurface exploration. Fill material composition and contacts are difficult to determine from test hole sampling. Variation in fill depths may occur at the site.

7.2 Groundwater Conditions

Groundwater was not encountered during our field exploration to the maximum depths explored of approximately 4 to 8 feet below the existing ground surface. Note that groundwater levels will fluctuate in response to the season, precipitation, snow melt, irrigation, and other on and off-site influences. Quantifying these fluctuations would require long term monitoring, which is beyond the scope of this study. The contractor should be prepared to dewater excavations as needed.

8.0 SITE GRADING

8.1 General Site Grading

All surface vegetation and unsuitable soils (such as topsoil, organic soils, undocumented fill, soft, loose, or disturbed native soils, and any other inapt materials) should be removed from below foundations, floor slabs, exterior concrete flatwork, and pavement areas. We encountered fill material and topsoil on the surface of the site which we estimated to extend about 1 to 3½ feet below the existing ground surface. The fill material and topsoil (including soil with roots larger than about ¼ inch in diameter) should be completely removed, even if found to extend deeper, along with any other unsuitable soils that may be encountered.

8.2 Temporary Excavations

Temporary excavations that are less than 4 feet in depth and above groundwater should have side slopes no steeper than ½H:1V (Horizontal:Vertical). Temporary excavations where water is encountered in the upper 4 feet or that extend deeper than 4 feet below site grades should be sloped or braced in accordance with OSHA¹ requirements for Type C soils.

8.3 Fill Material Composition

The existing fill and native soils may be suitable for use as structural fill provided any they meet the requirements for structural fill below. Excavated soils may be stockpiled for use as fill in landscape areas.

Structural fill is defined as fill material that will ultimately be subjected to any kind of structural loading, such as those imposed by footings, floor slabs, pavements, etc. We recommend that a professional engineer or geologist verify that the structural fill to be used on this project meets the requirements, stated below. We recommend that structural fill consist of imported sandy/gravelly soils meeting the following requirements in the table below:

¹ OSHA Health And Safety Standards, Final Rule, CFR 29, part 1926.

Table 3: Structural Fill Recommendations

Sieve Size/Other	Percent Passing (by weight)
4 inches	100
3/4 inches	70 – 100
No. 4	40 – 80
No. 40	15 – 50
No. 200	0 – 20
Liquid Limit	35 maximum
Plasticity Index	15 maximum

In some situations, particles larger than 4 inches and/or more than 30 percent coarse gravel may be acceptable, but would likely make compaction more difficult and/or significantly reduce the possibility of successful compaction testing. Consequently, more strict quality control measures than normally used may be required, such as using thinner lifts and increased or full time observation of fill placement.

We recommend that utility trenches below any structural load be backfilled using structural fill. Note that most local governments and utility companies require Type A-1-a or A-1-b (AASHTO classification) soils (which overall is stricter than our recommendations for structural fill) be used as backfill above utilities in certain areas. In other areas or situations, utility trenches may be backfilled with the native soil, but the contractor should be aware that native clayey/silty soils may be time consuming to compact due to potential difficulties in controlling the moisture content needed to obtain optimum compaction. All backfill soil should have a maximum particle size of 4 inches, a maximum Liquid Limit of 35 and a maximum Plasticity Index of 15.

If required (i.e. fill in submerged areas), we recommend that free draining granular material (clean sand and/or gravel) meet the following requirements in the table below:

Table 4: Free-Draining Fill Recommendations

Sieve Size/Other	Percent Passing (by weight)
3 inches	100
No. 10	0 – 25
No. 40	0 – 15
No. 200	0 – 5
Plasticity Index	Non-plastic

Three inch minus washed rock (sometimes called river rock or drain rock) and pea gravel materials usually meet these requirements and may be used as free draining fill. If free draining fill will be placed adjacent to soil containing a significant amount of sand or silt/clay, precautions should be taken to prevent the migration of fine soil into the free draining fill. Such precautions should include either placing a filter fabric between the free draining fill and the adjacent soil material, or using a well-graded, clean filtering material approved by the geotechnical engineer.

8.4 Fill Placement and Compaction

Fill should be placed on level, horizontal surfaces. Where fill will be placed on slopes steeper than 5H:1V, the existing ground should be benched prior to placing fill. We recommend bench heights of 1 to 4 feet, with the lowest bench being a minimum 3 feet below adjacent grade and at least 10 feet wide.

The thickness of each lift should be appropriate for the compaction equipment that is used. We recommend a maximum lift thickness prior to compaction of 4 inches for hand operated equipment, 6 inches for most "trench compactors" and 8 inches for larger rollers, unless it can be demonstrated by in-place density tests that the required compaction can be obtained throughout a thicker lift. The full thickness of each lift of structural fill placed should be compacted to at least the following percentages of the maximum dry density, as determined by ASTM D-1557:

- In landscape and other areas not below structurally loaded areas: 90%
- Less than 5 feet of fill below structurally loaded areas: 95%
- Between 5 and 10 feet of fill below structurally loaded areas: 98%

Generally, placing and compacting fill at moisture contents within ± 2 percent of the optimum moisture content, as determined by ASTM D-1557, will facilitate compaction. Typically, the further the moisture content deviates from optimum the more difficult it will be to achieve the required compaction.

Fill should be tested frequently during placement and we recommend early testing to demonstrate that placement and compaction methods are achieving the required

compaction. The contractor is responsible to ensure that fill materials and compaction efforts are consistent so that tested areas are representative of the entire fill.

8.5 Stabilization Recommendations

The topsoil may rut and pump during grading and construction. The likelihood of rutting and/or pumping, and the depth of disturbance, is proportional to the moisture content in the soil, the load applied to the ground surface, and the frequency of the load. Consequently, rutting and pumping can be minimized by avoiding concentrated traffic, minimizing the load applied to the ground surface by using lighter equipment, partially loaded equipment, tracked equipment, by working in dry times of the year, and/or by providing a working surface for equipment.

During grading the soil in any obvious soft spots should be removed and replaced with granular material. If rutting or pumping occurs traffic should be stopped in the area of concern. The soil in rutted areas should be removed and replaced with granular material. In areas where pumping occurs the soil should either be allowed to sit until pore pressures dissipate (several hours to several days) and the soil firms up, or be removed and replaced with granular material. Typically, we recommend removal to a minimum depth of 24 inches. For granular material, we recommend using angular well-graded gravel, such as pit run, or crushed rock with a maximum particle size of four inches. We suggest that the initial lift be approximately 12 inches thick and be compacted with a static roller-type compactor. A finer granular material such as sand, gravelly sand, sandy gravel or road base may also be used. Materials which are more angular and coarse may require thinner lifts in order to achieve compaction. We recommend that the fines content (percent passing the No. 200 sieve) be less than 15%, the liquid limit be less than 35, and the plasticity index be less than 15.

Using a geosynthetic fabric, such as Mirafi 600X or equivalent, may also reduce the amount of material required and avoid mixing of the granular material and the subgrade. If a fabric is used, following removal of disturbed soils and water, the fabric should be placed over the bottom and up the sides of the excavation a minimum of 24 inches. The fabric should be placed in accordance with the manufacturer's recommendations, including proper overlaps. The granular material should then be placed over the fabric in compacted lifts. Again, we

suggest that the initial lift be approximately 12 inches thick and be compacted with a static roller-type compactor.

9.0 SEISMIC AND GEOLOGIC CONSIDERATIONS

9.1 Seismic Design

The State of Utah has adopted the 2012 International Building Code (IBC) for seismic design and the structure should be designed in accordance with Chapter 16 of the IBC. The Site Class definitions in the IBC are based upon the soil properties in the upper 100 feet of the soil profile, according to Chapter 20 in ASCE 7. These properties are determined from sampler blow counts, undrained shear strength values, and/or shear velocity measurements. The code states, "When the soil properties are not known in sufficient detail to determine the site class, Site Class D shall be used unless the building official or geotechnical data determines that Site Class E or F soil is likely to be present at the site." Considering our experience in the vicinity of the site and based on the results of our field exploration, we recommend using Site Class D.

The site is located at approximately 40.179 degrees latitude and -110.388 degrees longitude. Using Site Class D, the design spectral response acceleration parameters are given below.

Table 5: Design Accelerations

S_s	F_a	S_{MS}	S_{DS}
0.364 g	1.509	0.550 g	0.366 g
S₁	F_v	S_{M1}	S_{D1}
0.116 g	2.336	0.271 g	0.181 g

S_s = Mapped spectral acceleration for short periods

S₁ = Mapped spectral acceleration for 1-second period

S_{DS} = $\frac{2}{3}S_{MS} = \frac{2}{3}(F_a \cdot S_s) = 5\%$ damped design spectral response acceleration for short periods

S_{D1} = $\frac{2}{3}S_{MS} = \frac{2}{3}(F_v \cdot S_1) = 5\%$ damped design spectral response acceleration for 1-second period

9.2 Faulting

The subject property is located within the Intermountain Seismic Belt where the potential for active faulting and related earthquakes is present. Based upon published geologic maps², no active faults traverse through or immediately adjacent to the site and the site is not

² U.S. Geological Survey, Quaternary Fault and Fold Database of the United States, November 3, 2010

located within local fault study zones. The nearest mapped fault trace is the Duchesne – Pleasant Valley Fault located about 2 miles south of the site.

9.3 Liquefaction Potential

Liquefaction can occur when saturated subsurface soils below groundwater lose their intergranular strength due to an increase in soil pore water pressures during a dynamic event such as an earthquake.

Loose, saturated sands are most susceptible to liquefaction, but some loose, saturated gravels and relatively sensitive silt to low-plasticity silty clay soils can also liquefy during a seismic event. Subsurface soils were composed of very dense, unsaturated sand soils. The soils encountered at this project do not appear liquefiable, but the liquefaction susceptibility of underlying soils (deeper than our explorations) is not known and would require deeper explorations to quantify. .

9.4 Geologic Setting

The subject property is located in western portions of the Uinta Basin. The elevation of the site ranges from approximately 5,725 feet to 5,730 feet above sea level. The Uintah Basin is a bowl shaped valley that is part of the larger Colorado Plateau Physiographic Province. The Uinta Basin lies south of the Uintah Mountains. The southern rim of the basin is formed by the Tavaputs Plateau of the Book Cliffs, and the western rim is formed by the Wasatch Mountains. The central portion of the basin has an elevation of 5,000 to 5,500 feet. Based on our observations of the site and the referenced geologic map, no other geologic hazards appear to pose a significant risk to the property and the proposed development.

10.0 FOUNDATIONS

10.1 General

The foundation recommendations presented in this report are based on the soil conditions encountered during our field exploration, the results of laboratory testing of samples of the native soils, the site grading recommendations presented in this report, and the foundation loading conditions presented in Section 3.0, *Proposed Construction*, of this report. If loading conditions and assumptions related to foundations are significantly different, Earthtec should

be notified so that we can re-evaluate our design parameters and estimates (higher loads may cause more settlement), and to provide additional recommendations if necessary.

Conventional strip and spread footings may be used to support the proposed structures after appropriate removals as outlined in Section 8.1. Foundations should not be installed on topsoil, undocumented fill, debris, combination soils, organic soils, frozen soil, or in ponded water. If foundation soils become disturbed during construction they should be removed or recompacted.

10.2 Strip/Spread Footings

We recommend that conventional strip and spread foundations be constructed entirely on firm, undisturbed, uniform native sand soils, or entirely on a minimum 18 inches of structural fill extending to undisturbed native soils. For foundation design we recommend the following:

- Footings founded on native soils may be designed using a maximum allowable bearing capacity of 2,000 pounds per square foot. Footings founded on a minimum 18 inches of structural fill may be designed using a maximum allowable bearing capacity of 2,000 pounds per square foot. The values for vertical foundation pressure can be increased by one-third for wind and seismic conditions per Section 1806.1 when used with the Alternative Basic Load Combinations found in Section 1605.3.2 of the 2012 International Building Code.
- Continuous and spot footings should be uniformly loaded and should have a minimum width of 20 and 30 inches, respectively.
- Exterior footings should be placed below frost depth which is determined by local building codes. In general 30 inches of cover is adequate for most sites; however local code should be verified by the end design professional. Interior footings, not subject to frost (heated structures), should extend at least 18 inches below the lowest adjacent grade.
- Foundation walls and footings should be properly reinforced to resist all vertical and lateral loads and differential settlement.
- The bottom of footing excavations should be compacted with at least 4 passes of an approved non-vibratory roller prior to erection of forms or placement of structural fill to densify soils that may have been loosened during excavation and to identify soft spots. If soft areas are encountered, they should be stabilized as recommended in Section 8.5.
- Footing excavations should be observed by the geotechnical engineer prior to beginning footing construction to evaluate whether suitable bearing soils have been exposed and whether excavation bottoms are free of loose or disturbed soils.

- Structural fill used below foundations should extend laterally a minimum of 6 inches for every 12 vertical inches of structural fill placed. For example, if 18 inches of structural fill are required to bring the excavation to footing grade, the structural fill should extend laterally a minimum of 9 inches beyond the edge of the footings on both sides.

10.3 Estimated Settlements

If the proposed foundations are properly designed and constructed using the parameters provided above, we estimate that total settlements should not exceed one inch and differential settlements should be one-half of the total settlement over a 25-foot length of continuous foundation, for non-earthquake conditions. Additional settlement could occur during a seismic event due to ground shaking, if more than 3 feet of grading fill is placed above the existing ground surface, and/or if foundation soils are allowed to become wetted.

10.4 Lateral Earth Pressures

Below grade walls act as soil retaining structures and should be designed to resist pressures induced by the backfill soils. The lateral pressures imposed on a retaining structure are dependent on the rigidity of the structure and its ability to resist rotation. Most retaining walls that can rotate or move slightly will develop an active lateral earth pressure condition. Structures that are not allowed to rotate or move laterally, such as subgrade basement walls, will develop an at-rest lateral earth pressure condition. Lateral pressures applied to structures may be computed by multiplying the vertical depth of backfill material by the appropriate equivalent fluid density. Any surcharge loads in excess of the soil weight applied to the backfill should be multiplied by the appropriate lateral pressure coefficient and added to the soil pressure. For static conditions the resultant forces is applied at about one-third the wall height (measured from bottom of wall). For seismic conditions, the resultant forces are applied at about two-third times the height of the wall both measured from the bottom of the wall. The lateral pressures presented in the table below are based on drained, horizontally placed structural fill (as outlined in this report) as backfill material using a 32° friction angle and a dry unit weight of 135 pcf.

Table 6: Lateral Earth Pressures (Static and Dynamic)

Condition	Case	Lateral Pressure Coefficient	Equivalent Fluid Pressure (pcf)
Active	Static	0.31	41
	Seismic	0.33	45
At-Rest	Static	0.47	63
	Seismic	0.61	83
Passive	Static	3.25	439
	Seismic	5.36	723

*Seismic values combine the static and dynamic values

These pressure values do not include any surcharge, and are based on a relatively level ground surface at the top of the wall and drained conditions behind the wall. It is important that water is not allowed to build up (hydrostatic pressures) behind retaining structures. Retaining walls should incorporate drainage behind the walls as appropriate, and surface water should be directed away from the top and bottom of the walls.

Lateral loads are typically resisted by friction between the underlying soil and footing bottoms. Resistance to sliding may incorporate the friction acting along the base of foundations, which may be computed using a coefficient of friction of soils against concrete of 0.40 for native sands, and 0.55 for structural fill meeting the recommendations presented herein. For allowable stress design, the lateral resistance may be computed using Section 1807 of the 2012 International Building Code and all sections referenced therein. Retaining wall lateral resistance design should further reference Section 1807.2.3 for reference of Safety Factors. Retaining systems are assumed to be founded upon and backfilled with granular structural fill. If backfilling with clay or silt, it is required to contact Earthtec prior to construction for further review and recommendations. The values for lateral foundation pressure can be increased by one-third for wind and seismic conditions per Section 1806.1 when used with the Alternative Basic Load Combinations found in Section 1605.3.2 of the 2012 International Building Code.

The pressure and coefficient values presented above are ultimate; therefore an appropriate factor of safety may need to be applied to these values for design purposes. The appropriate factor of safety will depend on the design condition and should be determined by the project structural engineer.

11.0 FLOOR SLABS AND FLATWORK

Concrete floor slabs and exterior flatwork may be supported on native soils after appropriate removals and grading as outlined in Section 8.1 are completed. We recommend placing a minimum 4 inches of free-draining fill material (see Section 8.3) beneath floor slabs to facilitate construction, act as a capillary break, and aid in distributing floor loads. For exterior flatwork, we recommend placing a minimum 4 inches of roadbase material. Prior to placing the free-draining fill or roadbase materials, the native subgrade should be proof-rolled to identify soft spots, which should be stabilized as discussed above in Section 8.5.

For slab design, we recommend using a modulus of subgrade reaction of 130 pounds per cubic inch. The thickness of slabs supported directly on the ground shall not be less than 3½ inches. To help control normal shrinkage and stress cracking, we recommend that floor slabs have adequate reinforcement for the anticipated floor loads with the reinforcement continuous through interior floor joints, frequent crack control joints, and non-rigid attachment of the slabs to foundation and bearing walls. Special precautions should be taken during placement and curing of all concrete slabs and flatwork. Excessive slump (high water-cement ratios) of the concrete and/or improper finishing and curing procedures used during hot or cold weather conditions may lead to excessive shrinkage, cracking, spalling, or curling of slabs. We recommend all concrete placement and curing operations be performed in accordance with American Concrete Institute (ACI) codes and practices.

12.0 DRAINAGE

12.1 Surface Drainage

As part of good construction practice, precautions should be taken during and after construction to reduce the potential for water to collect near foundation walls. Accordingly, we recommend the following:

- Adequate compaction of foundation backfill should be provided i.e. a minimum of 90% of ASTM D-1557. **Water consolidation methods should not be used.**
- The ground surface should be graded to drain away from the building in all directions. We recommend a minimum fall of 6 inches in the first 10 feet.

- Roof runoff should be collected in rain gutters with downspouts designed to discharge well outside of the backfill limits, or at least 10 feet from foundations, whichever is greater.
- Sprinklers should be aimed away, and all sprinkler components (valves, lines, sprinkler heads) should be placed at least 2 feet from foundation walls. Sprinkler systems should be well maintained, checked for leaks frequently, and repaired promptly. Overwatering at any time should be avoided.
- Any additional precautions which may become evident during construction.

13.0 PAVEMENT RECOMMENDATIONS

We understand that asphalt paved parking and drive areas will be constructed as part of the project. The native soils encountered beneath the topsoil and fill material during our field exploration were predominantly composed of sand. We estimate that a California Bearing Ratio (CBR) value of 10 is appropriate for these soils. If the fill material and topsoil is left beneath concrete flatwork and pavement areas, increased maintenance costs over time should be anticipated.

We anticipate the traffic volume will be about 400 vehicles a day or less for the parking areas, consisting of mostly cars and pickup trucks, with a daily delivery truck and a weekly garbage truck. Based on these traffic parameters, the estimated CBR given above, and the procedures and typical design inputs outlined in the UDOT Pavement Design Manual (1998), we recommend the minimum asphalt pavement section presented below.

Table 7: Pavement Section Recommendations

Asphalt Thickness (in)	Compacted Roadbase Thickness (in)	Compacted Subbase Thickness (in)
3	6	0*
3.5	4	0*

* Stabilization may be required

If the pavement will be required to support construction traffic, more than an occasional semi-tractor or fire truck, or more traffic than listed above, our office should be notified so that we can re-evaluate the pavement section recommendations. The following also apply:

- The subgrade should be prepared by proof rolling to a firm, non-yielding surface, with any identified soft areas stabilized as discussed above in Section 8.5.
- Site grading fills below the pavements should meet structural fill composition and placement recommendations per Sections 8.3 and 8.4 herein.
- Asphaltic concrete, aggregate base and sub-base material composition should meet local, APWA or UDOT requirements.
- Aggregate base and sub-base is compacted to local, APWA, or UDOT requirements, or to at least 95 percent of maximum dry density (ASTM D 1557).
- Asphaltic concrete is compacted to local or UDOT requirements, or to at least 96 percent of the laboratory Marshall density (ASTM D 6927).

14.0 GENERAL CONDITIONS

The exploratory data presented in this report was collected to provide geotechnical design recommendations for this project. The explorations may not be indicative of subsurface conditions outside the study area or between points explored and thus have a limited value in depicting subsurface conditions for contractor bidding. Variations from the conditions portrayed in the test holes may occur and which may be sufficient to require modifications in the design. If during construction, conditions are different than presented in this report, Earthtec should be advised immediately so that the appropriate modifications can be made.

The findings and recommendations presented in this geotechnical report were prepared in accordance with generally accepted geotechnical engineering principles and practice in this area of Utah at this time. No warranty or representation is intended in our proposals, contracts, letters, or reports.

This geotechnical report is based on relatively limited subsurface explorations and laboratory testing. Subsurface conditions may differ in some locations of the site from those described herein, which may require additional analyses and possibly modified recommendations. Thus we strongly recommend consulting with Earthtec regarding any changes made during design and construction of the project from those discussed herein. Failure to consult with Earthtec regarding any such changes relieves Earthtec from any liability arising from changed conditions at the site.


To maintain continuity, Earthtec should also perform materials testing and special inspections for this project. The recommendations presented herein are based on the assumption that an adequate program of tests and observations will be followed during construction to verify compliance with our recommendations. We also assume that we will review the project plans and specifications to verify that our conclusions and recommendations are incorporated and remain appropriate (based on the actual design). Earthtec should be retained to review the final design plans and specifications so comments can be made regarding interpretation and implementation of our geotechnical recommendations in the design and specifications. Earthtec also should be retained to provide observation and testing services during grading, excavation, foundation construction, and other earth-related construction phases of the project.

We appreciate the opportunity of providing our services on this project. If we can answer questions or be of further service, please contact Earthtec at your convenience.

Respectfully;
EARTHTEC ENGINEERING



Sterling M. Howell
Project Geologist




Timothy A. Mitchell, P.E.
Geotechnical Engineer

VICINITY MAP


DUCHESNE COURT HOUSE

21554 WEST 9000 SOUTH

DUCHESNE, UTAH

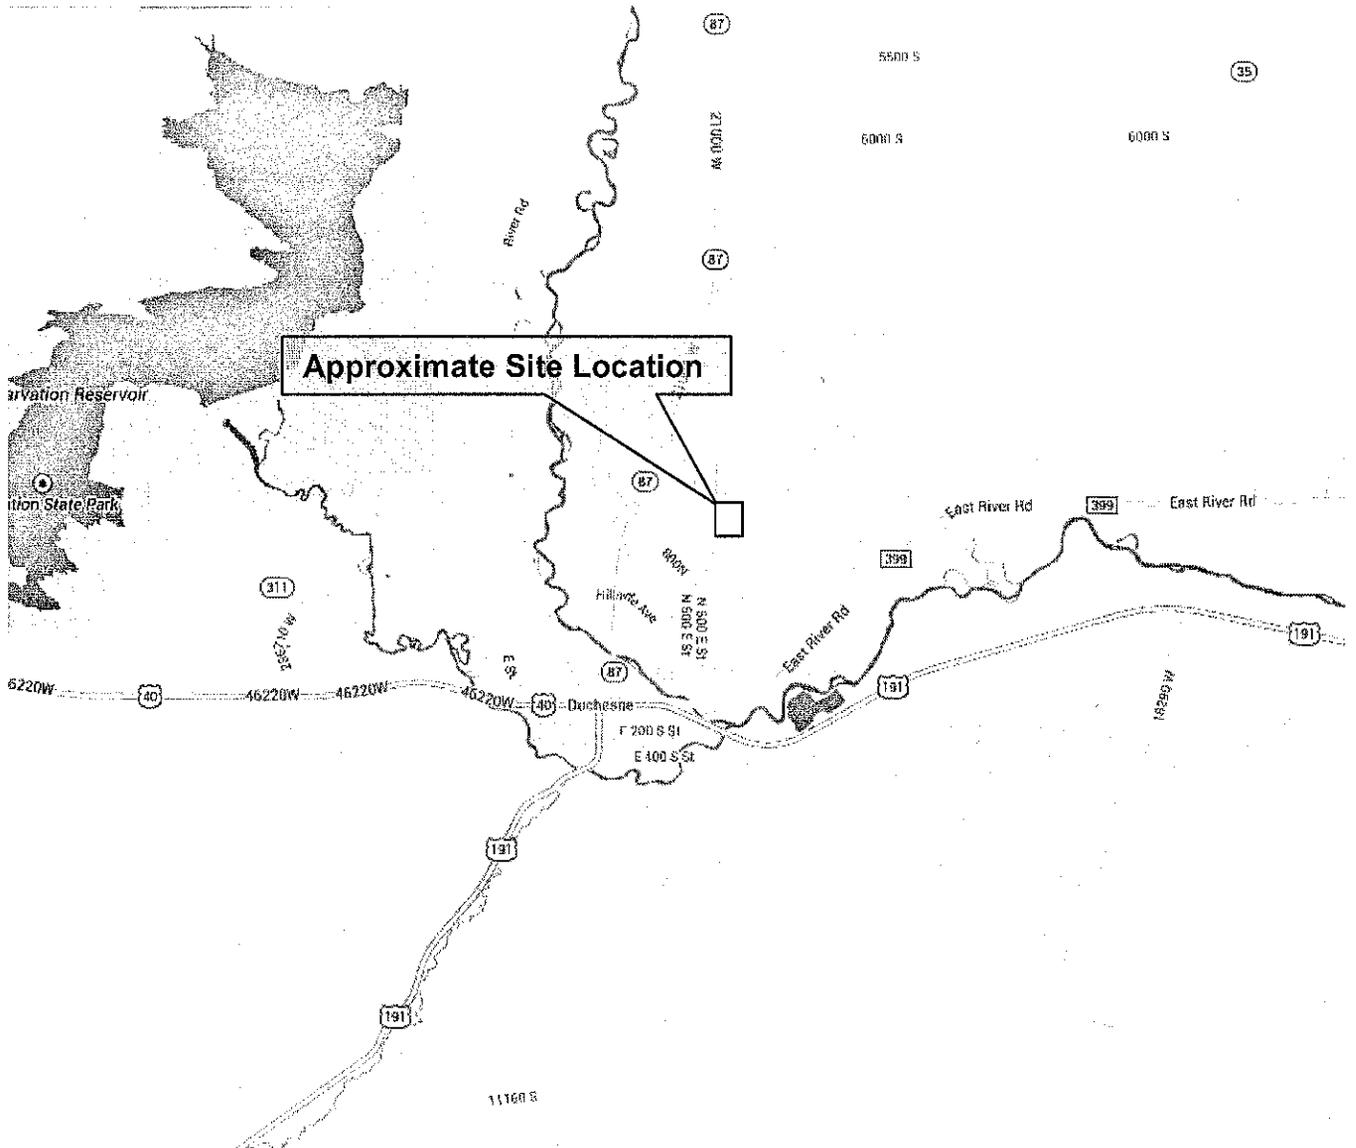

Map provided by Google Maps




PROJECT NO.: 140400



FIGURE NO.: 1


SITE PLAN SHOWING LOCATION OF TEST HOLES

DUCHESNE COURT HOUSE 21554 WEST 9000 SOUTH DUCHESNE, UTAH

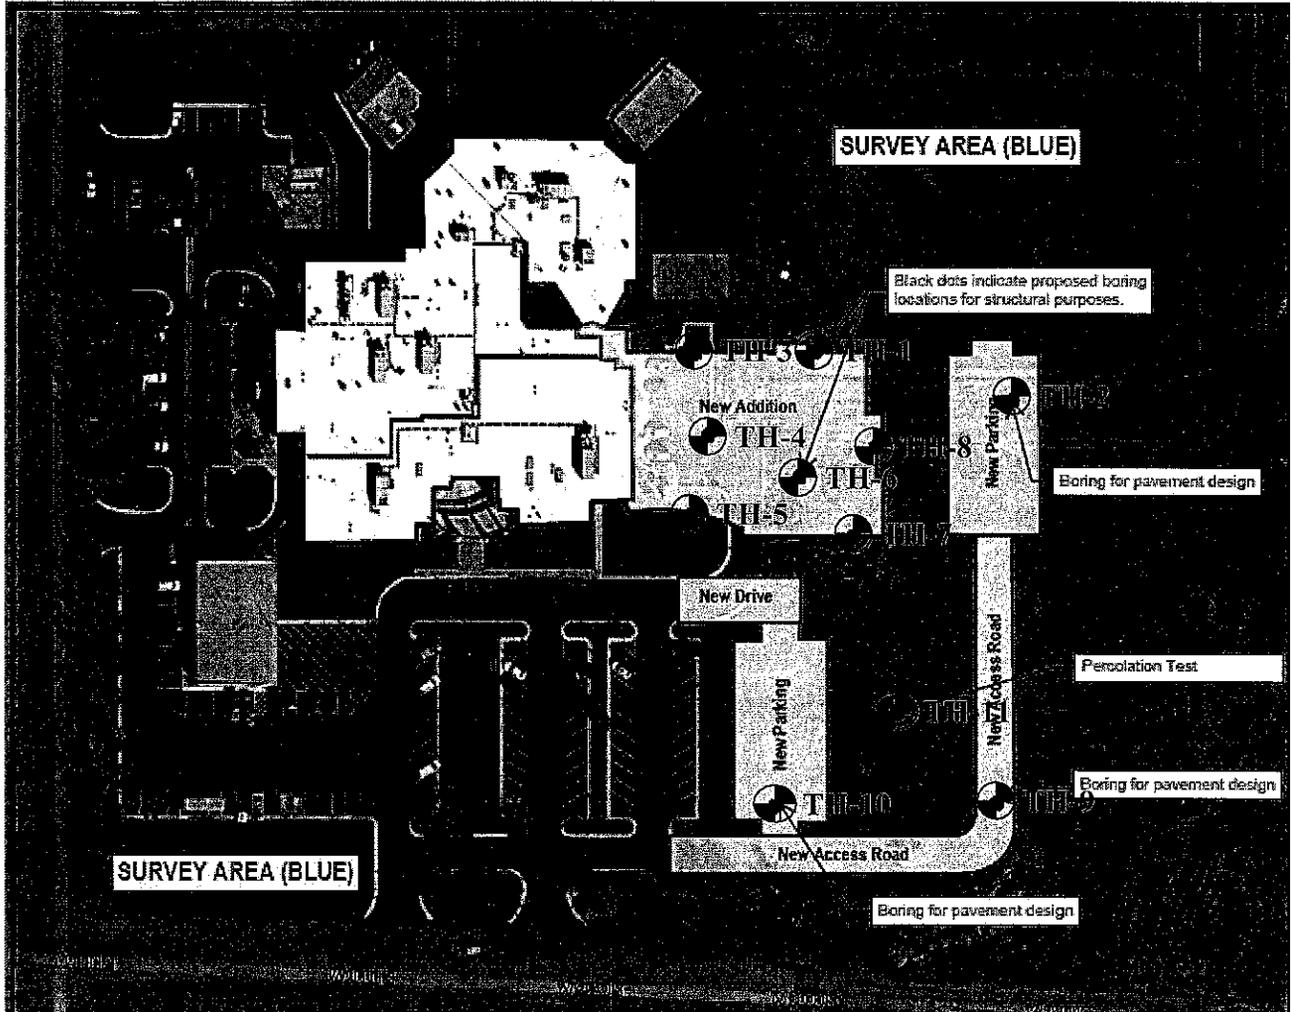

● Approximate Test Hole Location

Site Plan Provided by Client



Not to Scale

TEST HOLE LOG

No.: TH-1

PROJECT: Duchesne Court Addition
 CLIENT: DFCM
 LOCATION: See Figure 2.
 OPERATOR: Earth Core Drilling
 EQUIPMENT: Truck Mounted Hydraulic Drill Rig

Project No.: 140400
 Date: 4/30/2014
 Elevation: Not taken
 Logged By: P. Brinkerhoff

DEPTH TO WATER; INITIAL ∇ Not Encountered

AT COMPLETION ∇ : Not Encountered

Depth (ft.)	Graphic Log	USCS	Description	Samples	TEST RESULTS										
					Blows per foot	Water Cont. (%)	Dry Dens. (pcf)	LL	PI	Gravel (%)	Sand (%)	Fines (%)	Pocket Penet. (tsf)	Other Tests	
1			TOPSOIL, silty sand with gravel, slightly moist, light brown.												
2			Silty SAND, very dense, slightly moist, light brown.												
3		SM			50-3"										
4															
5			Practical equipment refusal at approximately 4½ feet.	X		3		19	NP	11	61	28			
6															
7															
8															
9															
10															
11															
12															
13															
14															
15															
16															
17															
18															
19															
20															
21															
22															
23															
24															
25															
26															

Notes: Groundwater was not encountered during field investigation.

Test Keys

- CBR = California Bearing Ratio
- C = Consolidation
- P = Percolation

PROJECT NO.: 140400



FIGURE NO.: 3

TEST HOLE LOG

No.: TH-2

PROJECT: Duchesne Court Addition
CLIENT: DFCM
LOCATION: See Figure 2.
OPERATOR: Earth Core Drilling
EQUIPMENT: Truck Mounted Hydraulic Drill Rig
DEPTH TO WATER; INITIAL ∇ Not Encountered

Project No.: 140400
Date: 4/30/2014
Elevation: Not taken
Logged By: P. Brinkerhoff

AT COMPLETION ∇ : Not Encountered

Depth (ft.)	Graphic Log	USCS	Description	Samples	TEST RESULTS											
					Blows per foot	Water Cont. (%)	Dry Dens. (pcf)	LL	PI	Gravel (%)	Sand (%)	Fines (%)	Pocket Penet. (tsf)	Other Tests		
1			TOPSOIL, silty sand with gravel, slightly moist, light brown.													
2		SM	Silty SAND, very dense, slightly moist, light brown.													
3					50-2"											
4																
5			Practical equipment refusal at approximately 4 feet.													
6																
7																
8																
9																
10																
11																
12																
13																
14																
15																
16																
17																
18																
19																
20																
21																
22																
23																
24																
25																
26																

Notes: Groundwater was not encountered during field investigation.

Test Keys

- CBR = California Bearing Ratio
- C = Consolidation
- P = Percolation

PROJECT NO.: 140400



FIGURE NO.: 4

TEST HOLE LOG

No.: TH-3

PROJECT: Duchesne Court Addition
CLIENT: DFCM
LOCATION: See Figure 2.
OPERATOR: Earth Core Drilling
EQUIPMENT: Truck Mounted Hydraulic Drill Rig
DEPTH TO WATER; INITIAL ∇ Not Encountered

Project No.: 140400
Date: 4/30/2014
Elevation: Not taken
Logged By: P. Brinkerhoff

AT COMPLETION ∇ : Not Encountered

Depth (ft.)	Graphic Log	USCS	Description	Samples	TEST RESULTS												
					Blows per foot	Water Cont. (%)	Dry Dens. (pcf)	LL	PI	Gravel (%)	Sand (%)	Fines (%)	Pocket Penet. (tsf)	Other Tests			
1			ASPHALT, approximately 4 inches thick.														
2			FILL, silty sand with gravel, slightly moist, brown.														
3					50-5"	11			24	55	21						
4																	
5		SM	Silty SAND, very dense, slightly moist, light brown.														
6					50-1"												
7																	
8						50-2"											
9			Practical equipment refusal at approximately 8 feet.														
10																	
11																	
12																	
13																	
14																	
15																	
16																	
17																	
18																	
19																	
20																	
21																	
22																	
23																	
24																	
25																	
26																	

Notes: Groundwater was not encountered during field investigation.

Test Keys

- CBR = California Bearing Ratio
- C = Consolidation
- P = Percolation

PROJECT NO.: 140400



FIGURE NO.: 5

TEST HOLE LOG

No.: TH-4

PROJECT: Duchesne Court Addition
CLIENT: DFCM
LOCATION: See Figure 2.
OPERATOR: Earth Core Drilling
EQUIPMENT: Truck Mounted Hydraulic Drill Rig
DEPTH TO WATER; INITIAL Not Encountered

Project No.: 140400
Date: 4/30/2014
Elevation: Not taken
Logged By: P. Brinkerhoff

AT COMPLETION : Not Encountered

Depth (ft.)	Graphic Log	USCS	Description	Samples	TEST RESULTS							Other Tests		
					Blows per foot	Water Cont. (%)	Dry Dens. (pcf)	LL	PI	Gravel (%)	Sand (%)		Fines (%)	Pocket Penet. (tsf)
1			ASPHALT, approximately 4 inches thick.											
2			FILL, silty sand with gravel, slightly moist, brown.											
3					50-5"									
4			Clayey SAND, very dense, slightly moist to dry, light brown.											
5		SC												
6					50-1"	2		24	9	2	67	31		
7			Practical equipment refusal at approximately 6 feet.											
8														
9														
10														
11														
12														
13														
14														
15														
16														
17														
18														
19														
20														
21														
22														
23														
24														
25														
26														

Notes: Groundwater was not encountered during field investigation.

Test Keys

- CBR = California Bearing Ratio
- C = Consolidation
- P = Percolation

PROJECT NO.: 140400



FIGURE NO.: 6

TEST HOLE LOG

No.: TH-5

PROJECT: Duchesne Court Addition
CLIENT: DFCM
LOCATION: See Figure 2.
OPERATOR: Earth Core Drilling
EQUIPMENT: Truck Mounted Hydraulic Drill Rig
DEPTH TO WATER; INITIAL ∇ Not Encountered

Project No.: 140400
Date: 4/30/2014
Elevation: Not taken
Logged By: P. Brinkerhoff

AT COMPLETION ∇ : Not Encountered

Depth (ft.)	Graphic Log	USCS	Description	Samples	TEST RESULTS							Other Tests				
					Blows per foot	Water Cont. (%)	Dry Dens. (pcf)	LL	PI	Gravel (%)	Sand (%)		Fines (%)	Pocket Penet. (tsf)		
1			TOPSOIL, silty sand, slightly moist, reddish brown.													
2		SM	Silty SAND with gravel, very dense, slightly moist, reddish brown.													
3						85-6"	7		19	52	29					
4																
5																
6							50-1"									
7																
8							50-3"									
9			Practical equipment refusal at approximately 8 feet.													
10																
11																
12																
13																
14																
15																
16																
17																
18																
19																
20																
21																
22																
23																
24																
25																
26																

Notes: Groundwater was not encountered during field investigation.

Test Keys

CBR = California Bearing Ratio
 C = Consolidation
 P = Percolation

PROJECT NO.: 140400



FIGURE NO.: 7

TEST HOLE LOG

No.: TH-5

PROJECT: Duchesne Court Addition
CLIENT: DFCM
LOCATION: See Figure 2.
OPERATOR: Earth Core Drilling
EQUIPMENT: Truck Mounted Hydraulic Drill Rig
DEPTH TO WATER; INITIAL ∇ Not Encountered

Project No.: 140400
Date: 4/30/2014
Elevation: Not taken
Logged By: P. Brinkerhoff

AT COMPLETION ∇ : Not Encountered

Depth (ft.)	Graphic Log	USCS	Description	Samples	TEST RESULTS									
					Blows per foot	Water Cont. (%)	Dry Dens. (pcf)	LL	PI	Gravel (%)	Sand (%)	Fines (%)	Pocket Penet. (tsf)	Other Tests
1			TOPSOIL, silty sand, slightly moist, reddish brown.											
2		SM	Silty SAND with gravel, very dense, slightly moist, reddish brown.											
3					85-6"	7			19	52	29			
4														
5														
6														
7														
8														
9			Practical equipment refusal at approximately 8 feet.											
10														
11														
12														
13														
14														
15														
16														
17														
18														
19														
20														
21														
22														
23														
24														
25														
26														

Notes: Groundwater was not encountered during field investigation.

Test Keys

CBR = California Bearing Ratio
 C = Consolidation
 P = Percolation

PROJECT NO.: 140400



FIGURE NO.: 7

TEST HOLE LOG

No.: TH-6

PROJECT: Duchesne Court Addition
 CLIENT: DFCM
 LOCATION: See Figure 2.
 OPERATOR: Earth Core Drilling
 EQUIPMENT: Truck Mounted Hydraulic Drill Rig
 DEPTH TO WATER; INITIAL ∇ Not Encountered

Project No.: 140400
 Date: 4/30/2014
 Elevation: Not taken
 Logged By: P. Brinkerhoff

AT COMPLETION ∇ : Not Encountered

Depth (ft.)	Graphic Log	USCS	Description	Samples	TEST RESULTS											
					Blows per foot	Water Cont. (%)	Dry Dens. (pcf)	LL	PI	Gravel (%)	Sand (%)	Fines (%)	Pocket Penet. (tsf)	Other Tests		
1			FILL, silty sand with gravel and some cobbles.													
2																
3		SM	Silty SAND, very dense, slightly moist to dry, light brown.													
4				50-5"												
5																
6				50-3"												
7			Practical equipment refusal at approximately 5 1/2 feet.													
8																
9																
10																
11																
12																
13																
14																
15																
16																
17																
18																
19																
20																
21																
22																
23																
24																
25																
26																

Notes: Groundwater was not encountered during field investigation.

Test Keys

- CBR = California Bearing Ratio
- C = Consolidation
- P = Percolation

PROJECT NO.: 140400



FIGURE NO.: 8

TEST HOLE LOG

No.: TH-7

PROJECT: Duchesne Court Addition
CLIENT: DFCM
LOCATION: See Figure 2.
OPERATOR: Earth Core Drilling
EQUIPMENT: Truck Mounted Hydraulic Drill Rig
DEPTH TO WATER; INITIAL ∇ Not Encountered

Project No.: 140400
Date: 4/30/2014
Elevation: Not taken
Logged By: P. Brinkerhoff

AT COMPLETION ∇ : Not Encountered

Depth (ft.)	Graphic Log	USCS	Description	Samples	TEST RESULTS							Pocket Penet. (tsf)	Other Tests	
					Blows per foot	Water Cont. (%)	Dry Dens. (pcf)	LL	PI	Gravel (%)	Sand (%)			Fines (%)
1			FILL, silty sand with gravel, slightly moist, light brown, some cobbles.											
2														
3		SM	Silty SAND, very dense, dry to slightly moist, light brown.		50-5"	8				7	59	34		
4														
5			Practical equipment refusal at approximately 4 feet.											
6														
7														
8														
9														
10														
11														
12														
13														
14														
15														
16														
17														
18														
19														
20														
21														
22														
23														
24														
25														
26														

Notes: Groundwater was not encountered during field investigation.

Test Keys

CBR = California Bearing Ratio
 C = Consolidation
 P = Percolation

PROJECT NO.: 140400



FIGURE NO.: 9

TEST HOLE LOG

No.: TH-8

PROJECT: Duchesne Court Addition
CLIENT: DFCM
LOCATION: See Figure 2.
OPERATOR: Earth Core Drilling
EQUIPMENT: Truck Mounted Hydraulic Drill Rig
DEPTH TO WATER; INITIAL ∇ Not Encountered

Project No.: 140400
Date: 4/30/2014
Elevation: Not taken
Logged By: P. Brinkerhoff

AT COMPLETION ∇ : Not Encountered

Depth (ft.)	Graphic Log	USCS	Description	Samples	TEST RESULTS										
					Blows per foot	Water Cont. (%)	Dry Dens. (pcf)	LL	PI	Gravel (%)	Sand (%)	Fines (%)	Pocket Penet. (tsf)	Other Tests	
1			FILL, silty sand with gravel, slightly moist, light brown, some gravel.												
2			Clayey SAND, very dense, dry, light brown.												
3		SC			50-4"	5		25	10	4	55	41			
4															
5			Practical equipment refusal at approximately 4½ feet.												
6															
7															
8															
9															
10															
11															
12															
13															
14															
15															
16															
17															
18															
19															
20															
21															
22															
23															
24															
25															
26															

Notes: Groundwater was not encountered during field investigation.

Test Keys

- CBR = California Bearing Ratio
- C = Consolidation
- P = Percolation

PROJECT NO.: 140400



FIGURE NO.: 10

TEST HOLE LOG

No.: TH-9

PROJECT: Duchesne Court Addition
CLIENT: DFCM
LOCATION: See Figure 2.
OPERATOR: Earth Core Drilling
EQUIPMENT: Truck Mounted Hydraulic Drill Rig
DEPTH TO WATER; INITIAL ∇ Not Encountered

Project No.: 140400
Date: 4/30/2014
Elevation: Not taken
Logged By: P. Brinkerhoff

AT COMPLETION ∇ : Not Encountered

Depth (ft.)	Graphic Log	USCS	Description	Samples	TEST RESULTS										
					Blows per foot	Water Cont. (%)	Dry Dens. (pcf)	LL	PI	Gravel (%)	Sand (%)	Fines (%)	Pocket Penet. (tsf)	Other Tests	
1			TOPSOIL, silty sand with gravel, slightly moist, reddish brown.												
2			Silty SAND, very dense, dry, light brown.												
3		SM			50-2"										
4															
5															
6				Practical equipment refusal at approximately 5 feet.		50-2"									
7															
8															
9															
10															
11															
12															
13															
14															
15															
16															
17															
18															
19															
20															
21															
22															
23															
24															
25															
26															

Notes: Groundwater was not encountered during field investigation.

Test Keys
 CBR = California Bearing Ratio
 C = Consolidation
 P = Percolation

TEST HOLE LOG

No.: TH-10

PROJECT: Duchesne Court Addition
 CLIENT: DFCM
 LOCATION: See Figure 2.
 OPERATOR: Earth Core Drilling
 EQUIPMENT: Truck Mounted Hydraulic Drill Rig

Project No.: 140400
 Date: 4/30/2014
 Elevation: Not taken
 Logged By: P. Brinkerhoff

DEPTH TO WATER; INITIAL ∇ Not Encountered

AT COMPLETION ∇ : Not Encountered

Depth (ft.)	Graphic Log	USCS	Description	Samples	TEST RESULTS							Pocket Penet. (tsf)	Other Tests	
					Blows per foot	Water Cont. (%)	Dry Dens. (pcf)	LL	PI	Gravel (%)	Sand (%)			Fines (%)
1			TOPSOIL, silty sand with gravel, slightly moist, reddish brown.											
2			Clayey SAND, very dense, dry to slightly moist, light brown.											
3		SC			50-2"									
4														
5			Practical equipment refusal at approximately 4½ feet.	X		4		23	9	0	64	36		
6														
7														
8														
9														
10														
11														
12														
13														
14														
15														
16														
17														
18														
19														
20														
21														
22														
23														
24														
25														
26														

Notes: Groundwater was not encountered during field investigation.

Test Keys

CBR = California Bearing Ratio
 C = Consolidation
 P = Percolation

PROJECT NO.: 140400



FIGURE NO.: 12

TEST HOLE LOG

No.: TH-11

PROJECT: Duchesne Court Addition
CLIENT: DFCM
LOCATION: See Figure 2.
OPERATOR: Earth Core Drilling
EQUIPMENT: Truck Mounted Hydraulic Drill Rig
DEPTH TO WATER; INITIAL ∇ Not Encountered

Project No.: 140400
Date: 4/30/2014
Elevation: Not taken
Logged By: P. Brinkerhoff

AT COMPLETION ∇ : Not Encountered

Depth (ft.)	Graphic Log	USCS	Description	Samples	TEST RESULTS							Other Tests			
					Blows per foot	Water Cont. (%)	Dry Dens. (pcf)	LL	PI	Gravel (%)	Sand (%)		Fines (%)	Pocket Penet. (tsf)	
1			TOPSOIL, silty sand with gravel, slightly moist, reddish brown.												
2		SC	Clayey SAND, very dense, dry t slightly moist, light brown.												
3															
4															
5															
6			Practical equipment refusal at approximately 5 feet.											P	
7															
8															
9															
10															
11															
12															
13															
14															
15															
16															
17															
18															
19															
20															
21															
22															
23															
24															
25															
26															

Notes: Groundwater was not encountered during field investigation.

Test Keys

- CBR = California Bearing Ratio
- C = Consolidation
- P = Percolation

PROJECT NO.: 140400



FIGURE NO.: 13

LEGEND

PROJECT: Duchesne Court Addition
 CLIENT: DFCM

Date: 4/30/2014
 Logged By: P. Brinkerhoff

UNIFIED SOIL CLASSIFICATION SYSTEM

USCS

	MAJOR SOIL DIVISIONS	USCS	SYMBOL	TYPICAL SOIL DESCRIPTIONS	
COARSE GRAINED SOILS (More than 50% retained on No. 200 Sieve)	GRAVELS (More than 50% of coarse fraction retained on No. 4 Sieve)	CLEAN GRAVELS (less than 5% fines)		GW Well-Graded Gravel, May Contain Sand, Very Little Fines	
		GRAVELS WITH FINES (More than 12% fines)		GP Poorly Graded Gravel, May Contain Sand, Very Little Fines	
		SANDS (50% or more of coarse fraction passes No. 4 Sieve)	CLEAN SANDS (less than 5% fines)		SW Well-Graded Sand, May Contain Gravel, Very Little Fines
			SANDS WITH FINES (More than 12% fines)		SP Poorly Graded Sand, May Contain Gravel, Very Little Fines
	FINE GRAINED SOILS (More than 50% passing No. 200 Sieve)	SILTS AND CLAYS (Liquid Limit less than 50)		CL Lean Clay, Inorganic, May Contain Gravel and/or Sand	
				ML Silt, Inorganic, May Contain Gravel and/or Sand	
				OL Organic Silt or Clay, May Contain Gravel and/or Sand	
		SILTS AND CLAYS (Liquid Limit greater than 50)		CH Fat Clay, Inorganic, May Contain Gravel and/or Sand	
				MH Elastic Silt, Inorganic, May Contain Gravel and/or Sand	
				OH Organic Silt or Clay, May Contain Gravel and/or Sand	
HIGHLY ORGANIC SOILS				PT Peat, Primarily Organic Matter	

SAMPLER DESCRIPTIONS

-  SPLIT SPOON SAMPLE (1 3/8 inch inside diameter)
-  MODIFIED CALIFORNIA SAMPLE (2 inch outside diameter)
-  SHELBY TUBE (3 inch outside diameter)
-  BLOCK SAMPLE
-  BAG/BULK SAMPLE

WATER SYMBOLS

-  Water level encountered during field exploration
-  Water level encountered at completion field exploration


- NOTES:
1. The logs are subject to the limitations, conclusions, and recommendations in this report.
 2. Results of test conducted on samples recovered are reported on the logs and any applicable graphs.
 3. Strata lines on the logs represent approximate boundaries only. Actual transition may be gradual.
 4. In general, USCS symbols shown on the logs are based on visual methods only; actual designations (based on laboratory test) may vary.

GRAIN SIZE DISTRIBUTION

U.S. SIEVE OPENING, inches

U.S. SIEVE NUMBERS

HYDROMETER

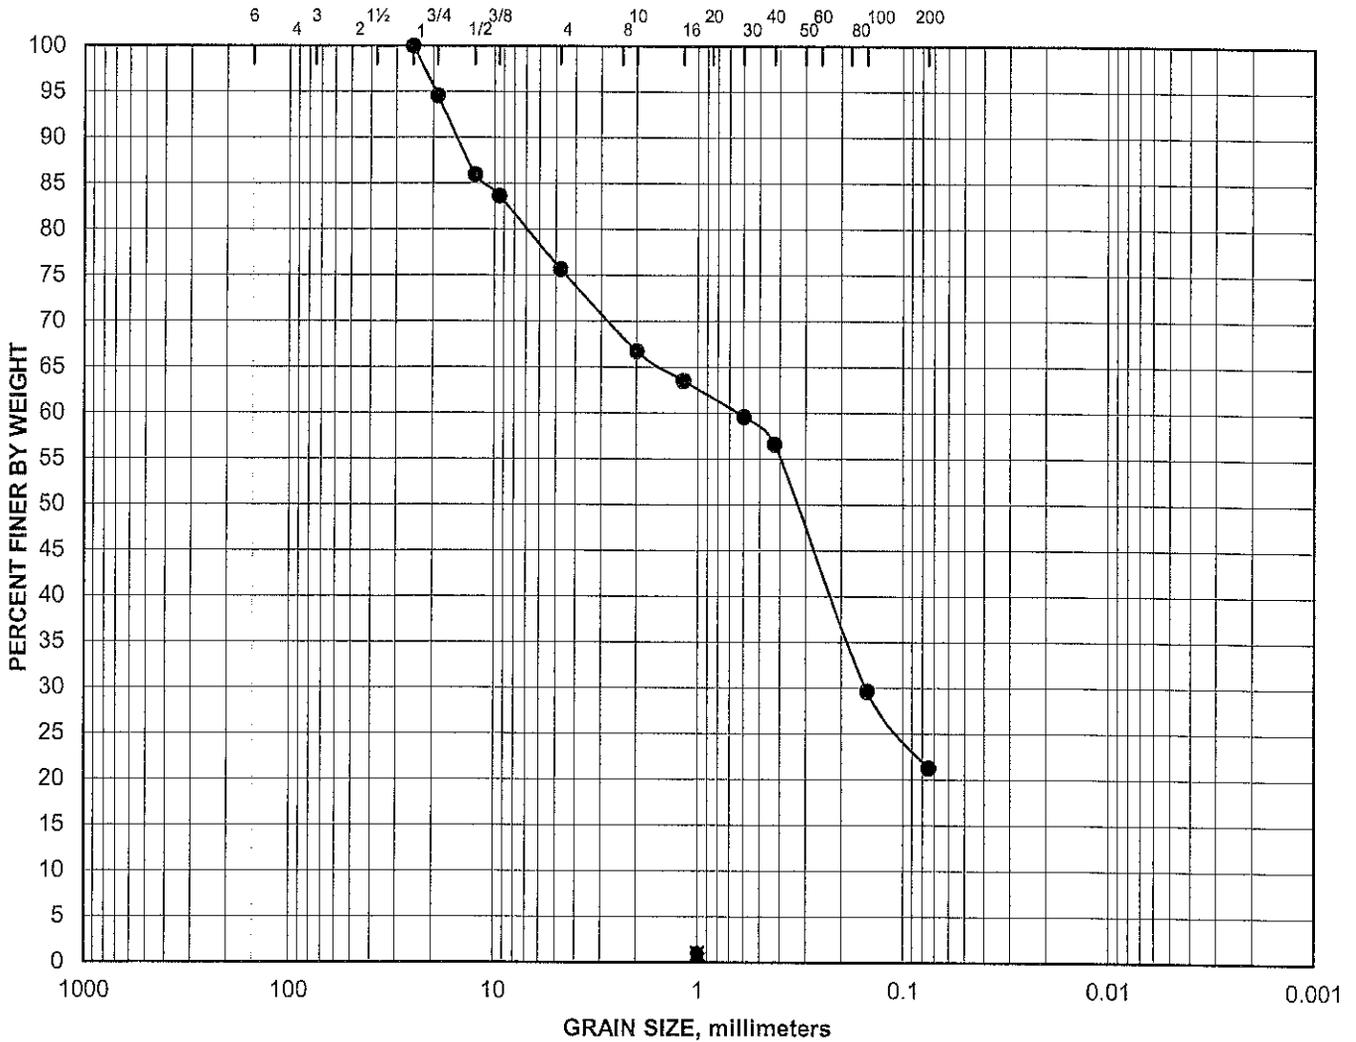

COBBLES	GRAVEL		SAND			SILT OR CLAY
	coarse	fine	coarse	medium	fine	

Specimen Identification	Classification						MC%	LL	PL	PI	Cc	Cu
● TH-3 @ 2.5'	FILL (Silty Sand with gravel (SM))						11					
■												
▲												
◆												
X												
Specimen Identification	D100	D85	D60	D30	D15	D10	%Gravel	%Sand	%Silt	%Clay		
● TH-3 @ 2.5'	25.0	11.1	0.642	0.152			24	55	21			
■												
▲												
◆												
X												

PROJECT NO.: 140377



FIGURE NO.: 15